



AVVENI SPOT PALADIO



SATTLER

Product-information: One light head with an adapter for PALADIO TRACK (48V-DALI). Light head can be taken off and is fully adjustable through a magnetic hinge system. Light heads are available as flood or spot versions (beam angle with lenses for 26 and 34 degrees). Cable suspensions are adjustable.

Design: Ulrich Sattler | Michael Schmidt, Code2design

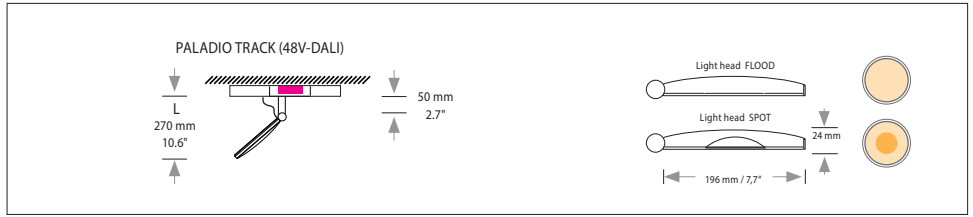

STRUCTURE

Type	W Ø / H mm	W Ø / H inches	LED Watt	weight kg ²⁾ / lbs ²⁾	STRUCTURE				
					Type No.	Finish 1	DIM.	Power Supply Cable	Mounting Version
	Ø 196 / 270 mm	Ø 7.7 / 10.6"	12,5 W	1.6 / 3.5	1805.	XX.	XX.	XX.	XX.
Finish 1 track adapter	14 black matt				XXXX.	14	XX.	XX.	XX.
Dimmer	DALI-2 Dimming only with dimmable PALADIO TRACK				XXXX.	XX.	06	XX.	XX.
	CASAMBI*	*Each head individually switch- and dimmable			XXXX.	XX.	08	XX.	XX.
Power Supply Cable	without power supply cable				XXXX.	XX.	XX.	00	XX.
Mounting Version	Z				XXXX.	XX.	XX.	XX.	0Z

1805. 14 . . 00 0Z

Order No. STRUCTURE

LIGHT HEAD

Type	Finish 2	Finish 3	LED Kelvin	Beam angle	LIGHT HEAD						
					Type No.	Finish 2	Finish 3				
	XX.	XX.	XX.	XX.	01	XX.	XX.	XX.	XX.	XX.	XX.
Finish 2 Light head outside ring	12 white matt, 62 (14) black matt, 22 aluminium polished				Standard	XX.	12	XX.	XX.	XX.	XX.
						XX.	62	XX.	XX.	XX.	XX.
						XX.	22	XX.	XX.	XX.	XX.
Finish 3 Light head top cover	60 silver anodised, 61 gold anodised, 62 black anodised				Standard	XX.	XX.	60	XX.	XX.	XX.
						XX.	XX.	61	XX.	XX.	XX.
						XX.	XX.	62	XX.	XX.	XX.
LED	Extra warm-white 2700 K					XX.	XX.	XX.	27	XX.	XX.
CRI >92	Warm-white 3000 K					XX.	XX.	XX.	30	XX.	XX.
SELV	Neutral-white 4000 K					XX.	XX.	XX.	40	XX.	XX.
Beam Angle	FLOOD 12,5 W 1282' Lumen				Standard	XX.	XX.	XX.	XX.	99	00
	SPOT 26° 12,5 W 1550' Lumen UGR<19					XX.	XX.	XX.	XX.	26	00
	SPOT 34° 12,5 W 1550' Lumen					XX.	XX.	XX.	XX.	34	00

CASAMBI WALL SWITCH

CASAMBI wall-switch	white	207. 00. 00. 00. 11
CASAMBI wall-switch	black	207. 00. 00. 00. 10

Order No. LIGHT HEAD FLOOD

.. 00 00



Casambi wall-switch is a wireless user interface that can be configured via the Casambi app. The four target buttons can control a scene or an animation of the user's choice or simply one luminaire, one luminaire group or all lights together if so desired. Up to 4 groups may be separately programmed. It comes with a wall mounting plate. The switch can be attached to the plate as it is equipped with magnets.

Order No. LIGHT HEAD SPOT

.. 00 00

Technical data is subject to change. Errors and omissions excepted 1) Net lumen output: Losses due to diffusors and reflectors are considered. Lumen values refer to an ambient temperature of max. 35° C / 95° F.