





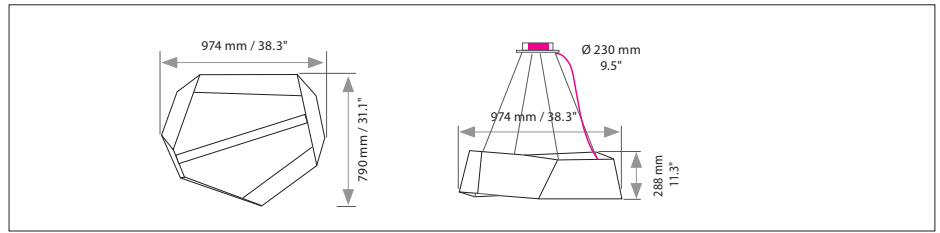

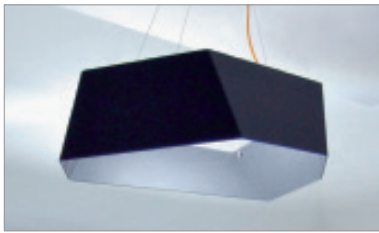








ANGOLO

Housing: Aluminium housing, powder coated.
Design: MICHAEL SCHMIDT



Size: L x W x H mm	Inches	LED Watt	Lumen ¹⁾	Weight ²⁾ kg/lbs	Item No.	LED	Dimming	LED	Finishes	Power supply cable	Mounting version	
Size	974 x 790 x 288 mm	38.3 x 31.1 x 11.3"	13+6	697+278	11 / 24.3	700.	X X.	X X.	X X.	X X.	X X X.	X
LED	 Standard: Neutral-white Optional: Warm-white Extra warm-white	Standard: Neutral-white	4000 K	X X X.	40.	X X.	40.	X X.	X X X.	X		
		Optional: Warm-white	3000 K	X X X.	30.	X X.	30.	X X.	X X X.	X		
		Optional: Extra warm-white	2700 K	X X X.	27.	X X.	27.	X X.	X X X.	X		
Dimming	 Standard: Without Dimmer Optional: 0 - 10 V DALI CASAMBI	Standard: Without Dimmer		X X X.	X X.	02.	X X.	X X.	X X X.	X		
		Optional: 0 - 10 V		X X X.	X X.	52.	X X.	X X.	X X X.	X		
		Optional: DALI		X X X.	X X.	62.	X X.	X X.	X X X.	X		
Optional: CASAMBI		X X X.	X X.	82.	X X.	X X.	X X X.	X				
Finish	Standard:  12 white, powder coated, similar RAL 9003 Optional (Powder coated):  10 black fine textured	Standard: 12 white, powder coated, similar RAL 9003		X X X.	X X.	X X.	X X.	---	X X X.	X		
		Optional (Powder coated): 10 black fine textured		X X X.	X X.	X X.	X X.	X X.	---	X X X.	X	
Power supply cable	Standard:  Z 75 red Optional:  Z 70 Silver  Z 71 white  Z 72 grey  Z 73 black  Z 74 orange  Z 76 green	Standard: Z 75 red		X X X.	X X.	X X.	X X.	X X.	---	X		
		Optional: Z 70 Silver, Z 71 white, Z 72 grey, Z 73 black, Z 74 orange, Z 76 green		X X X.	X X.	X X.	X X.	X X.	X X.	---	X	
Mounting Version	 4-point suspension			X X X.	X X.	X X.	X X.	X X.	X X X.	E		

Including steel cable suspension 3000mm / 118" and power supply cable 3000mm / 118"



Canopy:
 Type/Size mm / inch
 Ø cover plate / body / H
 DB 230 Ø Ø 230 / 210 / 60 mm / 9.5 / 8.3 / 2.3" E
 Colour: 12 white, similar RAL 9003, contact factory for other finishes
 USA/Canada: Canopy mounts to 4" octagonal junction box.

For use with Mounting version E
 Protective rating IP 20

▶

700.	---	---	---	---	---	E.
------	-----	-----	-----	-----	-----	----

Complete order number

Input voltage for all external power supply units and canopy is 220-240 VAC 50-60 Hz

