



SATTLER



AVVENI

CEILING² asymmetrical



Product-information: Aluminium structure with 2 light heads. Each light head can be taken off and is fully adjustable through a magnetic hinge system. Light heads are available as flood or spot versions (lenses with 26 and 34 degrees). Cable suspensions are adjustable.


Design: Ulrich Sattler | Michael Schmidt, Code2design

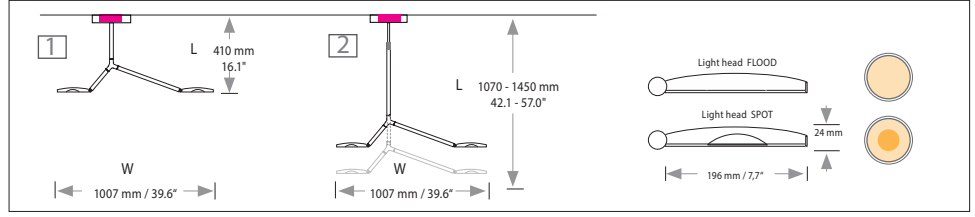

STRUCTURE

Type	L / W mm	L / W inches	LED Watt	weight kg ²⁾ / lbs ²⁾	STRUCTURE				
					Type No.	Finish 1	DIM	Power Supply Cable	Mounting Version
1	L 410 / W 1007	L 16.1 / W 39.6"	25 W	3,2 / 7.1	1121.	XX.	XX.	XX.	XX.
2	L 1070 - 1450 / W 1007	L 42.1 - 57.0 / W 39.6"	25 W	3,5 / 7.7	1122.	XX.	XX.	XX.	XX.
Finish 1 Structure	12 white matt RAL 9003 14 black matt 22 aluminium polished	Standard	XXXX.	12	XX.	XX.	XX.	XX.	
Dimmer	0-10 V DALI CASAMBI	Standard Standard	XXXX.	XX.	05	XX.	XX.	XX.	
Power Supply Cable	without power supply cable		XXXX.	XX.	XX.	00	XX.		
Mounting Version	P	Standard	XXXX.	XX.	XX.	XX.	0P		


light heads only dimmable together



Order No. STRUCTURE

LIGHT HEAD

Type	Finish 2	Finish 3	LED Kelvin	Beam angle					
				XX	XX	XX			
Finish 2 Light head outside ring	12 white matt RAL 9003 62 (14) black matt 22 aluminium polished	Standard	XX.	12	XX.	XX.	XX.	XX.	XX.
Finish 3 Light head top cover	60 silver anodised 61 gold anodised 62 black anodised	Standard	XX.	XX.	60	XX.	XX.	XX.	XX.
LED	Extra warm-white 2700 K Warm-white 3000 K Neutral-white 4000 K		XX.	XX.	XX.	27	XX.	XX.	XX.
Beam Angle	FLOOD 2 x 12,5 W 1282 ¹ Lumen		XX.	XX.	XX.	XX.	99	00	00
	SPOT 26° 12,5 W 1550 ¹ Lumen UGR<19		XX.	XX.	XX.	XX.	26	00	00
	SPOT 34° 12,5 W 1550 ¹ Lumen		XX.	XX.	XX.	XX.	34	00	00

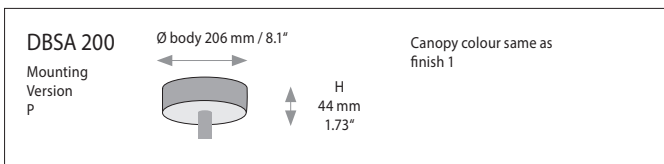

Input voltage for canopies is 100-277 VAC 50-60 Hz

Quantity Order No. LIGHT HEAD

Quantity Order No. LIGHT HEAD

Flood and spot heads may be mixed within one structure

Quantity Order No. Accessories (page 2)



Technical data is subject to change. Errors and omissions excepted 1) Net lumen output: Losses due to diffusors and reflectors are considered. Lumen values refer to an ambient temperature of max. 35° C / 95° F. 2) Weight of lights without remote technical unit or canopy.

AVVENI

ACCESSORIES

CASAMBI WALL SWITCH



CASAMBI wall-switch
CASAMBI wall-switch

white
black

207. 00. 00. 00. 11
207. 00. 00. 00. 10

Casambi wall-switch is a wireless user interface that can be configured via the Casambi app. The four target buttons can control a scene or an animation of the user's choice or simply one luminaire, one luminaire group or all lights together if so desired. Up to 4 groups may be separately programmed. It comes with a wall mounting plate. The switch can be attached to the plate as it is equipped with magnets.