




# SATTLER

## AVVENI CEILING 4



**Product-information:** Aluminium structure with 4 light heads. Each light head can be taken off and is fully adjustable through a magnetic hinge system. Light heads are available as flood or spot versions (lenses with 26 and 34 degrees).

**Design:** Ulrich Sattler | Michael Schmidt, Code2design

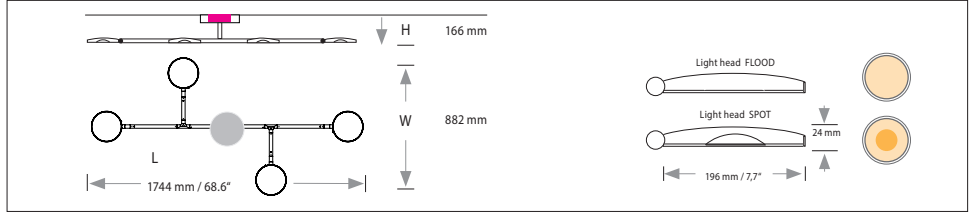


### STRUCTURE

Type	L / W / H mm	L / W / H inches	LED Watt	weight kg <sup>2)</sup> / lbs <sup>2)</sup>	STRUCTURE				
					Type No.	Finish 1	DIM	Power Supply Cable	Mounting Version
	L 1744 / W 882 / H 166	L 68.6 / W 34.7 / H 6.5"	50 W	4.0 / 8.8	1154.	XX.	XX.	XX.	XX.
Finish 1 Structure	12 white matt RAL 9003	14 black matt	22 aluminium polished	Standard	XXXX.	12	XX.	XX.	XX.
					XXXX.	14	XX.	XX.	XX.
					XXXX.	22	XX.	XX.	XX.
Dimmer	0-10 V DALI CASAMBI			Standard Standard	XXXX.	XX.	05	XX.	XX.
					XXXX.	XX.	06	XX.	XX.
					XXXX.	XX.	08	XX.	XX.
Power Supply Cable	without power supply cable				XXXX.	XX.	XX.	00	XX.
Mounting Version	P			Standard	XXXX.	XX.	XX.	XX.	0P

### LIGHT HEAD

Type	Finish 2	Finish 3	LED	LIGHT HEAD							
				Beam angle	Kelvin	Beam angle					
	XX.	XX.	XX.	XX.	XX.	XX.					
Finish 2 Light head outside ring	12 white matt RAL 9003	62 (14) black matt	22 aluminium polished	Standard	XX.	12	XX.	XX.	XX.	XX.	
					XX.	62	XX.	XX.	XX.	XX.	
					XX.	22	XX.	XX.	XX.	XX.	
Finish 3 Light head top cover	60 silver anodised	61 gold anodised	62 black anodised	Standard	XX.	XX.	60	XX.	XX.	XX.	
					XX.	XX.	61	XX.	XX.	XX.	
					XX.	XX.	62	XX.	XX.	XX.	
LED	SELV	Extra warm-white	2700 K	Standard	XX.	XX.	27	XX.	XX.	XX.	
		Warm-white	3000 K		XX.	XX.	30	XX.	XX.	XX.	
		Neutral-white	4000 K		XX.	XX.	40	XX.	XX.	XX.	
Beam Angle	FLOOD 4 x	12,5 W   1282 <sup>1</sup> Lumen		Standard	XX.	XX.	XX.	XX.	99	00	00
	SPOT 26°	12,5 W   1550 <sup>1</sup> Lumen   UGR<19			XX.	XX.	XX.	XX.	26	00	00
	SPOT 34°	12,5 W   1550 <sup>1</sup> Lumen			XX.	XX.	XX.	XX.	34	00	00

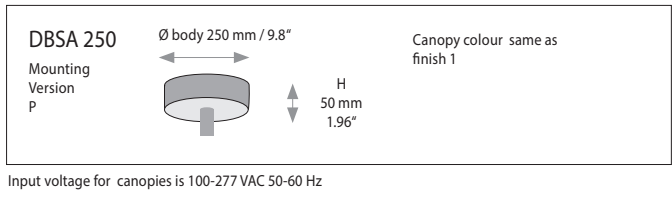

Quantity  Order No. LIGHT HEAD

Quantity  Order No. LIGHT HEAD

Flood and spot heads may be mixed within one structure

Quantity  Order No. Accessories (page 2)

Handcrafted in Germany, certified quality  
 Conforms to UL-STD 1598 Certified to CSA-STD C22.2 No.250.0-08  
 IP 20 Protective rating  
 180° Tilttable  
 360° Rotatable  
 Light distribution direct  
 Protection class I  
 Luminaires are suitable for mounting on ordinary flammable materials, which have an inflammation point of at least 200° C. / 392° F.

Technical data is subject to change. Errors and omissions excepted 1) Net lumen output: Losses due to diffusors and reflectors are considered. Lumen values refer to an ambient temperature of max. 35° C / 95° F. 2) Weight of lights without remote technical unit or canopy.

## AVVENI

### ACCESSORIES

---

#### CASAMBI WALL SWITCH



CASAMBI wall-switch

white

207. 00. 00. 00. 11

CASAMBI wall-switch

black

207. 00. 00. 00. 10

Casambi wall-switch is a wireless user interface that can be configured via the Casambi app. The four target buttons can control a scene or an animation of the user's choice or simply one luminaire, one luminaire group or all lights together if so desired. Up to 4 groups may be separately programmed. It comes with a wall mounting plate. The switch can be attached to the plate as it is equipped with magnets.