




SATTLER

AVVENI CONCRETE



Product-information: Concrete base with one light head. The light head can be taken off and is fully adjustable through a magnetic hinge system. Light head is available as flood or spot version (lenses with 26 and 34 degrees).

Design: Ulrich Sattler | Michael Schmidt, Code2design

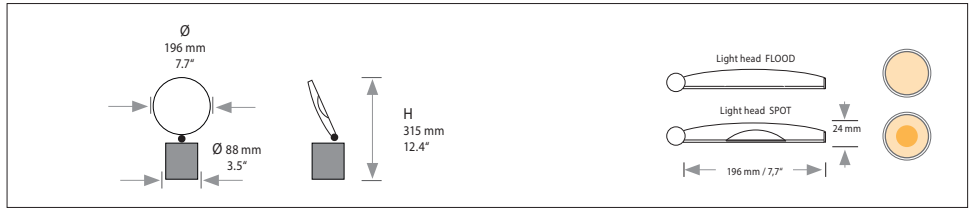

STRUCTURE

Type	H/Ø mm	H/Ø inches	LED Watt	weight kg ²⁾ / lbs ²⁾	STRUCTURE				
					Type No.	Finish 1	DIM	Power Supply Cable	Mounting Version
	H 315 / Ø 88	H 12.4" / Ø 3.5	12,5 W	2.0 / 4.4	1155.	XX.	XX.	XX.	XX.
Finish 1					XXXX.	00	XX.	XX.	XX.
Dimmer		Push button for dimming CASAMBI Head switch- and dimmable		Standard	XXXX.	XX.	07 08	XX.	XX.
Power Supply Cable	power supply cable, 2800 mm / 110"		80 PVC black	Standard	XXXX.	XX.	XX.	80	XX.
Mounting Version		pluggable on the lamp cord included country-specific plug incl. switch			XXXX.	XX.	XX.	XX.	0N

Order No. STRUCTURE: 1155. 00 ... 80 0N

LIGHT HEAD

Type	Finish 2	Finish 3	LED Kelvin	Beam angle	Type No.	Finish 2	Finish 3	LED	Beam angle
Type					01	XX.	XX.	XX	XX
Finish 2 Light head outside ring	12 white matt RAL 9003	62 (14) black matt	22 aluminium polished	Standard	XX.	12 62 22	XX.	XX	XX
Finish 3 Light head top cover	60 silver anodised	61 gold anodised	62 black anodised	Standard	XX.	XX.	60 61 62	XX	XX
LED CRI >92		Extra warm-white 2700 K	Warm-white 3000 K		XX.	XX.	XX.	27 30 40	XX
SELV		Neutral-white 4000 K			XX.	XX.	XX.	40	XX
Beam Angle	FLOOD	12,5 W 1282 ¹⁾ Lumen		Standard	XX.	XX.	XX.	99	00
	SPOT 26°	12,5 W 1550 ¹⁾ Lumen UGR<19			XX.	XX.	XX.	26	00
	SPOT 34°	12,5 W 1550 ¹⁾ Lumen			XX.	XX.	XX.	34	00

Base Ø 88 mm / 3.5"
Standard: Concrete

Each concrete base is unique, inclusions and surface can vary.

Order No. LIGHT HEAD FLOOD: 00 00

Order No. LIGHT HEAD SPOT: 00 00

Order No. Accessories (page 2): ... 00 00 00 ..

Input voltage for all external power supply units and canopies is 100-240 VAC 50/60 Hz

Handcrafted in Germany, certified quality
 IP 20 Protective rating
 180° Tiltable
 360° Rotatable
 Light distribution direct
 Protection class III: only suitable for very low voltage supply (<50V)
 Luminaires are suitable for mounting on ordinary flammable materials, which have an inflammation point of at least 200° C. / 392° F.

Technical data is subject to change. Errors and omissions excepted 1) Net lumen output: Losses due to diffusors and reflectors are considered. Lumen values refer to an ambient temperature of max. 35° C / 95° F. 2) Weight of lights without remote technical unit or canopy.

AVVENI

ACCESSORIES

CASAMBI WALL SWITCH



CASAMBI wall-switch
CASAMBI wall-switch

white
black

207. 00. 00. 00. 11
207. 00. 00. 00. 10

Casambi wall-switch is a wireless user interface that can be configured via the Casambi app. The four target buttons can control a scene or an animation of the user's choice or simply one luminaire, one luminaire group or all lights together if so desired. Up to 4 groups may be separately programmed. It comes with a wall mounting plate. The switch can be attached to the plate as it is equipped with magnets.