




AVVENI



DOWNLIGHT pure



Product-information: Light heads are available as flood or spot versions (lenses with 26 and 34 degrees).
 Design: Ulrich Sattler | Michael Schmidt, Code2design

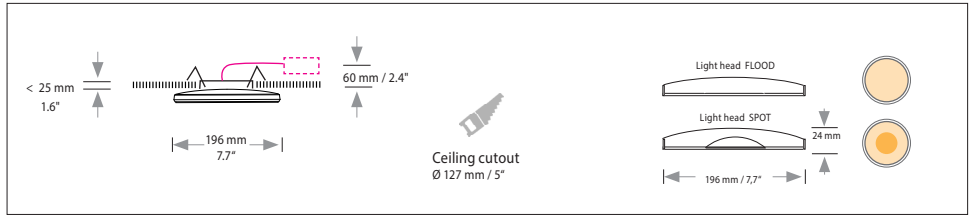

STRUCTURE

Type	Installation Ø / depth mm	Installation Ø / depth inches	LED Watt	weight kg ²⁾ / lbs ²⁾	STRUCTURE				
					Type No.	Finish 1	DIM	Power Supply Cable	Mounting Version
	Ø 127 / 60mm	Ø 5 / 2.4"	12,5 W	0.8 / 1.8	1157.	xx.	xx.	xx.	xx.
Finish 1					xxxx.	00	xx.	xx.	xx.
Dimmer	DALI-2 TRIAC		Standard		xxxx.	xx.	06 11	xx.	xx.
Power Supply Cable	without visible power supply cable				xxxx.	xx.	xx.	00	xx.
Mounting Version	U up to ceiling thickness ≤ 25 mm		Standard		xxxx.	xx.	xx.	xx.	0U

Recessed in ceiling with external power supply

Order No. STRUCTURE

LIGHT HEAD

Type	Finish 2	Finish 3	LED Kelvin	Beam angle	LIGHT HEAD			
					Type No.	Finish 2	Finish 3	
	xx.	xx.	xx.	xx.	02	xx.	xx.	xx.
Finish 2 Light head outside ring	12 white matt RAL 9003	14 black matt			Standard	xx.	12 14	xx. xx.
Finish 3 Light head top cover same as finish 2	12 white matt RAL 9003	14 black matt			Standard	xx. xx.	xx. 12 14	xx. xx. xx. xx.
LED CRI >92 SELV		Extra warm-white 2700 K	27	xx.	xx.	xx.	xx.	xx.
		Warm-white 3000 K	30	xx.	xx.	xx.	xx.	xx.
		Neutral-white 4000 K	40	xx.	xx.	xx.	xx.	xx.
Beam Angle	FLOOD	12,5 W 1282 ¹⁾ Lumen			Standard	xx.	xx.	xx.
	SPOT 26°	12,5 W 1550 ¹⁾ Lumen UGR<19				xx.	xx.	xx.
	SPOT 34°	12,5 W 1550 ¹⁾ Lumen				xx.	xx.	xx.

Order No. LIGHT HEAD FLOOD

Order No. LIGHT HEAD SPOT

Input voltage for all external power supply units and canopies is 220-240 VAC 50-60 Hz



Handcrafted in Germany, certified quality



Conforms to UL-STD 1598 Certified to CSA-STD C22.2 No.250.0-08



Protective rating



Light distribution direct



Schutzklasse II Protection class II



Luminaires are suitable for mounting on ordinary flammable materials, which have an inflammation point of at least 200° C. / 392° F.

Technical data is subject to change. Errors and omissions excepted 1) Net lumen output: Losses due to diffusers and reflectors are considered. Lumen values refer to an ambient temperature of max. 35° C / 95° F. 2) Weight of lights without remote technical unit or canopy.