




SATTLER

AVVENI FLOOR



Product-information: Aluminium structure with one light head and metal stand. The light head can be taken off and is fully adjustable through a magnetic hinge system. Light head is available as flood or spot version (lenses with 26 and 34 degrees).
Design: Ulrich Sattler | Michael Schmidt, Code2design

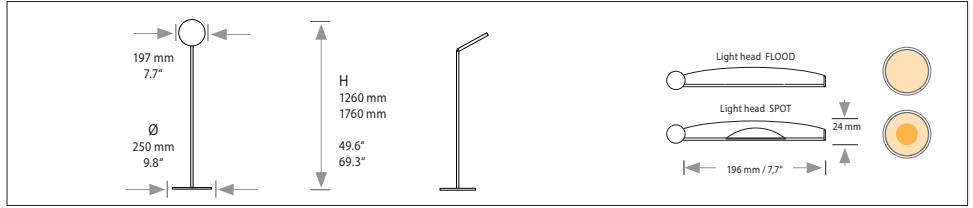

STRUCTURE

Type	H/Ø mm	H/Ø inches	LED Watt	weight kg ²⁾ / lbs ²⁾	STRUCTURE				
					Type No.	Finish 1	DIM	Power Supply Cable	Mounting Version
	H 1260 / Ø 250	H 49.6" / Ø 9.8	12,5 W	4,5 / 9,9	1105.	XX.	XX.	XX.	XX.
	H 1760 / Ø 250	H 69.3" / Ø 9.8	12,5 W	4,8 / 10,6	1106.	XX.	XX.	XX.	XX.
Finish 1 Structure	12 white matt RAL 9003	14 black matt	22 aluminum polished	Standard	XXXX.	12 14 22	XX.	XX.	XX.
Dimmer		Push button for dimming CASAMBI Head switch- and dimmable.	Standard		XXXX.	XX.	07 08	XX.	XX.
Power Supply Cable	power supply cable, 2800 mm / 110"		80 PVC black	Standard	XXXX.	XX.	XX.	80	XX.
Mounting Version					XXXX.	XX.	XX.	XX.	0N

LIGHT HEAD

Type	Finish 2	Finish 3	LED Kelvin	Beam angle								
				XX	XX	XX						
Finish 2 Light head outside ring	12 white matt RAL 9003	62 (14) black matt	22 aluminum polished	Standard	XX.	12 62 22	XX.	XX.	XX.	XX.	XX.	XX.
Finish 3 Light head top cover	60 silver anodised	61 gold anodised	62 black anodised	Standard	XX.	XX.	60 61 62	XX.	XX.	XX.	XX.	XX.
LED		Extra warm-white 2700 K			XX.	XX.	XX.	27	XX.	XX.	XX.	XX.
CRI >92		Warm-white 3000 K			XX.	XX.	XX.	30	XX.	XX.	XX.	XX.
		Neutral-white 4000 K			XX.	XX.	XX.	40	XX.	XX.	XX.	XX.
Beam Angle		FLOOD 12,5 W 1282 ¹ Lumen		Standard	XX.	XX.	XX.	XX.	99	00	00	00
		SPOT 26° 12,5 W 1550 ¹ Lumen UGR<19			XX.	XX.	XX.	XX.	26	00	00	00
		SPOT 34° 12,5 W 1550 ¹ Lumen			XX.	XX.	XX.	XX.	34	00	00	00

Metal stand Ø 250 mm / 9.8" Colour: Finish 1, structure white (12) – Stand white (12) Finish 1, structure black (14) – Stand black (14) Finish 1, structure polished (22) – Stand black (14)

Order No. LIGHT HEAD FLOOD 00 00

Order No. LIGHT HEAD SPOT 00 00

Order No. Accessories (page 2) 00 00 00 ..

Input voltage for all external power supply units and canopies is 100-240 VAC 50-60 Hz

Handcrafted in Germany, certified quality IP 20 Protective rating 180° Tiltable 360° Rotatable Light distribution direct Protection class III: only suitable for very low voltage supply (<50V) Luminaires are suitable for mounting on ordinary flammable materials, which have an inflammation point of at least 200° C. / 392° F.

Technical data is subject to change. Errors and omissions excepted 1) Net lumen output: Losses due to diffusors and reflectors are considered. Lumen values refer to an ambient temperature of max. 35° C / 95° F. 2) Weight of lights without remote technical unit or canopy.

AVVENI

ACCESSORIES

CASAMBI WALL SWITCH



CASAMBI wall-switch

white

207. 00. 00. 00. 11

CASAMBI wall-switch

black

207. 00. 00. 00. 10

Casambi wall-switch is a wireless user interface that can be configured via the Casambi app. The four target buttons can control a scene or an animation of the user's choice or simply one luminaire, one luminaire group or all lights together if so desired. Up to 4 groups may be separately programmed. It comes with a wall mounting plate. The switch can be attached to the plate as it is equipped with magnets.