




SATTLER

AVVENI PENDANT 4




Product-information: Aluminium structure with four light heads. Each light head can be taken off and is fully adjustable through a magnetic hinge system. Light heads are available as flood or spot versions (lenses with 26 and 34 degrees). Cable suspensions are adjustable.

Design: Ulrich Sattler | Michael Schmidt, Code2design

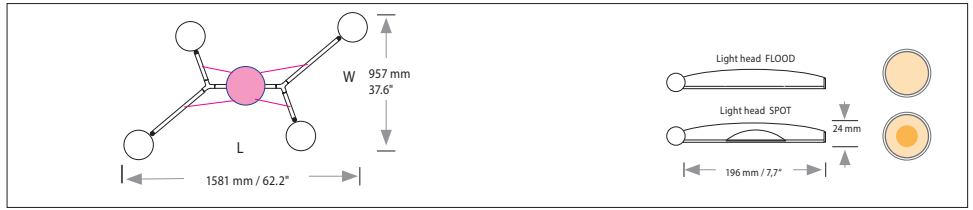

STRUCTURE

Type	L / W mm	L / W inches	LED Watt	weight kg ²⁾ / lbs ²⁾	STRUCTURE											
	L 1581 / W 957	L 62.2 / W 37.6"	50 W	4,0 / 8.8	Type No.	Finish 1	DIM	Power Supply	Mounting Cable	Version						
Finish 1 Structure	12 white matt RAL 9003	14 black matt	22 aluminium polished	Standard	xxxx.	12 14 22	xx.	xx.	xx.	xx.						
Dimmer	0-10 V DALI CASAMBI			Standard	xxxx.	xx.	05 06 08	xx.	xx.	xx.						
Power Supply Cable	power supply cable, silver 5000 mm, mounting version (A/B) without power supply cable, current-carrying suspension 3000 mm (F +R)			Standard	xxxx.	xx.	xx.	70 00	xx.	xx.						
Mounting Version					xxxx.	xx.	xx.	xx.	0x.							
Standard	Suspension with 4 steel cables 5000mm and external power supply unit in separate canopy or suspended ceiling				Optional				Suspension with 3 steel cables 5000 mm and external power supply unit in suspended ceiling		Suspension with canopy and 4 current-carrying steel cables 3000mm Min. suspension height 0,4m		Suspension with 4 current-carrying steel cables 118.1" and 4 cavity wall boxes, power supply in suspended ceiling		OrderNo.STRUCTURE	



LIGHT HEAD

Type	Finish 2	Finish 3	LED Kelvin	Beam angle	Type No.	Finish 2	Finish 3	LED	Beam angle
Finish 2 Light head outside ring	12 white matt RAL 9003	62 (14) black matt	22 aluminium polished	Standard	01	xx.	xx.	xx.	xx.
Finish 3 Light head top cover	60 silver anodised	61 gold anodised	62 black anodised	Standard	xx.	xx.	60 61 62	xx.	xx.
LED	Extra warm-white 2700 K				xx.	xx.	xx.	27	xx.
CRI >92	Warm-white 3000 K				xx.	xx.	xx.	30	xx.
	Neutral-white 4000 K				xx.	xx.	xx.	40	xx.
Beam Angle	FLOOD 4 x 12,5 W 1282 ¹⁾ Lumen			Standard	xx.	xx.	xx.	xx.	99 00 00
	SPOT 26° 12,5 W 1550 ¹⁾ Lumen UGR<19				xx.	xx.	xx.	xx.	26 00 00
	SPOT 34° 12,5 W 1550 ¹⁾ Lumen				xx.	xx.	xx.	xx.	34 00 00

Quantity Order No. LIGHT HEAD

Quantity Order No. LIGHT HEAD

Flood and spot heads may be mixed within one structure

Quantity Order No. Accessories (page 2)



Handcrafted in Germany, certified quality



Conforms to UL-STD 1598 Certified to CSA-STD C22.2 No.250.0-08



Protective rating



Light distribution direct



Protection class III: only suitable for very low voltage supply (<50V)




Luminaires are suitable for mounting on ordinary flammable materials, which have an inflammation point of at least 200° C / 392° F.

Technical data is subject to change. Errors and omissions excepted 1) Net lumen output: Losses due to diffusors and reflectors are considered. Lumen values refer to an ambient temperature of max. 35° C / 95° F. 2) Weight of lights without remote technical unit or canopy.

AVVENI PENDANT 4

Product-information: Aluminium structure with four light heads. Each light head can be taken off and is fully adjustable through a magnetic hinge system. Light heads are available as flood or spot versions (lenses with 26 and 34 degrees). Cable suspensions are adjustable.

Design: Ulrich Sattler | Michael Schmidt, Code2design

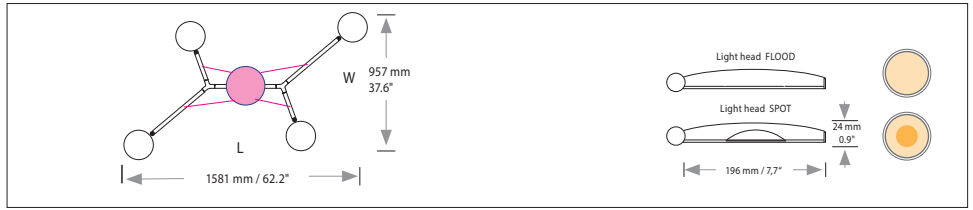

www.sattler-lighting.com

MOUNTING VERSION

Mounting Version B	Mounting Version A/R	Mounting Version F
<p>DBS 300 colour white</p> <p>H 53 mm / 2.1"</p> <p>Ø body 297 mm / 11.7"</p>	<p>power supply</p> <p>W 43 mm / 1.7"</p> <p>H 30 mm / 1.2"</p> <p>length 293 mm / 11.5"</p>	<p>DB 290 Ø body 270 mm / 10.6" colour white</p> <p>H 60 mm / 2.3"</p> <p>Ø Cover plate 290 mm / 11.4"</p>

Input voltage for all external power supply units and canopies is 220-240 VAC 50/60 Hz

ACCESSORIES

CASAMBI WALL SWITCH




CASAMBI wall-switch
CASAMBI wall-switch

white
black

207. 00.00.00.11
207. 00.00.00.10

Casambi wall-switch is a wireless user interface that can be configured via the Casambi app. The four target buttons can control a scene or an animation of the user's choice or simply one luminaire, one luminaire group or all lights together if so desired. Up to 4 groups may be separately programmed. It comes with a wall mounting plate. The switch can be attached to the plate as it is equipped with magnets.

Power cable cover plate



Consisting of a cavity ceiling box with 80mm round metal cover.
Applicable to mounting version A/B.

white

200. 00.00.00.12