



SATTLER

AVVENI




SINGLE




Product-information: Aluminium structure with 1 light head. Light head can be taken off and is fully adjustable through a magnetic hinge system. Light heads are available as flood or spot versions (lenses with 26 and 34 degrees). Cable suspensions are adjustable.

Design: Ulrich Sattler | Michael Schmidt, Code2design

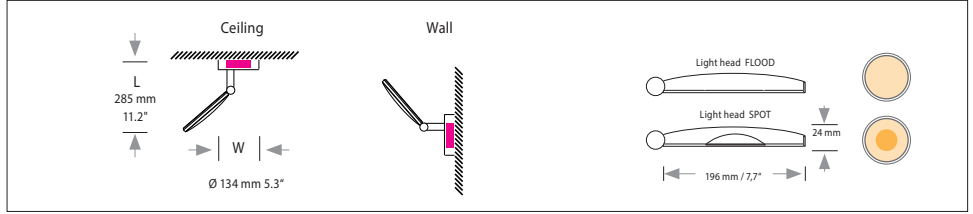

STRUCTURE


Type	W Ø / L mm	W Ø / L inches	LED Watt	weight kg ²⁾ / lbs ²⁾	STRUCTURE				
					Type No.	Finish 1	DIM	Power Supply	Mounting Cable
	Ø 134 / 285	Ø 5.3 / 11.2"	12,5 W	1.6 / 3.5	1112.	XX.	XX.	XX.	XX.
Finish 1 Structure	12 white matt RAL 9003 14 black matt 22 aluminium polished				XXXX.	12	XX.	XX.	XX.
					XXXX.	14	XX.	XX.	XX.
Dimmer	DALI-2 CASAMBI TRIAC		Standard		XXXX.	XX.	06	XX.	XX.
					XXXX.	XX.	08	XX.	XX.
					XXXX.	XX.	11	XX.	XX.
Power Supply Cable	without power supply cable				XXXX.	XX.	XX.	00	XX.
Mounting Version	P		Standard		XXXX.	XX.	XX.	00	0P



Order No. STRUCTURE: **... .. 00 0P**

LIGHT HEAD

Type	Finish 2	Finish 3	LED Kelvin	Beam angle						
				XX	XX	XX				
				01	XX.	XX.	XX.	XX.	XX.	XX.
Finish 2 Light head outside ring	12 white matt RAL 9003 62 (14) black matt 22 aluminium polished		Standard	XX.	12	XX.	XX.	XX.	XX.	XX.
				XX.	62	XX.	XX.	XX.	XX.	
				XX.	22	XX.	XX.	XX.	XX.	
Finish 3 Light head top cover		60 silver anodised 61 gold anodised 62 black anodised	Standard	XX.	XX.	60	XX.	XX.	XX.	XX.
				XX.	XX.	61	XX.	XX.	XX.	
				XX.	XX.	62	XX.	XX.	XX.	
LED CRI >92 SELV				XX.	XX.	XX.	27	XX.	XX.	XX.
				XX.	XX.	XX.	30	XX.	XX.	
				XX.	XX.	XX.	40	XX.	XX.	
Beam Angle	FLOOD	12,5 W 1282 ¹⁾ Lumen	Standard	XX.	XX.	XX.	XX.	99	00	00
				XX.	XX.	XX.	XX.	26	00	00
				XX.	XX.	XX.	XX.	34	00	00

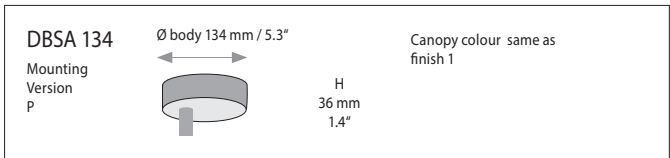

Order No. LIGHT HEAD FLOOD: **.. 00 00**

Order No. LIGHT HEAD SPOT: **.. 00 00**

Order No. Accessories (page 2): **... 00 00 00 ..**

Input voltage for power supply units is 220-240 VAC 50/60 Hz

Handcrafted in Germany, certified quality
 ETL Intertek
 Conforms to UL-STD 1598 Certified to CSA-STD C22.2 No.250.0-08
 IP 20
 Protective rating
 180° Tilttable
 360° Rotatable
 Light distribution direct
 Protection class I
 Luminaires are suitable for mounting on ordinary flammable materials, which have an inflammation point of at least 200° C. / 392° F.

Technical data is subject to change. Errors and omissions excepted 1) Net lumen output: Losses due to diffusors and reflectors are considered. Lumen values refer to an ambient temperature of max. 35° C / 95° F. 2) Weight of lights without remote technical unit or canopy.

AVVENI

ACCESSORIES

CASAMBI WALL SWITCH



CASAMBI wall-switch

white

207. 00. 00. 00. 11

CASAMBI wall-switch

black

207. 00. 00. 00. 10

Casambi wall-switch is a wireless user interface that can be configured via the Casambi app. The four target buttons can control a scene or an animation of the user's choice or simply one luminaire, one luminaire group or all lights together if so desired. Up to 4 groups may be separately programmed. It comes with a wall mounting plate. The switch can be attached to the plate as it is equipped with magnets.