




AVVENI TABLE



Product-information: Aluminium structure with one light head and metal stand. The light head can be taken off and is fully adjustable through a magnetic hinge system.

Design: Ulrich Sattler | Michael Schmidt, Code2design

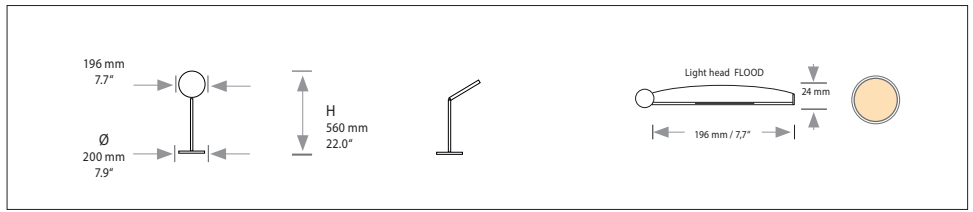

STRUCTURE

Type	H/Ø mm	H/Ø inches	LED Watt	weight kg ²⁾ / lbs ²⁾	Type No.	Finish 1	DIM	PowerSupply Cable	Mounting Version
	H 560 / Ø 200	H 22.0 / Ø 7.9"	12,5 W	2.0 / 4.4	1100.	XX.	XX.	XX.	XX.
Finish 1 Structure	12 white matt RAL 9003 14 black matt 22 aluminium polished	Standard	XXXX.	12	XX.	XX.	XX.	XX.	
Dimmer	Push button for dimming CASAMBI Head switch- and dimmable.	Standard	XXXX.	XX.	07	XX.	XX.	XX.	
Power Supply Cable	power supply cable, 2800 mm / 110"	80 PVC black	Standard	XXXX.	XX.	XX.	80	XX.	
Mounting Version	2500 mm / 98,4" pluggable on the lamp cord included country-specific plug	please tick your plug version, further versions on request. <input type="checkbox"/> EURO <input type="checkbox"/> UK	XXXX.	XX.	XX.	XX.	0N		

Order No. STRUCTURE

LIGHT HEAD

Type	Finish 2	Finish 3	LED Kelvin	Beam angle	Type No.	Finish 2	Finish 3	LED	Beam angle
Type	01	XX.	XX.	XX	XX.	XX.	XX.	XX	XX
Finish 2 Light head outside ring	12 white matt RAL 9003 62 (14) black matt 22 aluminium polished	Standard	XX.	12	XX.	XX.	XX	XX	XX
Finish 3 Light head top cover	60 silver anodised 61 gold anodised 62 black anodised	Standard	XX.	XX.	60	XX.	XX.	XX	XX
LED	Extra warm-white 2700 K Warm-white 3000 K Neutral-white 4000 K	Standard	XX.	XX.	XX.	27	XX.	XX	XX
Beam Angle	FLOOD 12,5 W 1282 ¹⁾ Lumen	Standard	XX.	XX.	XX.	XX.	99	00	00

Metal stand Ø 200 mm / 7.9"
 Colour:
 Finish 1, structure white (12) – Stand white (12)
 Finish 1, structure black (14) – Stand black (14)
 Finish 1, structure polished (22) – Stand black (14)

Order No. LIGHT HEAD FLOOD 00 00

Order No. Accessories (page 2) 00 00 00 ..

Input voltage for all external power supply units and canopies is 100-240 VAC 50-60Hz

Handcrafted in Germany, certified quality
 IP 20 Protective rating
 180° Tilttable
 360° Rotatable
 Light distribution direct
 Protection class III: only suitable for very low voltage supply (<50V)
 F

Technical data is subject to change. Errors and omissions excepted 1) Net lumen output: Losses due to diffusors and reflectors are considered. Lumen values refer to an ambient temperature of max. 35° C / 95° F. 2) Weight of lights without remote technical unit or canopy.

AVVENI

ACCESSORIES

CASAMBI WALL SWITCH



CASAMBI wall-switch

white

207. 00. 00. 00. 11

CASAMBI wall-switch

black

207. 00. 00. 00. 10

Casambi wall-switch is a wireless user interface that can be configured via the Casambi app. The four target buttons can control a scene or an animation of the user's choice or simply one luminaire, one luminaire group or all lights together if so desired. Up to 4 groups may be separately programmed. It comes with a wall mounting plate. The switch can be attached to the plate as it is equipped with magnets.