


# SATTLER

## BE2

Housing: Recessed downlight with aluminium frame  
 Design: SATTLER

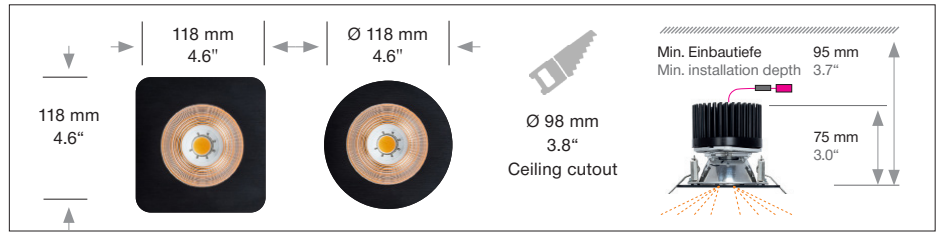

| Sizes  | Size: L x W / Ø mm  | Inches                               | LED Watt                          | Lumen <sup>1)</sup>    | Weight <sup>2)</sup> kg/lbs | Item No.   | LED   | Dimming | LED | Finish                   | Power supply cable | Mounting version |                             |
|--|---|--------------------------------------|-----------------------------------|------------------------|-----------------------------|------------|-------|---------|-----|--------------------------|--------------------|------------------|-----------------------------|
| <br>   | 118 x 118   | 4.6 x 4.6                            | 18°                               | 18                     | 2000                        | 0,4 / 0.88 | 1016. | xx.     | xx. | xx.                      | xx.                | xxx.             | x                           |
|  | 118 x 118   | 4.6 x 4.6                            | 30°                               | 18                     | 2000                        | 0,4 / 0.88 | 1017. | xx.     | xx. | xx.                      | xx.                | xxx.             | x                           |
|  | 118 x 118   | 4.6 x 4.6                            | 55°                               | 18                     | 2000                        | 0,4 / 0.88 | 1018. | xx.     | xx. | xx.                      | xx.                | xxx.             | x                           |
|  | Ø 118   | Ø 4.6                                | 18°                               | 18                     | 2000                        | 0,4 / 0.88 | 1510. | xx.     | xx. | xx.                      | xx.                | xxx.             | x                           |
|  | Ø 118   | Ø 4.6                                | 30°                               | 18                     | 2000                        | 0,4 / 0.88 | 1511. | xx.     | xx. | xx.                      | xx.                | xxx.             | x                           |
|  | Ø 118   | Ø 4.6                                | 55°                               | 18                     | 2000                        | 0,4 / 0.88 | 1512. | xx.     | xx. | xx.                      | xx.                | xxx.             | x                           |
| ideal for a ceiling thickness of 1-25 mm   |   |                                      |                                   |                        |                             |            |       |         |     |                          |                    |                  |                             |
| LED<br>CRI > 95  |   | Standard:                            | Neutral-white                     |                        | 4000 K                      |            | xxxx. | 40.     | xx. | xx.                      | xx.                | xxx.             | x                           |
|  |   | Optional:                            | Warm-white                        |                        | 3000 K                      |            | xxxx. | 30.     | xx. | xx.                      | xx.                | xxx.             | x                           |
|  |   |                                      | Extra warm-white                  |                        | 2700 K                      |            | xxxx. | 27.     | xx. | xx.                      | xx.                | xxx.             | x                           |
| Dimming  |   | Standard:                            | DALI, Switch Dim, 1-10 V          |                        |                             |            | xxxx. | xx.     | 61. | 00.                      | xx.                | xxx.             | x                           |
|  |   | Optional:                            | CASAMBI                           |                        |                             |            | xxxx. | xx.     | 81. | 00.                      | xx.                | xxx.             | x                           |
| Finishes   | <br>Standard: 12 white, similar RAL 9003  | <br>Optional: 10 black fine textured | Premium:<br>22 aluminium polished | <br>60 silver anodised | <br>62 black anodised       | xxxx.      | xx.   | xx.     | xx. | <input type="checkbox"/> | xxx.               | x                |                             |
|  |   |                                      |                                   |                        |                             |            |       |         |     |                          |                    |                  | <br>65 champ. gold anodised |
| Power supply   | included, downlight and power supply connected with plug for easy installation  |                                      |                                   |                        |                             |            |       |         |     |                          |                    |                  |                             |
| Option   | IP 44 upgrade 210.00.00.00.00   |                                      |                                   |                        |                             |            |       |         |     |                          |                    |                  |                             |
|  | Suitable for concrete mounting kit: (recommended) e.g. KAISER 1282-30 box KAISER 1281-07 cover  |                                      |                                   |                        |                             |            |       |         |     |                          |                    |                  |                             |
|  | For order quantities of more than 30 pieces, measures of the aluminium frame can be individually adjusted.  |                                      |                                   |                        |                             |            |       |         |     |                          |                    |                  |                             |
| Input voltage for all external power supply units and canopy is 220-240 VAC 50/60 Hz | Complete order number: <input type="text"/> <input type="text"/> <input type="text"/> <input type="text"/> 00. <input type="text"/> <input type="text"/> <input type="text"/> V |                                      |                                   |                        |                             |            |       |         |     |                          |                    |                  |                             |

