


## CIRCOLO INVERSE

Housing: Aluminium profile with opal diffuser on the outside  
Design: SATTLER



Sizes	Size: Ø x H x W mm	Inches	LED Watt	Lumen <sup>1)</sup>	Weight <sup>2)</sup> kg/lbs	Item No.	LED	Dimming	LED	Finishes	Power supply cable	Mounting version
	Ø 1320 x 160 x 70	51.9 x 6.3 x 2,7	75	6.402	13 / 28.6	265.	XX.	XX.	XX.	XX.	XXX.	X
	Ø 1600 x 160 x 70	62.9 x 6.3 x 2,7	93	7.789	16 / 35.3	266.	XX.	XX.	XX.	XX.	XXX.	X
	Ø 2300 x 160 x 70	90.5 x 6.3 x 2,7	136	11.372	25 / 55.1	267.	XX.	XX.	XX.	XX.	XXX.	X
	Ø 2600 x 160 x 70	102.3 x 6.3 x 2,7	156	13.270	40 / 88.1	268.	XX.	XX.	XX.	XX.	XXX.	X
LED	<p>Standard: Neutral-white 4000 K</p> <p>Optional: Warm-white 3000 K Extra warm-white 2700 K Tunable white* 2700 - 6500 K RGB colour control* RGB + Neutral-White* 4000 K</p> <p><small>* (only in combination with dimming DALI, CASAMBI) Combinations up to 3 stripes of LED possible</small></p>	<p>CRI &gt; 90 Mac Adam 3 SELV L80 B10 100.000 h</p>	XXX.	40.	XX.	XX.	XX.	XX.	XXX.	X		
			XXX.	30.	XX.	XX.	XX.	XX.	XXX.	X		
			XXX.	27.	XX.	XX.	XX.	XX.	XXX.	X		
			XXX.	80.	XX.	XX.	XX.	XXX.	X			
			XXX.	60.	XX.	00.	XX.	XXX.	X			
Dimming	<p>Standard: Without Dimmer</p> <p>Optional: 0 - 10 V DALI CASAMBI</p>	XXX.	XX.	01.	00.	XX.	XXX.	X				
		XXX.	XX.	51.	00.	XX.	XXX.	X				
		XXX.	XX.	61.	00.	XX.	XXX.	X				
Finish	<p>Standard: 12 white, powder coated, similar RAL 9003</p> <p>Optional (Powder coated):</p> <p>11 white, similar RAL 9010</p> <p>10 black fine textured</p> <p>30 anthracite fine textured</p> <p>32 crocodile black</p> <p>33 sand silver fine textured</p> <p>34 bronze satined</p> <p>35 gold</p> <p>36 brass</p> <p>37 bronze fine textured</p> <p>38 copper</p> <p>XX Custom finish</p>	XXX.	XX.	XX.	XX.	---	XXX.	X				
Power supply cable	<p>Standard: Z 70 Silver</p> <p>Optional: Z 71 white, Z 72 grey, Z 73 black, Z 74 orange, Z 75 red, Z 76 green, 000 Without power cable</p>	XXX.	XX.	XX.	XX.	XX.	---	X				

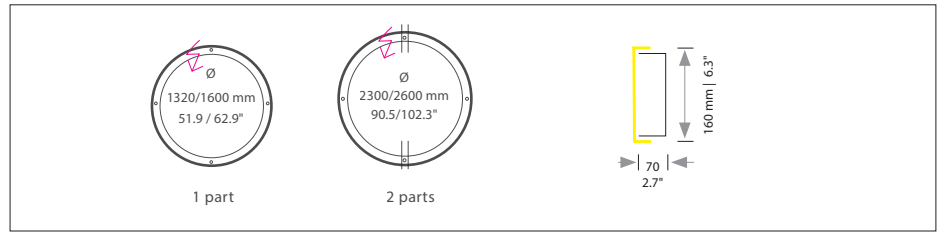

Handcrafted in Germany, certified quality



Conforms to UL-STD 1598 Certified to CSA-STD C22.2 No.250.0-08



Protective rating of luminaire



Light distribution outwards



Protection class III: only suitable for very low voltage supply (<50V)




Luminaires are suitable for mounting on ordinary flammable materials, which have an inflammation point of at least 200° C / 392° F

Technical data is subject to change. Errors and omissions excepted 1) Net lumen output: Losses due to diffusers and reflectors are considered. Lumen values refer to an ambient temperature of max. 35° C / 95° F. 2) Weight of lights without remote technical unit or canopy.

## CIRCOLO INVERSE

Housing: Aluminium profile with opal diffuser on the outside  
Design: SATTLER

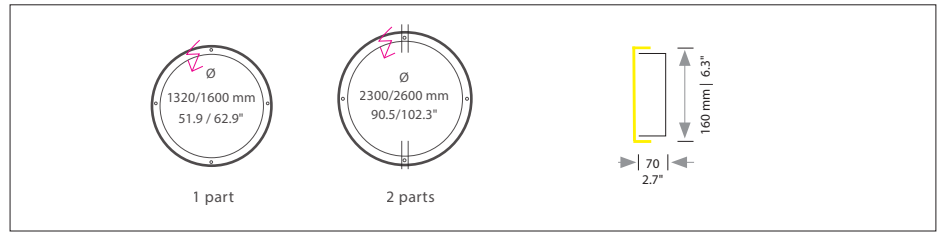

### Mounting Version

 <b>Standard</b> A	 B	 C	 E	 F	 S													
 T	 G	 H	 K	<table border="1"> <thead> <tr> <th>Item No.</th> <th>LED</th> <th>Dimming</th> <th>LED</th> <th>Finishes</th> <th>Power supply cable</th> <th>Mounting version</th> </tr> </thead> <tbody> <tr> <td>X X X.</td> <td>X X.</td> <td>X X.</td> <td>X X.</td> <td>X X.</td> <td>X X X</td> <td style="text-align: center;">-</td> </tr> </tbody> </table>	Item No.	LED	Dimming	LED	Finishes	Power supply cable	Mounting version	X X X.	X X.	X X.	X X.	X X.	X X X	-
Item No.	LED	Dimming	LED	Finishes	Power supply cable	Mounting version												
X X X.	X X.	X X.	X X.	X X.	X X X	-												

A, B, C, G, H, K = Distance of external power supply unit to light fixture max. 10m / 394".  
E, F, S, T, K = Minimum suspension height half the diameter of light fixture, maximum suspension height two times diameter of light fixture

Including steel cable suspension 5000mm/197"; Version F,R 3000mm/118";  
Version S,T 5000 + 3000mm / 197"+118" and/or power supply cable 5000mm/197"

Complete order number

---	---	---	---	---	---	---
-----	-----	-----	-----	-----	-----	-----

Power supply units: (1 LED Stripe)			
Type / Size mm / inch	For use with Mounting version	Protective rating	
DE 1F 363 x 143 x 56 14.2 x 5.6 x 2.2"	Ø 1320 / 29.5" Ø 1600 / 62.9"	A, C, G, K A, C, G	IP 20
DE 2F 363 x 283 x 56 14.2 x 11.1 x 2.2"	Ø 2300 / 90.5" Ø 2600 / 102.3"	A, G A, G	IP 20

Canopy: (1 LED Stripe)			
Type/ Size mm / inch	For use with Mounting version	Protective rating	
DB 290 Ø 290 / 260 / 60 mm / 11.4 x 10.2 / 2.3"	B, E, F, H (up to size Ø 1320)	IP 20	
DB 350 Ø 350 / 320 / 60 mm / 13.7 x 12.5 / 2.3"	B, H (up to size Ø 2600)	IP 20	
PB 375 Ø 90 H 375 mm / 3.5 x 14.8"	S, T	IP 20	

Colour: 12 white, similar RAL 9003, contact factory for other finishes  
USA/Canada: Canopy mounts to 4" octagonal junction box.

Input voltage for all external power supply units and canopy is 220-240 VAC 50-60 Hz


### Optional



CASAMBI wall-switch

207. 00. 00. 00. 12. (white)  
207. 00. 00. 00. 10 (black)

Casambi wall-switch is a wireless user interface that can be configured via the Casambi app. The four target buttons can control a scene or an animation of the user's choice or simply one luminaire, one luminaire group or all lights together if so desired. Up to 4 groups may be separately programmed. It comes with a wall mounting plate. The switch may be also used on its own as it is attached to the wall plate using magnets.



Power cable cover plate for mounting version A

200. 00. 00. 00. 12 (white)

Consisting of a cavity ceiling box with 80mm round metal cover. Applicable to mounting version A.

--	--	--	--	--	--