


EVOLUTION

SPOT M

Housing: Spotlight, solid aluminium housing, 330° hinge, 24° and 34°
 Design: Ulrich Sattler

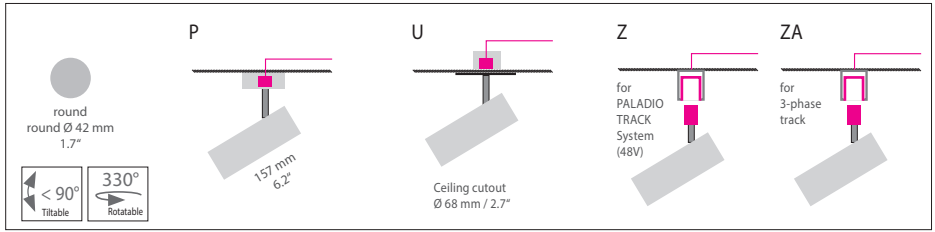

	Size: Ø / L mm	Inches	LED Watt	Lumen ¹⁾	Weight ²⁾ kg/lbs	Beam angle	Item No.	LED direct	Dimming	LED indirect	Finish	Power supply cable	Mounting version
Size	Ø 60 / L 157 mm	Ø 2.4 / L 6.2"	17	1587	0,5 / 1,1	24°	1789.	XX.	XX.	XX.	XX.	XX X.	XX
	Ø 60 / L 157 mm	Ø 2.4 / L 6.2"	17	1587	0,5 / 1,1	34°	1790.	XX.	XX.	XX.	XX.	XX X.	XX
LED		Standard: Warm-white		3000 K			XXXX.	30.	XX.	XX.	XX.	XXX.	XX
CRI > 90		Optional: Neutral-white		4000 K			XXXX.	40.	XX.	XX.	XX.	XXX.	XX
UGR<19		Extra warm-white		2700 K			XXXX.	27.	XX.	XX.	XX.	XXX.	XX
L80 B10 50.000 h													
SELV													
Dimming		Standard: TRIAC					XXXX.	XX.	11.	00.	XX.	XXX.	XX
		DALI					XXXX.	XX.	61.	00.	XX.	XXX.	XX
		Optional: DALI					XXXX.	XX.	61.	00.	XX.	XXX.	XX
		Casambi					XXXX.	XX.	81.	00.	XX.	XXX.	XX
Finish		Standard: 66 bronze anodised brushed					XXXX.	XX.	XX.	XX.	---	XXX.	XX
		Optional: 60 silver anodised brushed											
		62 black anodised brushed											
		65 champ. gold anodised brushed											
		12 white, powder coated, similar RAL 9003											
Mounting version		Standard: Direct ceiling mounting with power supply unit in canopy					XXXX.	XX.	XX.	XX.	XX.	XXX.	---
		Optional: U Cover Ø 80 mm / 3.1" Ceiling cutout 68 mm / 2.7" Power supply unit in cavity box											
		Z Mounting with adapter for 48V PALADIO TRACK System											
		ZA Mounting with adapter for 3-phase track											

Canopy:

Type	For use with Mounting version	Protective rating
 DA 80 Cover Ø 80mm / 3.1" Ceiling cutout 68 mm / 2.7" Power supply unit in cavity box same colour as luminaire	U	IP 40
 DB 120/40 Cover Ø 120mm / 4.7" H 40 mm / 1.6" same colour as luminaire	P	IP 40

Complete order number: ---. --. --. 00. ---. 000. --

Compatible TRIAC Dimmers

Manufacturer	Model	Quantity of parallel connection
JUNG	1224 LED UDE	14
JUNG	1731 DD	10
Merten	SBD200LED	13
ABB Busch-Jaeger	6519 U	15
ABB Busch-Jaeger	6526 U	13
Berker	296110	10
Berker	2973	12
Schneider	SBD200LED_ELG174231	13

Input voltage for all external power supply unit is 220-240 VAC 50/60 Hz

