
FINO

FLOOR



Housing: Aluminium structure with flexible light head and metal stand.

Design: Ulrich Sattler | Michael Schmidt, Code2design

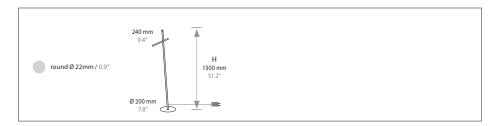

										Dimming		Finish	Power supply cable	Mounting version
Ø 22 / H 1300) mm	Ø 0.9 / H	51.2"	4	313	2,5 / 5.5		1537.	XX.	XX.	X X.	XX.	XXX.	Х
(ED)	Standard:	Warm-wh	nite		3000	K		xxx.	30.	X X.	x x.	XX.	XXX.	Х
0 900 Adam 3 Optional:			Neutral-white 4000 K Extra warm-white 2700 K					xxx. xxx.	40. 27.	x x. x x.	x x. x x.	x x. x x.	XXX. XXX.	X X
		Push butt	ton for dimi	ming				xxx.	x x.	07.	00.	x x.	xxx.	Х
66 bronze anodised brushed	Optional:	60 silver anodised brushed	62 black anodised brushed	65 champ. anodise brushed	gold d			xxx.	x x.	xx.	xx.		xxx.	х
Z 80 Black								xxx.	x x.	x x.	xx.	xx.	Z80.	Х
plug	ggable on the lamp	connection	on cable (bl	lack) wit		adapter	I	xxx.	X X.	xx.	X X.	xx.	XXX.	N
	bronze anodised brushed Z 80 Black	Optional: Optional: Optional: Z 80 Black	Optional: Neutral-w Extra war Push butt 66 bronze anodised brushed 7 80 Black Floor Ligit connection pluggable on the lamp included count	Optional: Neutral-white Extra warm-white Push button for dim Optional: 60 5ilver anodised brushed Floor Light including connection cable (b	Optional: Neutral-white Extra warm-white Push button for dimming Optional: 60 62 65 65 65 65 65 65 65 64 65 65 65 65 65 65 65 65 65 65 65 65 65	Optional: Neutral-white 4000 Extra warm-white 2700 Push button for dimming Optional: 60 62 65 champ. gold anodised brushed brushed brushed brushed brushed Floor Light including 1900mm/74" connection cable (black) with power pluggable on the lamp included country-specific plug	Optional: Neutral-white 4000 K Extra warm-white 2700 K Push button for dimming Push button for dimming Optional: 60 62 65 silver black champ.gold anodised brushed brushed brushed brushed brushed Floor Light including 1900mm/74" connection cable (black) with power adapter pluggable on the lamp included country-specific plug	Optional: Neutral-white 4000 K Extra warm-white 2700 K Push button for dimming Push button for dimming Optional: 60 62 65 65 champ. gold anodised brushed brushed brushed brushed Floor Light including 1900mm/74" connection cable (black) with power adapter pluggable on the lamp included country-specific plug	Optional: Neutral-white 4000 K	Optional: Neutral-white 4000 K	Optional: Neutral-white	Optional: Neutral-white 4000 K	Optional: Neutral-white 4000 K	Optional: Neutral-white 4000 K





Complete order number

Input voltage for all external power supply units and canopy is $\,220\text{-}240\,\text{VAC}\,50\text{-}60\,\text{Hz}$





Protective rating of luminaire



Direct light distribution





Luminaires are suitable for mounting on ordinary flammable materials, which have an inflammation point of at least 200° C./392° F.