


FINO PENDANT

Housing: Pendant light, solid aluminium housing
 Design: Ulrich Sattler | Michael Schmidt, Code2design

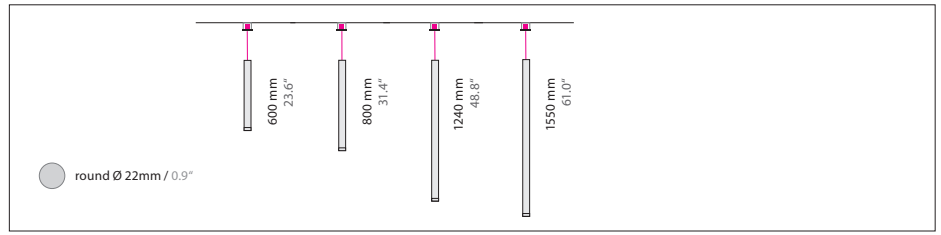

	Size: Ø / L mm	Inches	LED Watt	Lumen ¹⁾	Weight ²⁾ kg/lbs	Item No.	LED	Dimming	LED	Finish	Power supply cable	Mounting version
Sizes	Ø 22 / L 600 mm	Ø 0.9 / L 23.6"	4	365	0,4 / 0.8	1533.	xx.	xx.	xx.	xx.	xxx.	xx
	Ø 22 / L 800 mm	Ø 0.9 / L 31.4"	4	365	0,5 / 1.1	1534.	xx.	xx.	xx.	xx.	xxx.	xx
	Ø 22 / L 1240 mm	Ø 0.9 / L 48.8"	4	365	0,7 / 1.5	1535.	xx.	xx.	xx.	xx.	xxx.	xx
	Ø 22 / L 1550 mm	Ø 0.9 / L 61.0"	4	365	0,8 / 1.7	1536.	xx.	xx.	xx.	xx.	xxx.	xx
LED CRI > 90		Standard:	Warm-white	3000 K		xxxx.	30.	xx.	xx.	xx.	xxx.	xx
		Optional:	Neutral-white Extra warm-white	4000 K 2700 K		xxxx. xxxx.	40. 27.	xx. xx.	xx. xx.	xx. xx.	xxx. xxx.	xx xx
SELV												
Dimming		Standard:	TRIAC DALI			xxxx. xxxx.	xx. xx.	11. 61.	00. 00.	xx. xx.	xxx. xxx.	xx xx
		Optional:	DALI Casambi			xxxx. xxxx.	xx. xx.	61. 81.	00. 00.	xx. xx.	xxx. xxx.	xx xx
Finish		Standard:	66 bronze anodised brushed	Optional:	60 silver anodised brushed 62 black anodised brushed 65 champ. gold anodised brushed 22 aluminium polished	xxxx.	xx.	xx.	xx.	---	xxx.	xx
		Power supply cable		Z 80 Black matt		xxxx.	xx.	xx.	xx.	xx.	Z80.	xx
Mounting version		Standard:	F Suspension with canopy DB 78/32 and 1 power supply cable 2000 mm / 78.7"	Optional:	R Cover Ø 80 mm / 3.1" ceiling cutout 68 mm / 2.7" Power supply unit in cavity box U3 Cover Ø 50 mm / 2.0" ceiling cutout 35 mm / 1.4" Power supply unit in suspended ceiling <small>* mounting version U3 available from the 1st quarter of 2021</small>	xxxx.	xx.	xx.	xx.	xx.	xxx.	---

Canopy:		Type	For use with Mounting version	Protective rating
	DA 50	Cover Ø 50 mm / 2.0" Ceiling cutout 35 mm / 2.0" Power supply unit in suspended ceiling <small>3) an inspection flap is required for the power supply unit white (22 polished) Same colour as luminaire (60,62,65,66)</small>	U3	IP 40
	DA 80	Cover Ø 80 mm / 3.1" ceiling cutout 68 mm / 2.7" Power supply unit in cavity box white similar RAL 9003	R	IP 40
	DB 78/32	Cover Ø 78 mm / 3.0" H 32 mm / 1.2" white (22 polished) Same colour as luminaire (60,62,65,66)	F	IP 40

Complete order number: ---, --, --, 00, --, Z80, --

Compatible TRIAC Dimmers

Manufacturer	Model	Quantity of parallel connection
JUNG	1224 LED UDE	14
JUNG	1731 DD	10
Merten	SBD200LED	13
ABB Busch-Jaeger	6519 U	15
ABB Busch-Jaeger	6526 U	13
Berker	296110	10
Berker	2973	12
Schneider	SBD200LED ELG174231	13

Input voltage for all external power supply units and canopy is 220-240 VAC 50-60 Hz.

