


## FINO

### SPOT 2

Housing: Spotlight, solid aluminium housing, 330° hinge

Design: Ulrich Sattler

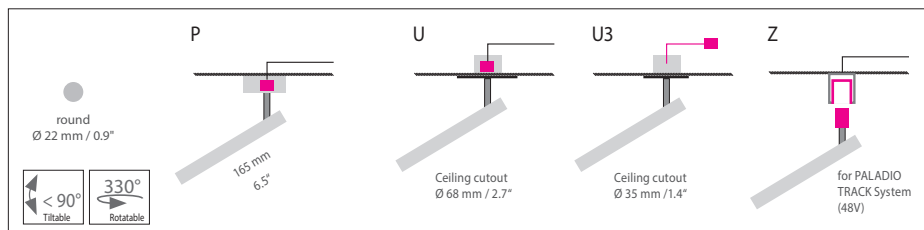

	Size: Ø / L mm	Inches	LED Watt	Lumen <sup>1)</sup>	Weight <sup>2)</sup> kg/lbs	Item No.	LED	Dimming	LED	Finish	Power supply cable	Mounting version
Size	Ø 22 / L 165 mm	Ø 0.9 / L 6.5"	4	365	0,4 / 0.88	1539.	XX.	XX.	XX.	XX.	XXX.	XX
LED		Standard: Warm-white	3000 K			XXXX.	30.	XX.	XX.	XX.	XXX.	XX
CRI > 90		Optional: Neutral-white	4000 K			XXXX.	40.	XX.	XX.	XX.	XXX.	XX
		Optional: Extra warm-white	2700 K			XXXX.	27.	XX.	XX.	XX.	XXX.	XX
SELV												
Dimming		Standard: TRIAC				XXXX.	XX.	11.	00.	XX.	XXX.	XX
		Optional: DALI				XXXX.	XX.	61.	00.	XX.	XXX.	XX
		Optional: DALI				XXXX.	XX.	61.	00.	XX.	XXX.	XX
		Optional: Casambi				XXXX.	XX.	81.	00.	XX.	XXX.	XX
Finish		Standard: 66 bronze anodised brushed				XXXX.	XX.	XX.	XX.	---	XXX.	XX
		Optional: 60 silver anodised brushed										
		Optional: 62 black anodised brushed										
		Optional: 65 champ. gold anodised brushed										
		Optional: 12 white, powder coated, similar RAL 9003										
Mounting version		Standard: Direct ceiling mounting with power supply unit in canopy				XXXX.	XX.	XX.	XX.	XX.	XXX.	---
		Optional: U Cover Ø 80 mm / 3.1" Ceiling cutout 68 mm / 2.7" Power supply unit in cavity box										
		Optional: U3 Cover Ø 50mm / 2.0" 3) Ceiling cutout 35 mm / 1.4" Power supply unit in suspended ceiling										
		*mounting version U3 available from the 1st quarter of 2021										

Canopy:	Type	For use with Mounting version	Protective rating
	DA 50	U3	IP 40
	Cover Ø 50mm / 2.0"		
	Ceiling cutout 35 mm / 1.4"		
	Power supply unit in suspended ceiling		
	Same colour as luminaire		
	3) an inspection flap is required for the power supply unit		
	DA 80	U	IP 40
	Cover Ø 80mm / 3.1"		
	Ceiling cutout 68mm / 2.7"		
	Power supply unit in cavity box		
	Same colour as luminaire		
	DB 78/32	P	IP 40
	Cover Ø 78 mm / 3.0"		
	H 32 mm / 1.2"		
	Same colour as luminaire		

Input voltage for all external power supply units and canopy is 220-240 VAC 50-60 Hz.

1539.	---	---	00.	---	000.	---
-------	-----	-----	-----	-----	------	-----

Complete order number

#### Compatible TRIAC Dimmers

Manufacturer	Model	Quantity of parallel connection
JUNG	1224 LED UDE	14
JUNG	1731 DD	10
Merten	SBD200LED	13
ABB Busch-Jaeger	6519 U	15
ABB Busch-Jaeger	6526 U	13
Berker	296110	10
Berker	2973	12
Schneider	SBD200LED ELG174231	13

