


Commercial use only
Nur gewerbliche Nutzung

Housing: Solid acrylic glass rod, with aluminium frame
Design: SATTLER

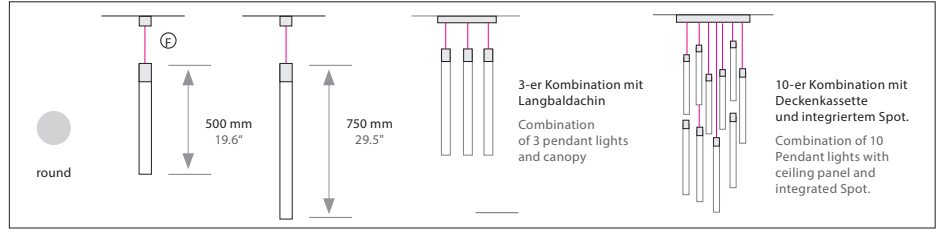

	Size: Ø / L mm	Inches	LED Watt	Lumen ¹⁾	Weight kg ²⁾ / lbs ²⁾	Item No.	LED	Dimming	LED	Finish	Power supply cable	Mounting version
FIO Single	Ø 40, L 500 mm	Ø 2 L 19.6"	6.8	625	2.0 / 4.4	965.	X X.	X X.	X X.	X X.	X X X.	X
	Ø 40, L 750 mm	Ø 2 L 29.5"	6.8	625	2.5 / 5.5	968.	X X.	X X.	X X.	X X.	X X X.	X
FIO Set of 3	Ø 40, L 500 mm	Ø 2 L 19.6"	20	1.875	4.0 / 8.8	966.	X X.	X X.	X X.	X X.	X X X.	X
	Ø 40, L 750 mm	Ø 2 L 29.5"	20	1.875	5.0 / 11.0	967.	X X.	X X.	X X.	X X.	X X X.	X
FIO Set of 10 (5 of each length)	Ø 40, L 500 mm	Ø 2 L 19.6"	68	6.250		969.	X X.	X X.	X X.	X X.	X X X.	X
	Ø 40, L 750 mm	Ø 2 L 29.5"	68	6.250								

acrylic glass rods only switchable and dimmable together

LED CRI > 90		Standard: Warm-white	3000 K	X X X.	30.	X X.	X X.	X X.	X X X.	X
		Optional: Neutral-white Extra warm-white	4000 K 2700 K	X X X. X X X.	40. 27.	X X. X X.	X X. X X.	X X. X X.	X X X. X X X.	X X

Dimming		Standard: TRIAC (F) DALI (FIO Set of 3+10)	X X X. X X X.	X X.	11. 61.	00. 00.	X X. X X.	X X X. X X X.	X X
		Optional: Casambi (Z) (for PALADIO TRACK)	X X X.	X X.	81.	00.	X X. X X X.	X	

Finish												
Standard:		Optional:										
	66 bronze anodised		60 silver anodised	62 black anodised	65 champ.gold anodised	X X X.	X X.	X X.	X X.	--.	X X X.	X

Power supply cable		Z 80 black	Mounting version (F) (Z) with power supply cable, length 2000mm / 78.7"	X X X.	X X.	X X.	X X.	X X.	Z80.	X
--------------------	--	---------------	--	--------	------	------	------	------	------	---

Canopy:

DB 78/32 Cover Ø 78 mm / 3.0"
H 32 mm / 1.2"
Same colour as luminaire (60,62,65,66)

DBL 390 L x W x H 392 x 70 x 70 mm / 15.4 2.7 x 2.7"

Panel L x W x H 500 x 500 77 mm / 19.7 x 19.7 3.0"

Colour: 12 white, similar RAL 9003, contact factory for other finishes

For use with Mounting version (F) Protective rating
single version IP 20
set of 3 IP 10
set of 10 IP 10

Complete order number
Compatible TRIAC Dimmers

Manufacturer	Model	Quantity of parallel connection
JUNG	1224 LED UDE	14
JUNG	1731 DD	10
Merten	SBD200LED	13
ABB Busch-Jaeger	6519 U	15
ABB Busch-Jaeger	6526 U	13
Berker	296110	10
Berker	2973	12
Schneider	SBD200LED ELG174231	13

Input voltage for all external power supply units and canopy is 220-240 VAC 50/60 Hz

--	--	--	--	--	--