



SATTLER

INSIEME

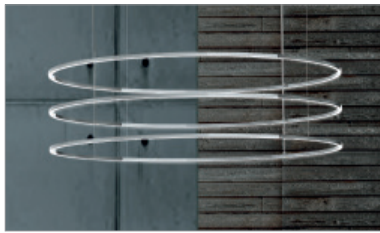


Housing: Pendant with light distribution up, out and down. 3 circular aluminium profiles, with integrated opal diffusers
 Design: MARKUS BISCHOF

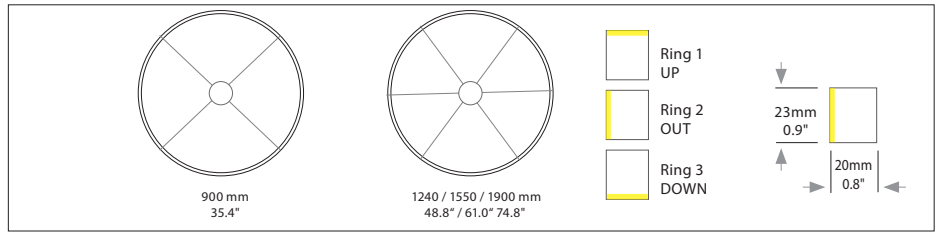


	Size: Ø mm	Inches	LED Watt	Lumen ¹⁾	Weight ²⁾ kg/lbs	Item No.	LED	Dimming	LED	Finish	Power supply cable	Mounting version
Sizes	Ø 900 mm	35.4"	114	6.726	5.0 / 11.0	764.	XX.	XX.	XX.	XX.	XXX.	X
	Ø 1240 mm	48.8"	148	8.732	7.0 / 15.4	765.	XX.	XX.	XX.	XX.	XXX.	X
	Ø 1550 mm	61.0"	188	11.092	9.0 / 19.8	766.	XX.	XX.	XX.	XX.	XXX.	X
	Ø 1900 mm	74.8"	228	13.452	11.0 / 24.2	767.	XX.	XX.	XX.	XX.	XXX.	X
LED		Standard: Warm-white	3000 K		XXX.	30.	XX.	XX.	XX.	XXX.	X	
		Optional: Neutral-white Extra warm-white	4000 K 2700 K		XXX. XXX.	40. 27.	XX. XX.	XX. XX.	XX. XX.	XXX. XXX.	X X	
Dimming		Standard: Without Dimmer			XXX.	XX.	01.	00.	XX.	XXX.	X	
		Optional: 0 - 10 V DALI CASAMBI			XXX. XXX. XXX.	XX. XX. XX.	51. 61. 81.	00. 00. 00.	XX. XX. XX.	XXX. XXX. XXX.	X X X	
Finish	Standard:		Optional (Powder coated):							Optional (Premium):	XX Custom finish	XXX. XX. XX. XX. XX.
			11 white, similar RAL 9010	10 black fine textured	30 anthracite fine textured	33 sand silver fine textured	34 bronze satined	35 gold				
Power supply cable		Without power cable			XXX.	XX.	XX.	XX.	XX.	XX.	000.	X

INSIEME

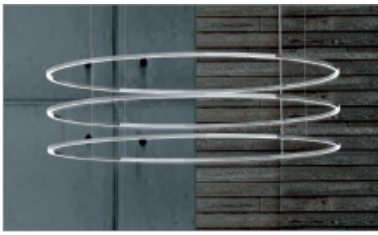


Housing: Pendant with light distribution up, out and down. 3 circular aluminium profiles, with integrated opal diffusers
Design: MARKUS BISCHOF

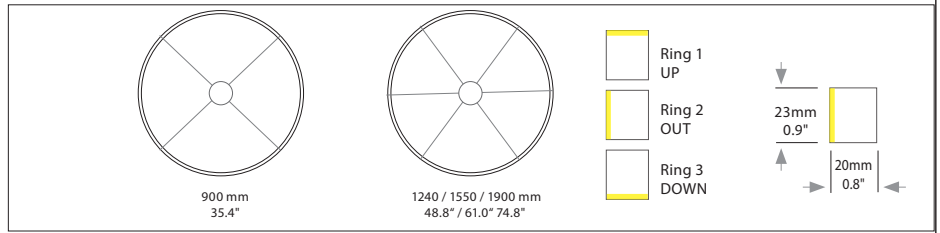


Mounting version

Standard:



Ø 900 mm / 35.4"
4 current-carrying steel cables with external power supply unit in canopy



Ø 1240-1900 mm / 48.8-74.8"
6 current-carrying steel cables canopy and external power supply unit in suspended ceiling

Item No.	LED	Dimming	LED	Finish	Power supply cable	Mounting version
X X X.	X X.	X X.	X X.	X X.	X X X	- .

J = Distance of external power supply unit to light fixture max. 10m / 394".

F = Power supply unit in canopy Max. suspension height approx. 2.0 times diameter of light.

Mounting version with 4 / 6 current-carrying steel cables 3000mm
Including power supply cable 5000mm / 197"



---	---	---	---	---	000	- .
-----	-----	-----	-----	-----	-----	-----

Complete order number

Power supply unit:	Type / Size mm / inch L x W x H	For use with Mounting version	Protective rating
	DE 2F (up to Ø 1550 mm) 363 x 283 x 56 mm 14.3 x 11.1 x 2.2"	J	IP 20
	DE 3F (Ø 1900 mm) 363 x 403 x 85 mm 14.3 x 15.7 x 3.3"	J	IP 20
+ Canopy as connection			
	DB 145 Ø 145 / 133 H 55 mm 5.7 x 5.2 H 2.2"	J	IP 20

Canopy:	Type/ Size mm / inch Ø cover plate / body / H	For use with Mounting version	Protective rating
	DB 350 Ø 350 / 320 / 60 mm / 13.7 x 12.6 / 2.4"	F	IP 20
Colour: 12 white, similar RAL 9003, contact factory for other finishes			
USA/Canada: Canopy mounts to 4" octagonal junction box.			

Input voltage for all external power supply units and canopy is 220-240 VAC 50-60 Hz

Optional:



CASAMBI wall-switch

207. 00. 00. 00. 12. (white)

207. 00. 00. 00. 10. (black)

Casambi wall-switch is a wireless user interface that can be configured via the Casambi app. The four target buttons can control a scene or an animation of the user's choice or simply one luminaire, one luminaire group or all lights together if so desired. Up to 4 groups may be separately programmed. It comes with a wall mounting plate. The switch may be also used on its own as it is attached to the wall plate using magnets.