


# SATTLER

## INSOSPESO FLOOR

Housing: Aluminium profile with integrated opal diffuser. Round lamp stand made of glass with satinised sides.  
 Design: JÜRGEN BECKERT

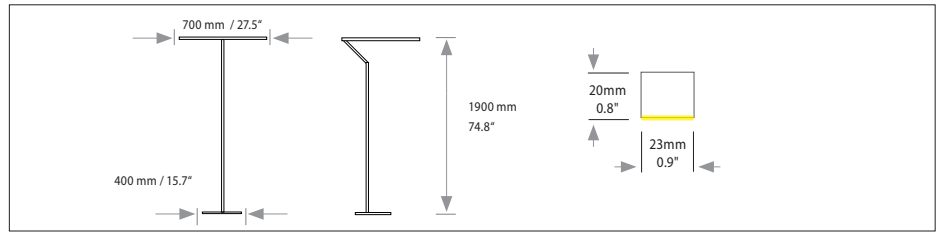


Size: Ø / H mm	Inches	LED Watt	Lumen <sup>1)</sup>	Weight <sup>2)</sup> kg/lbs	Item No.	LED	Dimming	LED	Finish	Power supply cable	Mounting version
Ø 700, H 1900 mm	Ø 27.5 H 74.8"	42	2.478	7 / 15.4	597.	X X.	X X.	X X.	X X.	X X X.	X

LED	Standard:	Warm-white	3000 K	X X X.	30.	X X.	X X.	X X.	X X X.	X
CRI > 90 Mac Adam 3 SELV L80 B10 100.000 h	Optional:	Neutral-white	4000 K	X X X.	40. 27.	X X.	X X.	X X.	X X X.	X
		Extra warm-white	2700 K	X X X.						

Dimming	Standard:	Push button for dimming	X X X.	X X.	07.	00.	X X.	X X X.	X
---------	-----------	-------------------------	--------	------	-----	-----	------	--------	---

Finish	Standard:	Optional (Powder coated):	Optional (Premium):	XX Custom finish	X X X.	X X.	X X.	X X.	X X X.	X		
	12 white, powder coated, similar RAL 9003	11 white, similar RAL 9010	10 black fine textured	30 anthracite fine textured	33 sand silver fine textured	34 bronze satined	35 gold	36 brass	37 bronze fine textured	38 copper	22 aluminium polished	

Power supply cable	Z 80 PVC cable black 2000 mm / 78"	2000mm / 78"	X X X.	X X.	X X.	X X.	X X.	Z80.	X
--------------------	------------------------------------	--------------	--------	------	------	------	------	------	---



Round lamp stand made of glass with satinised side.

597.	--.	07.	00.	--.	Z80.	N
------	-----	-----	-----	-----	------	---

Complete order number

Input voltage for all external power supply units and canopy is 220-240 VAC 50-60 Hz

Handcrafted in Germany, certified quality	Conforms to UL-STD 1598 Certified to CSA-STD C22.2 No.250.0-08	Protective rating of luminaire	Direct light distribution	Protection class III: only suitable for very low voltage supply (<50V)	Luminaires are suitable for mounting on ordinary flammable materials, which have an inflammation point of at least 200° C. / 392° F.
---	--	--------------------------------	---------------------------	--	--