


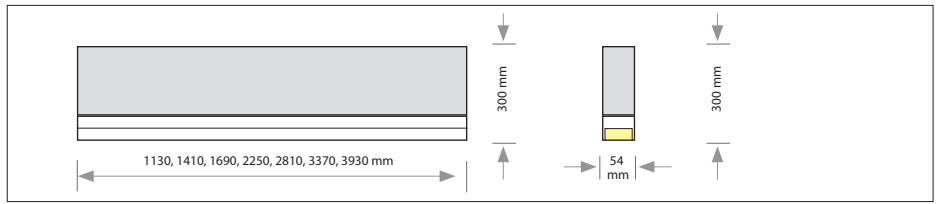






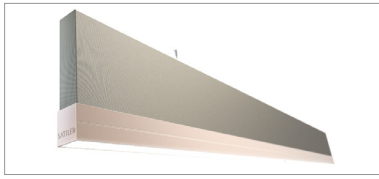














BAFFLE LIGHT PRISM

54

Housing: Acoustic baffle out of microfiber material with fabric or fleece cover or PET staple fibre with aluminium profile with integrated microprismatic diffuser and power supply.
 Design: Prof. Alexander Reichel, SATTLER



L x W x H mm	LED Watt	Lumen direct Microprismatic	Lumen / W	Weight ² kg without baffle	Item. No.	Mounting	Colour	LED Direkt Light colour Diffuser	Acoustic element Baffle Material	Dimming	Power supply cable			
BAFFLE														
1130 x 54 x 300	20	2.304	115	2,4	2070.	X X.	X X.	X X.	X X.	X X.	X X X.			
1410	25	2.880	115	3,0	2071.	X X.	X X.	X X.	X X.	X X.	X X X.			
1690	30	3.412	115	6,9	2076.	X X.	X X.	X X.	X X.	X X.	X X X.			
2250	40	4.608	115	4,7	2072.	X X.	X X.	X X.	X X.	X X.	X X X.			
2810	50	5.760	115	5,9	2073.	X X.	X X.	X X.	X X.	X X.	X X X.			
3370	60	6.912	115	7,0	2074.	X X.	X X.	X X.	X X.	X X.	X X X.			
3930	70	8.064	115	8,3	2075.	X X.	X X.	X X.	X X.	X X.	X X X.			
Mounting version						X X X X.	0A.	X X.	X X.	X X.	X X.	X X X.		
Finish Aluminium Profile						X X X X.	X X.	--.	X X.	X X.	X X.	X X X.		
LED direct		Standard: Neutral-white Optional: Warm-white Tunable white	4000 K 3000 K 2700 - 6500 K*			X X X X.	X X.	X X.	40. 30. 80.	X X.	X X.	X X.	X X.	X X X.
		DIFFUSER Standard: Microprism symmetrical, 65° beam angle				X X X X.	X X.	X X.	10.	X X.	X X.	X X.	X X X.	
Baffle fabric or fleece cover		Standard: V 1 Fleece white												
		Optional:												
														
Baffle PET staple fibre										02.	--.	X X.	X X X.	
						X X X X.	X X.	X X.	X X.	X X.	X X.	X X.	X X X.	
Dimming	Standard:	Dimmable to 1% via Dali-2, switch Dim					X X X X.	X X.	X X.	X X.	X X.	X X.	06.	X X X.
Power Supply Cable		Z91 PVC cable transparent, 1,5mm					X X X X.	X X.	X X.	X X.	X X.	X X.	X X.	Z91.

Accessoires see page 2

Quantity:

Order number:

 Handcrafted in Germany, Zertifizierte Qualität
  230V
  IP 20 Protective rating of luminaire
  Light distribution direct
  Protection class I
  Luminaires are suitable for mounting on ordinary flammable materials, which have an inflammation point of at least 200° C / 392° F

BAFFLE LIGHT PRISM

54

Housing:

Acoustic baffle out of microfiber material with fabric or fleece cover or PET staple fibre with aluminium profile with integrated microprismatic diffuser and power supply.


Design:

Prof. Alexander Reichel, SATTLER

Accessoires:

Connection box

Surface mounted connection box + support of steel cable suspension



L: 70 mm
B: 70 mm
H: 30 mm



12
white powder coated
RAL 9003



60
silver anodized



62
black
anodized



65
champ. gold
anodized



66
bronze
anodized

Item. No.

Quantity


2002.00.00.00.00.12	_____
2002.00.00.00.00.60	_____
2002.00.00.00.00.62	_____
2002.00.00.00.00.65	_____
2002.00.00.00.00.66	_____

Illumination:


L x W x H mm

Item. No.

Direct side with microprism- full surface illumination



1130 x 54 x 300 mm	2070.
1410	2071.
1690	2076.
2250	2072.
2810	2073.
3370	2074.
3930	2075.

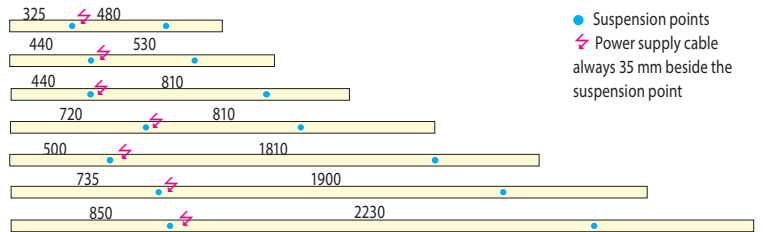

Input voltage 220 - 240 VAC 50/60 Hz, DC Level adjustable

Mounting versions:

OA Pendant luminaire

- Suspended with height adjustable steel cables (1500 mm)
- Power supply integrated in luminaire
- Position of suspension points can be repositioned on-site if necessary
- Connection box optional

