
PALITO

FLOOR



Housing: Curved aluminium housing with integrated lens reflector and metal stand.


Ulrich Sattler | Michael Schmidt, Code2design Design:

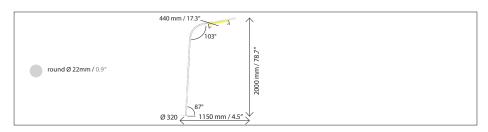

	Size: Ø / H mm	Inches LED Watt Lumen ¹⁾ Weight ²⁾ kg/lbs direct/indirect	Item No.	LED	Dimming	LED	Finish	Power supply cable	Mounting version
Sizes	Ø 22 / H 2006 mm	Ø 0.9 / H 78.9" 10/4 1385/180 5,0 / 11.0	1548.	XX.	XX.	XX.	XX.	XXX.	Х
LED	(LED) Standard:	Tunable white 2700-6500 K	XXX.	80.	X X.	80.	x x.	XXX.	Х
CRI > 90 UGR<17 Mac Adam 3 SELV L80 B10 70.000 h	54°								
Dimming	Standard:	Push button for dimming	XXX.	X X.	07.	x x.	x x.	XXX.	Х
Finish									
Standard:	66 Optional: bronze anodised brushed	62 65 black champ. gold anodised anodised brushed brushed	xxx.	x x.	XX.	x x.		XXX.	Х
Power supply cable									
	Z 80 PVC Black		xxx.	XX.	X X.	XX.	XX.	Z80.	Х
Mounting version	N pluggable on the la	Floor Light including 1900mm/74" connection cable (black) with power adapter mp included country-specific plug	xxx.	xx.	xx.	xx.	xx.	xxx.	N
	_								



Stand same colour as selected finish (60,65,66) black anodised (10 black fine textured)



Complete order number

Input voltage for all external power supply units and canopy is 220-240 VAC 50-60 Hz













Luminaires are suitable for mounting on ordinary flammable materials, which have an inflammation point of at least 200° C./392° F.