
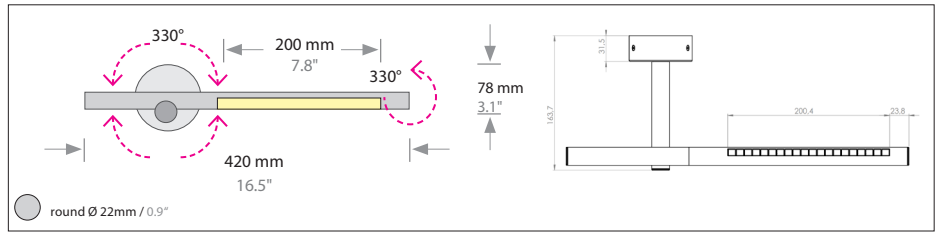


## PALITO WALL

Housing: Aluminium profile with integrated mini lens system, movable body  
 Design: Michael Schmidt, code2design

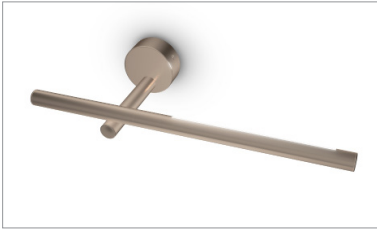

Sizes	Size: Ø x L mm	Inches	LED Watt	Lumen <sup>1)</sup>	Weight <sup>2)</sup> kg/lbs	Item No.	LED	Dimming	LED	Finish	Power supply cable	Mounting version
	Ø 22 x 420	0.9 x 16.5"	6,5	650	0,8	1544.	X X.	X X.	X X.	X X.	X X X.	X
LED UGR<17 CRI > 90 SELV		Standard:	Warm-white	3000 K		X X X X.	30.	X X.	00.	X X.	X X X.	X
		Optional:	Neutral-white	4000 K		X X X X.	40.	X X.	00.	X X.	X X X.	X
			Extra warm-white	2700 K		X X X X.	27.	X X.	00.	X X.	X X X.	X
Dimming		Standard:	TRIAC			X X X X.	X X.	11.	X X.	X X.	X X X.	X
Finish		Standard:	66 bronze anodised brushed	Optional:	60 silver anodised brushed	62 black anodised brushed	65 champ. gold anodised brushed				X X X.	X

Mounting version

Standard: Direct wall mounting with power supply unit in canopy

▶ 1544. --. 11. 00. --. 000. P  
 Complete order number

Canopy:

Type	For use with Mounting version	Protective rating
DB 78/32 Cover Ø 78 mm / 3.1" H 32 mm / 1.3" Same colour as luminaire	P	IP 40

Input voltage for canopy is 220-240 VAC 50/60 Hz

### Compatible TRIAC Dimmers

Manufacturer	Model	Quantity of parallel connection
JUNG	1224 LED UDE	14
JUNG	1731 DD	10
Merten	SBD200LED	13
ABB   Busch-Jaeger	6519 U	15
ABB   Busch-Jaeger	6526 U	13
Berker	296110	10
Berker	2973	12
Schneider	SBD200LED ELG174231	13

