
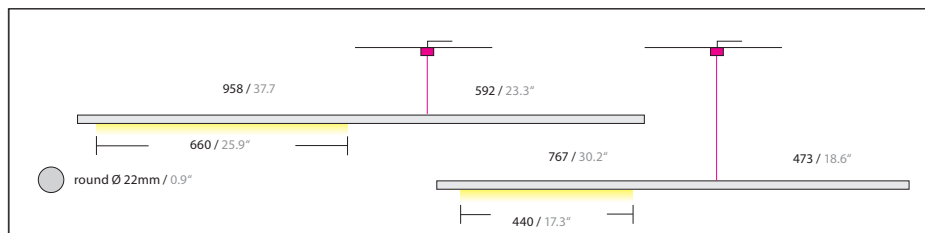


PALITO



Housing: Pendant light, solid aluminium housing
 Design: Ulrich Sattler | Michael Schmidt, Code2design

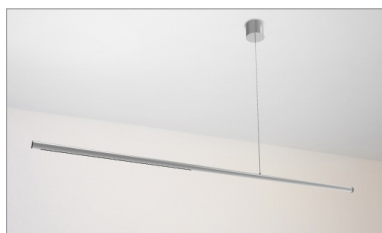

SIZE	Size: Ø / L mm	Inches	LED Watt	Lumen ¹⁾	Weight ²⁾ kg/lbs	Item No.	LED	Dimming	LED	Finish	Power supply cable	Mounting version	
	Ø 22 / L 1240 mm	Ø 0.9 / L 48.8"	10	1.385	1,4 / 3.1	1541.	x x x.	x x.	x x.	x x.	x x x.	x	
	Ø 22 / L 1550 mm	Ø 0.9 / L 61.0"	15	2.080	2,0 / 4,4	1542.	x x.	x x.	x x.	x x.	x x x.	x	
LED	Standard: Warm-white CRI > 90 *CRI > 80 UGR<17 	Standard: Warm-white Optional: Neutral-white Extra warm-white Tunable white *(only with gesture control)	3000 K 4000 K 2700 K 2700 - 6500 K*	x x x. x x x. x x x.	30. 40. 27. 80.	x x. x x. x x. x x.	x x. x x. x x. x x.	x x. x x. x x. x x.	x x x. x x x. x x x. x x x.	x x x x			
												x x x. x x x. x x x.	
													x x. x x. x x.
Dimming		Standard: Dimming via gesture control	x x x.	x x.	21.	00.	x x.	x x x.	x				
		Optional: DALI dimming	x x x.	x x.	61.	00.	x x.	x x x.	x				
Finish	Standard: 66 bronze anodised brushed Optional: 60 silver anodised brushed 62 black anodised brushed 65 champ. gold anodised brushed	x x x. x x. x x. x x.	x x. x x. x x. x x.	x x. x x. x x. x x.	x x x. x x x. x x x. x x x.	x x x x						
								Power supply cable	Z 80 Black x x x. x x. x x. x x.	x x. x x. x x. x x.	x x. x x. x x. x x.	x x. x x. x x. x x.	Z80. Z80. Z80. Z80.
Mounting version	F Height adjustable on canopy Suspension with canopy DB90 and 1 power supply cable 2000 mm / 78.7"	R Ceiling cutout Ø 68 mm / 2.7" Suspension with 1 power supply cable 2000 mm / 78.7" and cavity ceiling box, power supply in cavity ceiling box	Z* Adapter for PALADIO TRACK System (48V) *gesture control only Suspension with adapter for PALADIO TRACK System (48V) *gesture control only	x x x. x x. x x. x x.	x x. x x. x x. x x.	x x. x x. x x. x x.	x x. x x. x x. x x.	x x x. x x x. x x x.	. . .				
										Canopy: Type Size mm / inch DB 90/94 Mounting version F (Standard) Ø 90 / H 94 mm / 3.5 x 2.0" Colour black (10), white on request DA 80 Mounting version R, Ceiling cutout Ø 68 mm / 2.7" Cover Ø 80 mm 3.1", installation depth 80 mm / 3.1" Colour white (12), similar RAL 9003	00. 00. 00. 00.	Z80. Z80. Z80. Z80.	. . .

Canopy:
 Type Size mm / inch
 DB 90/94 Mounting version F (Standard)
 Ø 90 / H 94 mm / 3.5 x 2.0"
 Colour black (10), white on request
 DA 80 Mounting version R, Ceiling cutout Ø 68 mm / 2.7"
 Cover Ø 80 mm 3.1", installation depth 80 mm / 3.1"
 Colour white (12), similar RAL 9003

Input voltage for power supply units and canopy is 220-240 VAC 50/60 Hz.



Die Leuchte besitzt durch die asymmetrische Einzelpunktabhängung einen gewissen Bewegungsspielraum, welcher kurzzeitige Positionsänderungen von bis zu 15 – 20 Grad in horizontaler und vertikaler Richtung beinhalten kann. Auslöser hierfür können äußere Einflüsse, wie z.B. sehr starkem Luftzug und leichten Berührungen sein.

Due to the asymmetrical single point suspension, the luminaire has a desired freedom of movement which may include short-term rotation of the luminaire body by up to 15 - 20 degrees in horizontal and vertical direction caused by external influences such as strong draughts and light touches.

Leuchte lässt sich mittels Rändelschraube am verstellbaren Gegengewicht grob in die gewünschte Position bringen.
 Luminaire can be broadly adjusted to the desired position by means of a knurled screw with a counterweight.

