





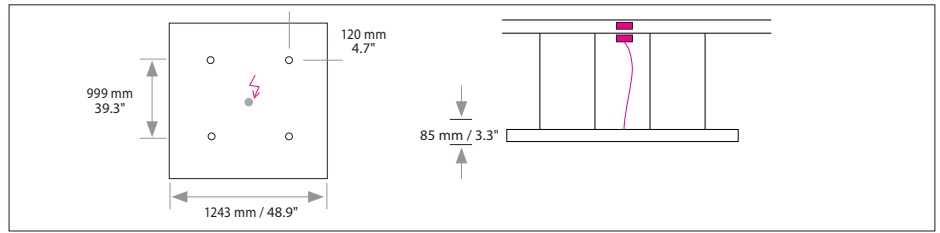

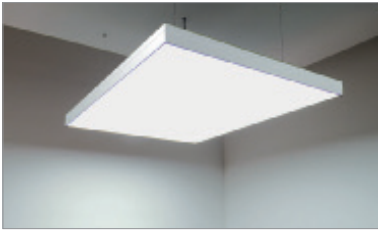

SKY

Housing: Aluminium profile frame, powder-coated in white with translucent foil (fire rating B1)
 Design: SATTLER



Sizes	Size: L x W x H mm	Inches	LED Watt	Lumen ¹⁾	Weight ²⁾ kg/lbs	Item No.	LED	Dimming	LED	Finishes	Power supply cable	Mounting version
	LED full area 1243 x 1243 x 85	48.9 x 48.9 x 3.3"	418	17.000	28 / 61.7	182.	x x.	x x.	x x.	x x.	x x x.	x
	LED circumferential 1243 x 1243 x 85	48.9 x 48.9 x 3.3"	90	4.500	28 / 61.7	183.	x x.	x x.	x x.	x x.	x x x.	x
LED 24V CRI > 90		Standard: Neutral-white		4000 K		x x x.	40.	x x.	x x.	x x.	x x x.	x
		Optional: Warm-white		3000 K		x x x.	30.	x x.	x x.	x x.	x x x.	x
		Optional: Extra warm-white		2700 K		x x x.	27.	x x.	x x.	x x.	x x x.	x
		Optional: Tunable white*		2700 - 6500 K		x x x.	80.	x x.	x x.	x x.	x x x.	x
* (only in combination with dimming DMX, DALI, CASAMBI) Combinations up to two stripes of LED possible												
Dimming		Standard: Without Dimmer				x x x.	x x.	01.	00.	x x.	x x x.	x
		Optional: 0 - 10 V				x x x.	x x.	51.	00.	x x.	x x x.	x
		Optional: DALI				x x x.	x x.	61.	00.	x x.	x x x.	x
Optional: CASAMBI					x x x.	x x.	81.	00.	x x.	x x x.	x	
Finish		12 white, powder coated, similar RAL 9003				x x x.	x x.	x x.	x x.	12.	x x x.	x
Power supply cable		Z 70 Silver				x x x.	x x.	x x.	x x.	x x.	Z70.	x



Handcrafted in Germany, certified quality



Conforms to UL-STD 1598 Certified to CSA-STD C22.2 No.250.0-08



Protective rating of luminaire



Direct light distribution





Protection class III: only suitable for very low voltage supply (<50V)




Luminaires are suitable for mounting on ordinary flammable materials, which have an inflammation point of at least 200°C / 392°F

SKY


Housing: Aluminium profile frame, powder-coated in white with translucent foil (fire rating B1)
 Design: SATTLER

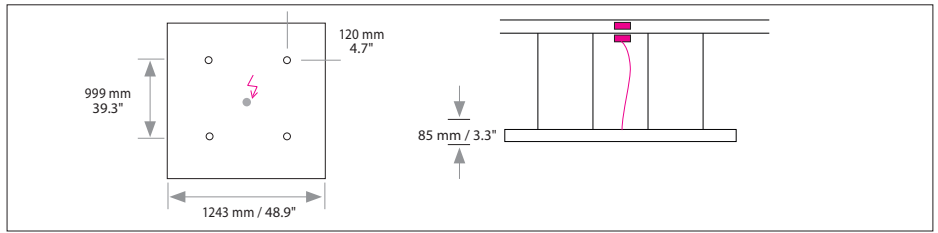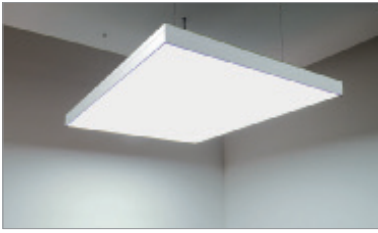

Mounting Version



4 point suspension with canopy in suspended ceiling



4 point suspension with canopy

B = Distance of external power supply unit to light fixture max. 10m / 394".

Including steel cable suspension 5000mm / 197" and power supply cable 5000mm / 197"

	Canopy:		
	Type/ Size mm / inch Ø body / H	For use with Mounting version	Protective rating
	DBS 300 Ø 300 / 50mm / 11.8 / 1.9"	B	IP 20
Colour: 12 white, similar RAL 9003, contact factory for other finishes			
USA/Canada: Canopy mounts to 4" octagonal junction box.			

Item No.	LED	Dimming	LED	Finishes	Power supply cable	Mounting version
---	---	---	---	12.	Z70	B

Complete order number

Input voltage for all external power supply units and canopy is 90-277 VAC 47-63 Hz


Optional



CASAMBI wall-switch

207. 00. 00. 00. 12. (white)
 207. 00. 00. 00. 10 (black)

Casambi wall-switch is a wireless user interface that can be configured via the Casambi app. The four target buttons can control a scene or an animation of the user's choice or simply one luminaire, one luminaire group or all lights together if so desired. Up to 4 groups may be separately programmed. It comes with a wall mounting plate. The switch may be also used on its own as it is attached to the wall plate using magnets.



Technical data is subject to change. Errors and omissions excepted 1) Net lumen output: Losses due to diffusers and reflectors are considered. Lumen values refer to an ambient temperature of max. 35° C / 95° F. 2) Weight of lights without remote technical unit or canopy.