
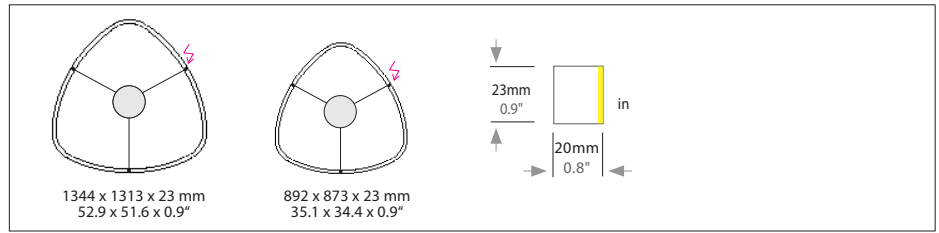



# SLIM DELTA IN

# SATTLER

Housing: Aluminium profile with integrated opal diffuser  
Design: SATTLER




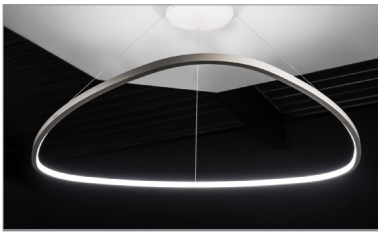


	Size: L x W x H mm	Inches	LED Watt	Lumen <sup>1)</sup>	Weight <sup>2)</sup> kg/lbs	Item No.	LED	Dimming	LED	Finish	Power supply cable	Mounting version
Sizes	1344 x 1313 x 23	52.9 x 51.6 x 0.9"	75	3.480	5.5 / 12.1	1576.	X X.	X X.	X X.	X X.	X X X.	X
	892 x 873 x 23	35.1 x 34.4 x 0.9"	50	2.300	2,8 / 6.1	1578.	X X.	X X.	X X.	X X.	X X X.	X
LED	 CRI > 90 Mac Adam 3 SELV L80 B10 100.000 h	Standard:	Warm-white	3000 K		X X X.	30.	X X.	X X.	X X.	X X X.	X
		Optional:	Neutral-white	4000 K		X X X.	40.	X X.	X X.	X X.	X X X.	X
		Extra warm-white	2700 K		X X X.	27.	X X.	X X.	X X.	X X X.	X	
		Tunable white*	2700 - 6500 K		X X X.	80.	X X.	X X.	X X.	X X X.	X	
*only in combination with Dali and Casambi dimming												
Dimming		Standard:	Without Dimmer			X X X.	X X.	01.	00.	X X.	X X X.	X
		Optional:	0 - 10 V			X X X.	X X.	51.	00.	X X.	X X X.	X
		DALI			X X X.	X X.	61.	00.	X X.	X X X.	X	
CASAMBI			X X X.	X X.	81.	00.	X X.	X X X.	X			
Finish	Standard:  12 white, powder coated, similar RAL 9003 Optional (Powder coated):	11 white, similar RAL 9010	10 black fine textured	30 anthracite fine textured	33 sand silver fine textured	34 bronze satined						
		35 gold	36 brass	37 bronze fine textured	38 copper							
		22 aluminium polished	27 brush-finished aluminium									
		XX Custom finish										
Power supply cable	Standard:  000 Without power cable Optional: Current-carrying F, R, T, K	Z 70 Silver	Z 71 white	Z 72 grey	Z 73 black							
		Z 74 orange	Z 75 red	Z 76 green								



## SLIM DELTA IN

Housing: Aluminium profile with integrated opal diffuser  
Design: SATTLER

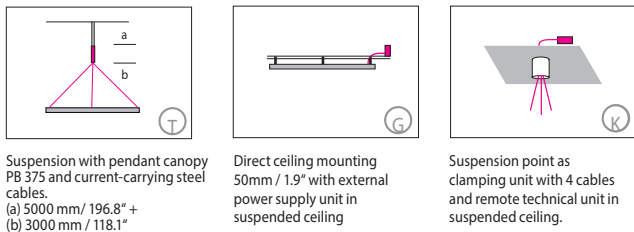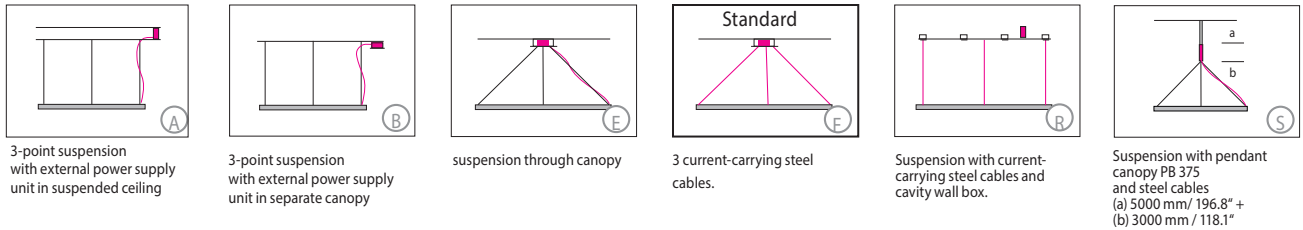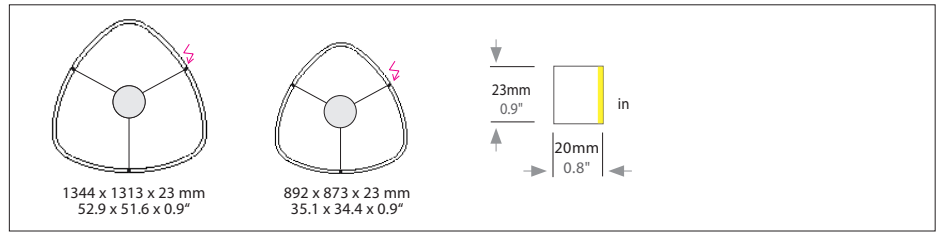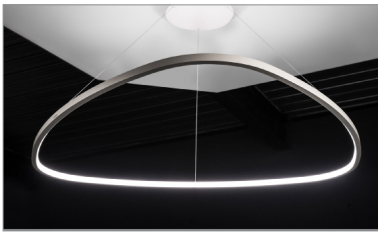

Item No.	LED	Dimming	LED	Finish	Power supply cable	Mounting version
X X X.	X X.	X X.	X X.	X X.	X X X	-

---	---	---	---	---	---	---
-----	-----	-----	-----	-----	-----	-----

Complete order number

A, B, G, R, K = Distance of external power supply unit to light fixture max. 10m / 394".  
S, T, K, E, F = Minimum suspension height 670 mm, 450 mm / 26.3", 17.7"

Including steel cable suspension Version F,R 3000mm/118" version S,T 5000 + 3000mm / 197"+118" and/or power supply cable 5000mm/197"

Power supply unit:		For use with	Protective rating
Type / Size mm / inch	L x W x H	Mounting version	
DE 1F	363 x 143 x 56 mm / 14.2 x 5.6 x 2.2"	A, G, R, K	IP 20

Input voltage for all external power supply units and canopy is 220-240 VAC 50-60 Hz

Canopy:		For use with	Protective rating
Type / Size mm / inch	Ø cover plate / body / H	Mounting version	
DB 230	Ø 230 / 210 / 60 mm / 9.5 / 8.3 / 2.3"	B, E, F (892x873 mm)	IP 20
DB 290	Ø 290 / 260 / 60 mm / 11.4 x 10.2 / 2.3"	B, E, F (1344x1313 mm)	IP 20
PB 375	Ø 90 H 375 mm / 3.5 x 14.8"	S, T	IP 20

Colour: 12 white, similar RAL 9003, contact factory for other finishes  
USA/Canada: Canopy mounts to 4" octagonal junction box.


Ø body 90 mm / 3.5"



### CASAMBI wall-switch

207. 00. 00. 00. 12. (white)  
207. 00. 00. 00. 10. (black)

Casambi wall-switch is a wireless user interface that can be configured via the Casambi app. The four target buttons can control a scene or an animation of the user's choice or simply one luminaire, one luminaire group or all lights together if so desired. Up to 4 groups may be separately programmed. It comes with a wall mounting plate. The switch may be also used on its own as it is attached to the wall plate using magnets.



### Power cable cover plate for mounting version A

200. 00. 00. 00. 12. (white)

Consisting of a cavity ceiling box with 80mm round metal cover. Applicable to mounting version A.



Handcrafted in Germany, certified quality



Conforms to UL-STD 1598 Certified to CSA-STD C22.2 No.250.0-08



IP 50 Protective rating of luminaire



Light distribution Inwards



Protection class III: only suitable for very low voltage supply (<50V)



Luminaires are suitable for mounting on ordinary flammable materials, which have an inflammation point of at least 200° C. / 392° F.