



SLIM ELLIPSE DIRECT

Housing: Aluminium profile with integrated opal diffuser
Design: SATTLER

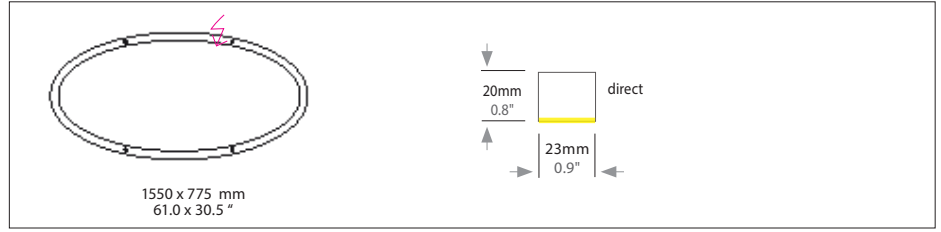


Size: L x W x H mm	Inches	LED Watt	Lumen ¹⁾	Weight ²⁾ kg/lbs	Item No.	LED	Dimming	LED	Finish	Power supply cable	Mounting version	
1550 x 775 x 20	61.0 x 30.5 x 0.8	70	4.130	6 / 13.2	738.	X X.	X X.	X X.	X X.	X X X.	X	
LED CRI > 90 Mac Adam 3 SELV L80 B10 100.000 h		Standard: Warm-white	3000 K	X X X.	30.	X X.	X X.	X X.	X X X.	X		
		Optional: Neutral-white	4000 K	X X X.	40.	X X.	X X.	X X.	X X X.	X		
		Optional: Extra warm-white	2700 K	X X X.	27.	X X.	X X.	X X.	X X X.	X		
		RGB colour control* *only in combination with dimming DALI, CASAMBI		X X X.	60.	X X.	00.	X X.	X X X.	X		
Dimming 	Standard: Without Dimmer	X X X.	X X.	01.	00.	X X.	X X X.	X				
	Optional: 0-10 DALI	X X X.	X X.	51.	00.	X X.	X X X.	X				
	Optional: CASAMBI	X X X.	X X.	81.	00.	X X.	X X X.	X				
Finish Standard:	12 white, powder coated, similar RAL 9003	11 white, similar RAL 9010	10 black fine textured	30 anthracite fine textured	33 sand silver fine textured	34 bronze satined						
	Optional (Powder coated):	35 gold	36 brass	37 bronze fine textured	38 copper							
	Optional (Premium):	22 aluminium polished	27 brush-finished aluminium	66 bronze anodised brushed	65 champ. gold anodised brushed	XX Custom finish	X X X.	X X.	X X.	X X.	--	X X X.
Power supply cable Standard:	Without power cable 000 Current-carrying F, R, T, K	Z 70 Silver	Z 71 white	Z 72 grey	Z 73 black							
	Optional:	Z 74 orange	Z 75 red	Z 76 green								
							X X X.	X X.	X X.	X X.	X X.	--



SLIM ELLIPSE DIRECT

Housing: Elliptical aluminium profile with integrated opal diffuser
Design: SATTLER

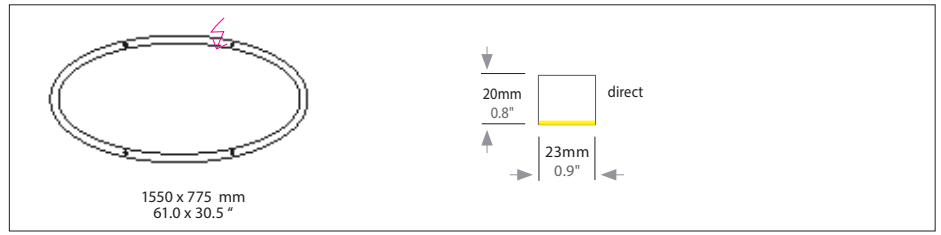

Mounting version

 A	 B	 E	 F	 R	 S
 T	 G	 K			

Item No.	LED	Dimming	LED	Finish	Power supply cable	Mounting version
X X X.	X X.	X X.	X X.	X X.	X X X	.

Complete order number

---	---	---	---	---	---	---
-----	-----	-----	-----	-----	-----	-----

A, B, G, R, K = Distance of external power supply unit to light fixture max. 10m / 394".
S, T, K, E, F = Minimum suspension height half the diameter of light fixture, maximum suspension height two times diameter of light fixture
Including steel cable suspension Version F,R 3000mm/118" version S,T 5000 + 3000mm / 197"+118" and/or power supply cable 5000mm/197"

Power supply unit:		For use with	Protective rating
Type / Size mm / inch	L x W x H	Mounting version	
DE 1F	363 x 143 x 56 mm / 14.2 x 5.6 x 2.2"	A,G,R,K	IP 20

Canopy:		For use with	Protective rating
Type / Size mm / inch	Ø cover plate / body / H	Mounting version	
DB 290	Ø 290 / 260 / 60 mm / 11.4 x 10.2 / 2.3"	B, E, F	IP 20
PB 375	Ø 90 H 375 mm / 3.5 x 14.8"	S, T	IP 20

Colour: 12 white, similar RAL 9003, contact factory for other finishes
USA/Canada: Canopy mounts to 4" octagonal junction box.


Input voltage for all external power supply units and canopy is 220-240 VAC 50-60 Hz

Optional



CASAMBI wall-switch
207. 00. 00. 00. 12. (white)
207. 00. 00. 00. 10. (black)

Casambi wall-switch is a wireless user interface that can be configured via the Casambi app. The four target buttons can control a scene or an animation of the user's choice or simply one luminaire, one luminaire group or all lights together if so desired. Up to 4 groups may be separately programmed. It comes with a wall mounting plate. The switch may be also used on its own as it is attached to the wall plate using magnets.



Power cable cover plate for mounting version A, G
200. 00. 00. 00. 12. (white)
Consisting of a cavity ceiling box with 80mm round metal cover. Applicable to mounting version A., G.

--	--	--	--	--	--