



## SLIM TABLE

Housing: Aluminium profile with integrated opal diffuser  
 Design: MARKUS BISCHOF

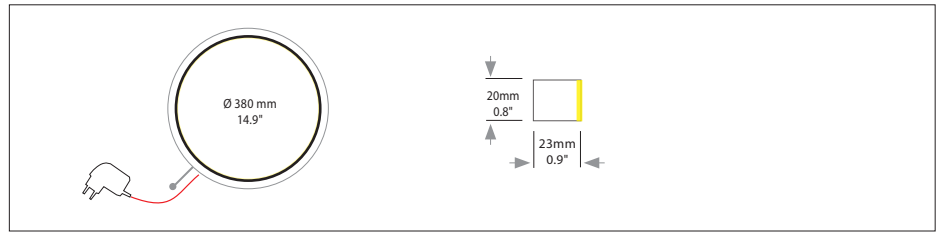

| Size: Ø mm         | Inches   | LED Watt | Lumen <sup>1)</sup> | Weight <sup>2)</sup> kg/lbs | Item No. | LED    | Dimming | LED    | Finish | Power supply cable | Mounting version |    |
|--------------------|--|----------|---------------------|-----------------------------|----------|--------|---------|--------|--------|--------------------|------------------|----|
| Size               | Ø 380 mm   | 14       | 897                 | 1.0 / 2.2                   | 737.     | X X.   | X X.    | X X.   | X X.   | X X X.             |                  |    |
| LED                | Standard: Warm-white<br>Optional: Neutral-white<br>Extra warm-white  | 3000 K   | X X X.              | 30.                         | X X.     | X X.   | X X.    | X X X. | X.     |                    |                  |    |
|                    |  | 4000 K   | X X X.              | 40.                         | X X.     | X X.   | X X.    | X X X. | X.     |                    |                  |    |
|                    |  | 2700 K   | X X X.              | 27.                         | X X.     | X X.   | X X.    | X X X. | X.     |                    |                  |    |
| Dimming            | Standard: Touchdimmer  |          | X X X.              | X X.                        | 21.      | 00.    | X X.    | X X X. | X.     |                    |                  |    |
| Finish             | Standard: 12 white, powder coated, similar RAL 9003<br>Optional (Powder coated): 11 white, similar RAL 9010, 10 black fine textured, 30 anthracite fine textured, 33 sand silver fine textured, 34 bronze satined, 35 gold, 36 brass, 37 bronze fine textured, 38 copper<br>Optional (Premium): 22 aluminium polished, 27* brush-finished aluminium, *27 Ring brush-finished Foot of the light 22 aluminium polished, XX Custom finish |          |                     |                             |          |        |         |        |        |                    |                  |    |
|                    |  |          | X X X.              | X X.                        | X X.     | X X.   | X X.    | X X X. | X.     |                    |                  |    |
| Power supply cable | Standard: Z 80 PVC cable black 1900mm/74" for all optional finishes  |          |                     |                             |          | X X X. | X X.    | X X.   | X X.   | X X.               | Z 80.            | X. |

### Mounting version



includes country-specific plug



Table lamp including 1900mm/74" connection cable (black) with power adapter  
 Input voltage for all external power supply units and canopy is 220-240 VAC 50-60 Hz



|      |     |     |     |     |       |   |
|------|-----|-----|-----|-----|-------|---|
| 737. | --- | 21. | 00. | --- | Z 80. | L |
|------|-----|-----|-----|-----|-------|---|

Complete order number



Handcrafted in Germany, certified quality



Conforms to UL-STD 1598 Certified to CSA-STD C22.2 No.250.0-08



Protective rating of luminaire



Light distribution inwards



Protection class III: only suitable for very low voltage supply (<50V)



Luminaires are suitable for mounting on ordinary flammable materials, which have an inflammation point of at least 200° C. / 392° F.