



SLIM WALL

Housing: Aluminium profile with integrated opal diffuser
 Design: SATTLER

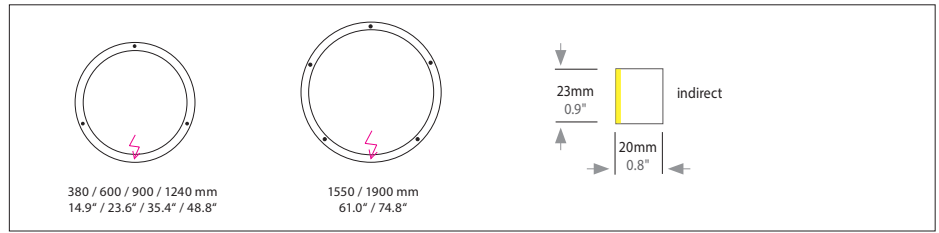

	Size: Ø mm	Inches	LED Watt	Lumen ¹⁾	Weight ²⁾ kg/lbs	Item No.	LED	Dimming	LED	Finish	Power supply cable	Mounting version
Sizes	Ø 380 mm	14.9"	9	505	1.0 / 2.2	727.	x x.	x x.	x x.	x x.	x x x.	x x
	Ø 600 mm	23.6"	13	875	1.0 / 2.2	728.	x x.	x x.	x x.	x x.	x x x.	x x
	Ø 900 mm	35.4"	22	1.276	1.5 / 3.3	729.	x x.	x x.	x x.	x x.	x x x.	x x
	Ø 1240 mm	48.8"	28	1.620	2.5 / 5.5	730.	x x.	x x.	x x.	x x.	x x x.	x x
	Ø 1550 mm	61.0"	37	2.109	3.0 / 6.6	731.	x x.	x x.	x x.	x x.	x x x.	x x
	Ø 1900 mm	74.8"	43	2.537	3.5 / 7.7	732.	x x.	x x.	x x.	x x.	x x x.	x x
LED		Standard:	Warm-white	3000 K		x x x.	30.	x x.	x x.	x x.	x x x.	x x
		Optional:	Neutral-white Extra warm-white	4000 K 2700 K		x x x. x x x.	40. 27.	x x. x x.	x x. x x.	x x. x x.	x x x. x x x.	x x x x
Dimming		Standard:	Without Dimmer			x x x.	x x.	01.	00.	x x.	x x x.	x x
		Optional:	0 - 10 V			x x x.	x x.	51.	00.	x x.	x x x.	x W
			DALI CASAMBI			x x x. x x x.	x x. x x.	61. 81.	00. 00.	x x. x x.	x x x. x x x.	x W x W
Finish		Standard:	12	11	10	30	33	34	Optional (Premium):	22	27	XX
			white, powder coated, similar RAL 9003	white, similar RAL 9010	black fine textured	anthracite fine textured	sand silver fine textured	bronze satined				
			Optional (Powder coated):	35	36	37	38					
				gold	brass	bronze fine textured	copper					
Power supply cable		Standard	Mountingversion W	Mountingversion L								
			Z 80 black matt	Z 90 PVC cable black								

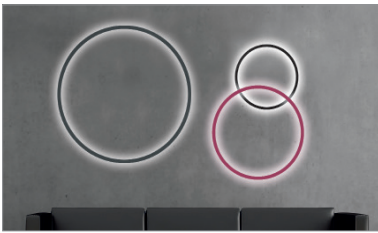

Handcrafted in Germany, certified quality



Conforms to UL-STD 1598 Certified to CSA-STD C22.2 No.250.0-08



Protective rating of luminaire



Indirect light distribution





Protection class III: only suitable for very low voltage supply (<50V)



Luminaires are suitable for mounting on ordinary flammable materials, which have an inflammation point of at least 200° C. / 392° F.

SLIM WALL

Housing: Aluminium profile with integrated opal diffuser
 Design: SATTLER

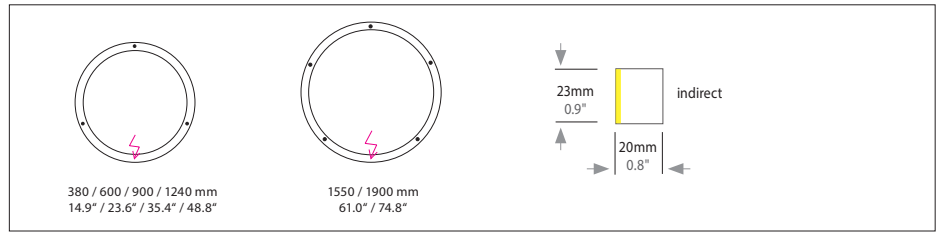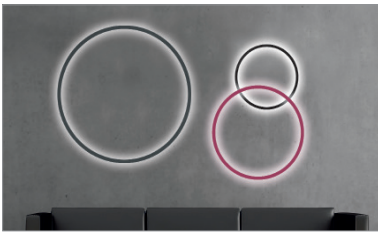

Mounting version	Diagram	Standard / Optional	Item No.	LED	Dimming	LED	Finish	Power supply cable	Mounting version
Ⓚ Wall bracket 85 mm / 3.3" (white)		Standard	X X X.	X X.	X X.	X X.	X X.	X X X.	K X
Ⓝ Wall bracket 115 mm / 4.5" (white)		Optional	X X X.	X X.	X X.	X X.	X X.	X X X.	J X
Ⓞ Remote power supply for intermediate wall		Standard	X X X.	X X.	X X.	X X.	X X.	X X X.	X W
Ⓛ Plugged on the light, cable including country-specific plug		Optional	X X X.	X X.	X X.	X X.	X X.	X X X.	X L

Wall brackets in white. Upon request in aluminium polished.

---	---	---	---	---	---	---	---	---	---
-----	-----	-----	-----	-----	-----	-----	-----	-----	-----

Complete order number

Type / Size mm / inch L x W x H	For use with Mounting version	Protective rating
DE 1F 363 x 143 x 56 mm / 14.2 x 5.6 x 2.2"	W	IP 20

Input voltage for all external power supply units and canopy is 220-240 VAC 50-60 Hz

Optional



CASAMBI wall-switch

207. 00. 00. 00. 12. (white)

207. 00. 00. 00. 10 (black)

Casambi wall-switch is a wireless user interface that can be configured via the Casambi app. The four target buttons can control a scene or an animation of the user's choice or simply one luminaire, one luminaire group or all lights together if so desired. Up to 4 groups may be separately programmed. It comes with a wall mounting plate. The switch may be also used on its own as it is attached to the wall plate using magnets.



Handcrafted in Germany, certified quality



Conforms to UL-STD 1598 Certified to CSA-STD C22.2 No.250.0-08



Protective rating of luminaire



Indirect light distribution



Protection class III: only suitable for very low voltage supply (<50V)



Luminaires are suitable for mounting on ordinary flammable materials, which have an inflammation point of at least 200° C. / 392° F.