


SATTLER

TIA

Housing: Pendant light, solid aluminium housing
Design: SATTLER

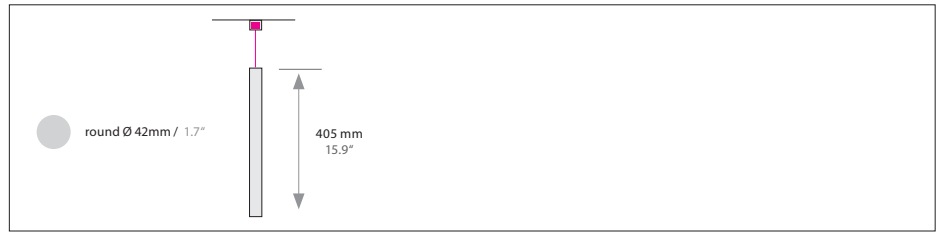

	Size: Ø / L mm	Inches	LED Watt	Lumen ¹⁾	Weight kg ²⁾ / lbs ²⁾	Beam angle	Item No.	LED	Dimming	LED	Finish	Power supply cable	Mounting version																											
TIA Single	Ø 42, L 405 mm	Ø 1.7 L 15.9"	6,3	625	1 / 2.2	24°	975.	x x.	x x.	x x.	x x.	x x x.	x																											
LED CRI > 90 L80 B10 50.000 h SELV	Standard:		Warm-white	3000 K	x x x.	30.	x x.	x x.	x x.	x x x.	x																													
	Optional:		Neutral-white Extra warm-white	4000 K 2700 K	x x x. x x x.	40. 27.	x x. x x.	x x. x x.	x x. x x.	x x x. x x x.	x																													
Dimming	Standard:		TRIAC DALI	(F) (Z)	x x x. x x x.	x x. x x.	11. 61.	00. 00.	x x. x x.	x x x. x x x.	F Z																													
	Optional:		Casambi	(Z)	x x x.	x x.	81.	00.	x x.	x x x.	Z																													
Finish	Standard: 66 bronze anodised		Optional: 60 silver anodised		62 black anodised	65 champ. gold anodised	22 aluminium polished	x x x.	x x.	x x.	x x.	---	x x x.	x																										
Power supply cable	Standard: Z 80 Black matt		x x x.										x x.	x x.	x x.	x x.	Z80.	x																						
Mounting version	(F) Suspension with canopy DB78/32 and 1 power supply cable 2000 mm / 78.7"		(Z) Mounting with adapter for 48V DALI PALADIO TRACK System																																					
<p>Canopy: DB 78/32 Cover Ø 78 mm / 3.0" H 32 mm / 1.2" same colour as luminaire (60,62,65,66) white 12 (Z2 polished)</p> <p>For use with Mounting version F (single version) Protective rating IP 20</p>							<p>Complete order number: ---, ---, ---, 00, ---, Z80, _</p> <p>Compatible TRIAC Dimmers</p> <table border="1"> <thead> <tr> <th>Manufacturer</th> <th>Model</th> <th>Quantity of parallel connection</th> </tr> </thead> <tbody> <tr><td>JUNG</td><td>1224 LED UDE</td><td>14</td></tr> <tr><td>JUNG</td><td>1731 DD</td><td>10</td></tr> <tr><td>Merten</td><td>SBD200LED</td><td>13</td></tr> <tr><td>ABB Busch-Jaeger</td><td>6519 U</td><td>15</td></tr> <tr><td>ABB Busch-Jaeger</td><td>6526 U</td><td>13</td></tr> <tr><td>Berker</td><td>296110</td><td>10</td></tr> <tr><td>Berker</td><td>2973</td><td>12</td></tr> <tr><td>Schneider</td><td>SBD200LED ELG174231</td><td>13</td></tr> </tbody> </table>							Manufacturer	Model	Quantity of parallel connection	JUNG	1224 LED UDE	14	JUNG	1731 DD	10	Merten	SBD200LED	13	ABB Busch-Jaeger	6519 U	15	ABB Busch-Jaeger	6526 U	13	Berker	296110	10	Berker	2973	12	Schneider	SBD200LED ELG174231	13
Manufacturer	Model	Quantity of parallel connection																																						
JUNG	1224 LED UDE	14																																						
JUNG	1731 DD	10																																						
Merten	SBD200LED	13																																						
ABB Busch-Jaeger	6519 U	15																																						
ABB Busch-Jaeger	6526 U	13																																						
Berker	296110	10																																						
Berker	2973	12																																						
Schneider	SBD200LED ELG174231	13																																						
Input voltage for all external power supply units and canopy is 220-240 VAC 50-60 Hz																																								