
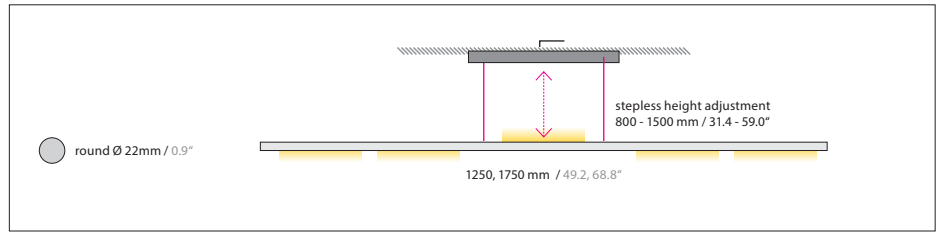


PALITO LINEA


Housing: Pendant light, solid aluminium housing
 Design: Ulrich Sattler | Michael Schmidt, Code2design

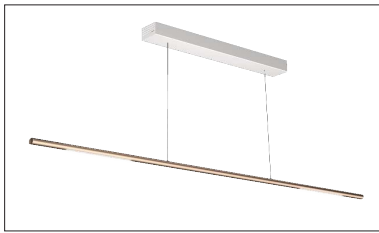


	Size: Ø / L mm	Inches	LED Watt direct / indirect	Lumen ¹⁾ direct / indirect	Weight ²⁾ kg / lbs	Item No.	LED	Dimming	LED	Finish	Power supply cable	Mounting version
SIZE	Ø 22 / L 1250 mm	Ø 0.9 / L 49.2"	10 / 5	1.260 / 630	1,4	1545.	x x x.	x x.	x x.	x x.	x x x.	x
	Ø 22 / L 1750 mm	Ø 0.9 / L 68.8"	20 / 5	2.520 / 630	1,4	1546.	x x.	x x.	x x.	x x.	x x x.	x
LED												
CRI > 90 *CRI > 80 UGR < 17		Standard: Warm-white		3000 K		x x x.	30.	x x.	30.	x x.	x x x.	x
		Optional: Neutral-white		4000 K		x x x.	40.	x x.	40.	x x.	x x x.	x
		Extra warm-white		2700 K		x x x.	27.	x x.	27.	x x.	x x x.	x
		Tunable white		2700 - 6500 K*		x x x.	80.	x x.	80.	x x.	x x x.	x
		*(only with gesture control)										
Dimming		Standard: TRIAC				x x x.	x x.	11.	x x.	x x.	x x x.	x
		Optional: DALI				x x x.	x x.	61.	x x.	x x.	x x x.	x
		Dimming via gesture control				x x x.	x x.	21.	x x.	x x.	x x x.	x
Finish		Standard: 66 bronze anodised brushed	Optional: 60 silver anodised brushed	62 black anodised brushed	65 champ. gold anodised brushed	x x x.	x x.	x x.	x x.	..	x x x.	x
Power supply cable		000 current carrying suspension cables				x x x.	x x.	x x.	x x.	x x.	000.	x
Mounting version		Canopy: Type DBH 542	Size mm / inch	Mounting version Y	542 x 68 x 53 mm / 21.3 x 2.7 x 2.1"	x x x.	x x.	x x.	x x.	x x.	x x x.	Y
Standard:		Canopy with stepless height adjustment and current carrying suspension cables		Colour white (12), similar RAL 9003								

Input voltage for all external power supply units and canopy is 220-240 VAC 50/60 Hz.

1250 indirect / direct

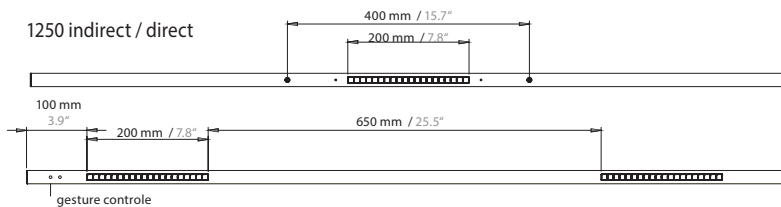

1750 indirect / direct

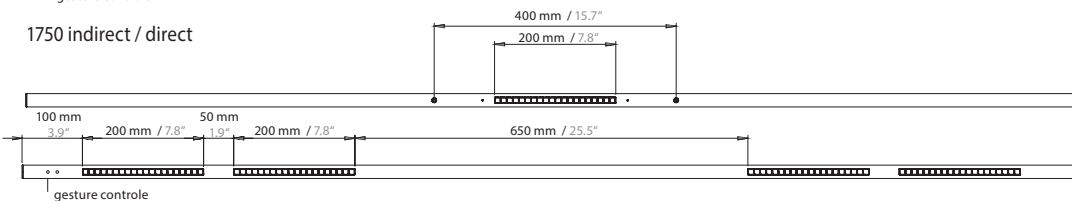

---	---	---	---	---	000.	Y
-----	-----	-----	-----	-----	-------------	----------

Complete order number

