





PALITO WALL

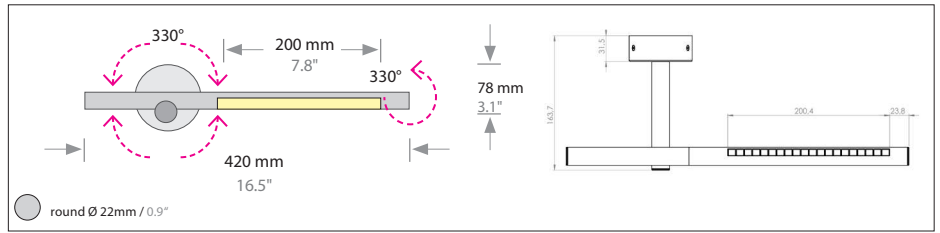

Housing: Aluminium profile with integrated mini lens system, movable body
 Design: Michael Schmidt, code2design

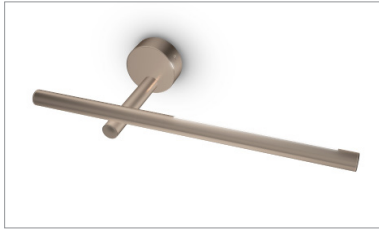


Sizes	Size: Ø x L mm	Inches	LED Watt	Lumen ¹⁾	Weight ²⁾ kg/lbs	Item No.	LED	Dimming	LED	Finish	Power supply cable	Mounting version
	Ø 22 x 420	0.9 x 16.5"	6,5	650	0,8	1544.	X X.	X X.	X X.	X X.	X X X.	X

LED UGR<17 CRI > 90 SELV		Standard: Warm-white	3000 K	X X X X.	30.	X X.	00.	X X.	X X X.	X
		Optional: Neutral-white	4000 K	X X X X.	40.	X X.	00.	X X.	X X X.	X
		Optional: Extra warm-white	2700 K	X X X X.	27.	X X.	00.	X X.	X X X.	X

Dimming		Standard: TRIAC	X X X X.	X X.	11.	X X.	X X.	X X X.	X
---------	---	-----------------	----------	------	-----	------	------	--------	---

Finish	Standard:	Optional:	66 bronze anodised brushed	60 silver anodised brushed	62 black anodised brushed	65 champ. gold anodised brushed	X X X.	X X.	X X.	X X.	..	X X X.	X
													

Mounting version

Standard:  Direct wall mounting with power supply unit in canopy

▶ 1544. --. 11. 00. --. 000. P
 Complete order number

Canopy:

Type	For use with Mounting version	Protective rating
DB 78/32 Cover Ø 78 mm / 3.1" H 32 mm / 1.3" Same colour as luminaire	P	IP 40

Input voltage for canopy is 220-240 VAC 50/60 Hz

Compatible TRIAC Dimmers

Manufacturer	Model	Quantity of parallel connection
JUNG	1224 LED UDE	14
JUNG	1731 DD	10
Merten	SBD200LED	13
ABB Busch-Jaeger	6519 U	15
ABB Busch-Jaeger	6526 U	13
Berker	296110	10
Berker	2973	12
Schneider	SBD200LED ELG174231	13

