






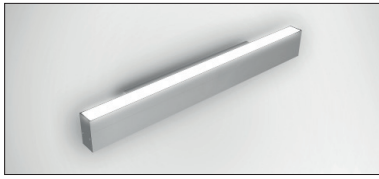

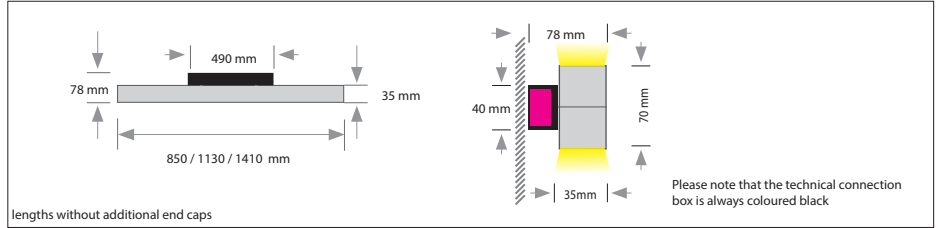


PALADIO WALL

DIRECT / INDIRECT



Housing: Aluminium profile with integrated microprismatic diffuser and power supply
Design: SATTLER



	L* x W x H mm	Wattage direct / indirect	Lumen direct / indirect	Lumen / W direct / indirect	Weight ² kg	Item No.	Mounting version	Finish	LED direct	LED indirect	Dimming	Power supply cable
Single luminaire	850 x 35 x 70	15 / 15	1.560 / 1.440	106 / 98	3,2	2300.	X X.	X X.	X X.	X X.	X X.	X X X.
	1130	20 / 20	2.080 / 1.920	106 / 98	3,8	2301.	X X.	X X.	X X.	X X.	X X.	X X X.
	1410	25 / 25	2.600 / 2.400	106 / 98	4,5	2302.	X X.	X X.	X X.	X X.	X X.	X X X.
*additional 3mm per end cap												
Microprism - full surface illumination (direct/indirect)												
												
lengths without additional end caps												
Mounting version						X X X X.	OP.	X X.	X X.	X X.	X X.	X X X.
Wall mounting												
Finish		Optional				X X X X.	X X.	--.	X X.	X X.	X X.	X X X.
Standard	66 bronze anodised		60 silver anodised	62 black anodised	65 champ. gold anodised							
LED direct		LED	Standard:	Neutral-white	4000 K	X X X X.	X X.	X X.	40.	X X.	X X.	X X X.
				Extra Warm-white	2700 K	X X X X.	X X.	X X.	27.	X X.	X X.	X X X.
				Warm-white	3000 K	X X X X.	X X.	X X.	30.	X X.	X X.	X X X.
				Tunable white	2700 - 6500 K	X X X X.	X X.	X X.	80.	X X.	X X.	X X X.
				*Tunable white also necessary for direct side, only in combination with DALI dimming								
SELV		DIFFUSER	Standard:	Microprism symmetrical, 65° beam angle			X X X X.	X X.	X X.	10.	X X.	X X X.
LED indirect		LED	Standard:	Neutral-white	4000 K	X X X X.	X X.	X X.	X X.	40.	X X.	X X X.
				Extra Warm-white	2700 K	X X X X.	X X.	X X.	X X.	27.	X X.	X X X.
				Warm-white	3000 K	X X X X.	X X.	X X.	X X.	30.	X X.	X X X.
				Tunable white	2700 - 6500 K*	X X X X.	X X.	X X.	X X.	80.	X X.	X X X.
				*Tunable white also necessary for direct side, only in combination with DALI dimming								
SELV		DIFFUSOR	Standard:	Microprism symmetrical 65° beam angle			X X X X.	X X.	X X.	X X.	10.	X X X.
Dimming		Standard:	Dimmable TRIAC			X X X X.	X X.	X X.	X X.	X X.	11.	X X X.
		Optional:	Dimmable to 1% via DALI-2, switch Dim			X X X X.	X X.	X X.	X X.	X X.	06.	X X X.
			*Casambi			X X X X.	X X.	X X.	X X.	X X.	08.	X X X.
			Direct and indirect light only controllable together									
			*available Q3/2022									
			Input voltage 220-240 VAC 50/60 Hz									

Pieces:

Complete order



---	OP.	--.	--.	10.	---	10.	--.	000.
-----	------------	-----	-----	------------	-----	------------	-----	-------------

