


### PALADIO LENS 35

Housing: Aluminium profile with integrated mini lens reflector and power supply  
 Design: SATTLER

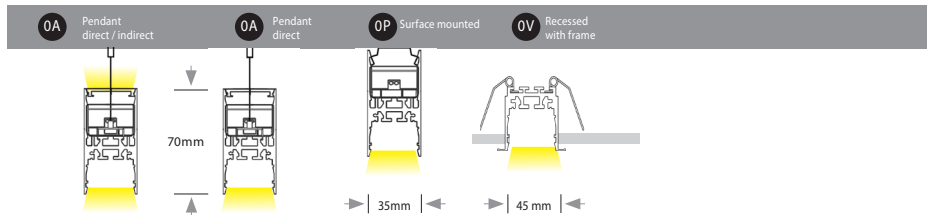

L* x W x H mm	Wattage direct / indirect	Lumen direct / indirect	Lumen / W direct / indirect	Weight kg	Item No.	Mounting version	Colour	LED direct		LED indirect		Dimming	Power supply cable				
<b>System luminaire</b>																	
1130 x 35 x 70	15 / -	1.872 / -	125 / -	2,4	2280.	X X.	X X.	X X.	X X.	X X.	X X.	X X.	X X X.				
2250	30 / 30	3.744 / 2.480	125 / 83	7,3	2282.	X X.	X X.	X X.	X X.	X X.	X X.	X X.	X X X.				
3370	45 / 45	5.620 / 4.960	125 / 83	11,3	2284.	X X.	X X.	X X.	X X.	X X.	X X.	X X.	X X X.				
End caps, power supply cables and PALADIO CONNECT 2 elements to be ordered separately, see page 2																	
1410	23 / 15	2.808 / 1.240	125 / 83	3,9	2281.	X X.	X X.	X X.	X X.	X X.	X X.	X X.	X X X.				
2810	45 / 30	5.620 / 2.480	125 / 83	9,3	2283.	X X.	X X.	X X.	X X.	X X.	X X.	X X.	X X X.				
For a systematic light distribution see page 2 for length of light elements *additional 3mm per end cap Separate specification sheet for single luminaires																	
<b>Mounting version</b>						 Pendant			 Surface mounted			 Recessed with frame					
						X X X X.	---	X X.	X X.	X X.	X X.	X X.	X X.				
<b>Finish</b>						 66 bronze anodised			 60 silver anodised			 62 black anodised			 65 champ. gold anodised		
Standard						X X X X.	X X.	---	X X.	X X.	X X.	X X.	X X.				
<b>LED direct</b>						 LED Standard: Neutral-white 4000 K Optional: Extra Warm-white 2700 K, Warm-white 3000 K, Tunable white 2700 - 6500 K, No direct light (blank element)			 SELV Standard: Mini lens reflector 60°   UGR < 19								
CRI > 90 MacAdam 3   L 80   B10   50.000 h Efficiency 80%						X X X X.	X X.	X X.	40.	X X.	X X.	X X.	X X.				
						X X X X.	X X.	X X.	27.	X X.	X X.	X X.	X X.				
						X X X X.	X X.	X X.	30.	X X.	X X.	X X.	X X.				
						X X X X.	X X.	X X.	80.	X X.	X X.	X X.	X X.				
						X X X X.	X X.	X X.	00.	X X.	X X.	X X.	X X.				
<b>LED indirect</b>						 LED Standard: No indirect light output Optional: Neutral-white 4000 K, Extra Warm-white 2700 K, Warm-white 3000 K, Tunable white 2700 - 6500 K* *Tunable white also necessary for direct side			 SELV Standard: Opal diffuser								
Only available for mounting version 0A. Indirect light not continuous, see page 2 CRI > 90 MacAdam 3   L 80   B10   50.000 h						X X X X.	X X.	X X.	X X.	X X.	00.	00.	X X.				
						X X X X.	X X.	X X.	X X.	X X.	40.	X X.	X X.				
						X X X X.	X X.	X X.	X X.	X X.	27.	X X.	X X.				
						X X X X.	X X.	X X.	X X.	X X.	30.	X X.	X X.				
						X X X X.	X X.	X X.	X X.	X X.	80.	X X.	X X.				
						X X X X.	X X.	X X.	X X.	X X.	99.	X X.	X X.				
<b>Dimming</b>						Standard: Dimmable to 1% via DALI-2, switch Dim						06.					
<b>Mounting kit</b>						Mounting version 0A 1500 mm steel cable suspension 3000 mm steel cable suspension						A15. A30.					
						X X X X.	X X.	X X.	X X.	X X.	X X.	X X.	X X.				
						X X X X.	X X.	X X.	X X.	X X.	X X.	X X.	X X.				
						X X X X.	X X.	X X.	X X.	X X.	X X.	X X.	000.				

Please order power supply cable separately, see page 2

Pieces:

Complete order number:



---	--	--	--	--	--	--	06.	---
-----	----	----	----	----	----	----	-----	-----





# PALADIO LENS 35


### Mounting versions

#### 0A - Pendant luminaire

- Suspended with height adjustable steel cables (1500 mm or 3000 mm), adjustment to be done on ceiling
- Recommended minimum distance to ceiling for luminaires with indirect light is 500 mm to achieve even illumination
- Power supply integrated in luminaire.
- Position of suspension points can be repositioned on-site if necessary (within limits, please check with our office)
- Power supply cable included for single luminaires
- Connection box optional


#### Suspension points

lengths without additional end caps

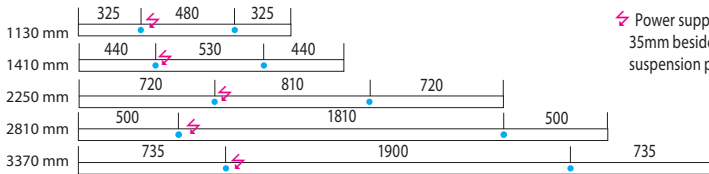


• Suspension points

⚡ Power supply cable always 35mm beside the suspension point

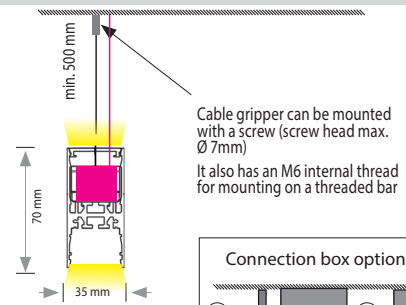

#### Connection box optional






Dimensions in mm

#### 0P - Surface mounted luminaire

- Surface mounting with mounting brackets
- Position of mounting brackets can be adjusted on-site if necessary (within limits, please check with our office)
- Power supply cable not included
- Power supply and terminal clamp integrated in luminaire
- Minimal distance to wall and other objects 50 mm
- Position of power supply outlet flexible


#### Fixation points - have to be equally distributed

lengths without additional end caps

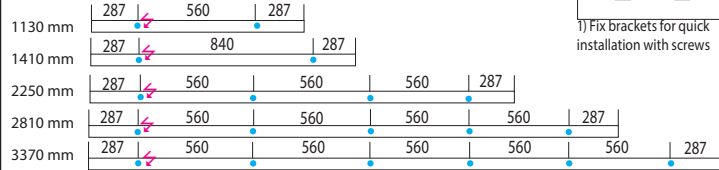

• Fixation points

⚡ Power supply cable

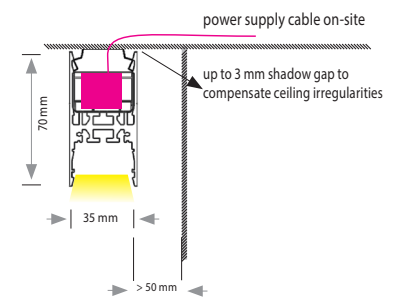



Dimensions in mm

#### 0V - Recessed luminaire with frame

- Luminaire with springs for easy mounting in plasterboard ceiling
- Delivery with quick mounting plug (Adels AC 164/5) incl. 500 mm connection cable
- Up to ceiling thickness of 35 mm
- Fixation points can be adapted on-site if necessary (within limits, please check with our office)


#### Fixation points - have to be equally distributed

lengths without additional end caps

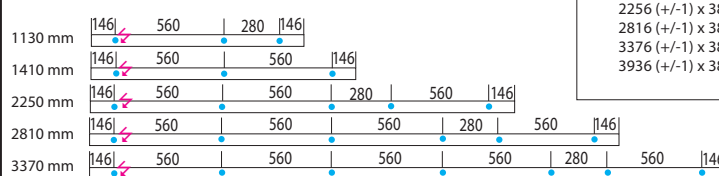

• Fixation points

⚡ Power supply cable

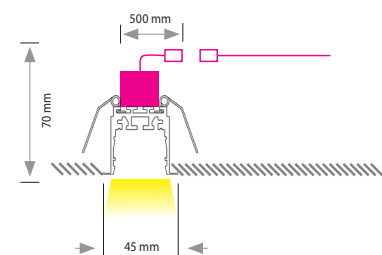

Dimensions in mm

