

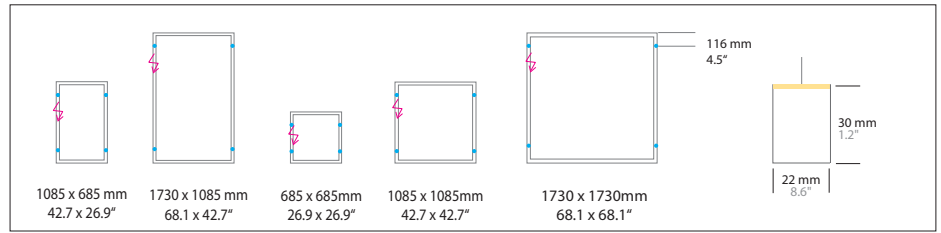


## GIOCO INDIRECT

Housing: Aluminium profile, integrated opal diffuser. Optional acoustic absorber.  
 Design: SATTLER, THEOPHIL EICHLER




	Size: L x W x H mm	Inches	LED Watt	Lumen <sup>1)</sup>	Weight <sup>2)</sup> kg / lbs	Item No.	LED	Dimming	LED	Finishes	Power supply cable	Mounting version
Sizes	1085 x 685 x 30	42.7 x 26.9 x 1.2"	63	3.480	2,4 / 5.3	1560.	X X.	X X.	X X.	X X.	X X X.	X
	1730 x 1085 x 30	68.1 x 42.7 x 1.2"	102	5.570	7,0 / 15.4	1561.	X X.	X X.	X X.	X X.	X X X.	X
	685 x 685 x 30	26.9 x 26.9 x 1.2"	47	2.720	2,2 / 4.85	1562.	X X.	X X.	X X.	X X.	X X X.	X
	1085 x 1085 x 30	42.7 x 42.7 x 1.2"	78	4.270	4,0 / 8.8	1563.	X X.	X X.	X X.	X X.	X X X.	X
	1730 x 1730 x 30	68.1 x 68.1 x 1.2"	125	6.870	8,0 / 17.6	1564.	X X.	X X.	X X.	X X.	X X X.	X
LED	 Standard: Warm-white Optional: Neutral-white, Extra warm-white, Tunable white* *(only in combination with dimming DALI, CASAMBI)	3000 K	X X X.	30.	X X.	X X.	X X.	X X.	X X X.	X		
		4000 K	X X X.	40.	X X.	X X.	X X.	X X X.	X			
		2700 K	X X X.	27.	X X.	X X.	X X.	X X X.	X			
		2700 - 6500 K	X X X.	80.	X X.	X X.	X X.	X X X.	X			
Dimming	 Standard: Without Dimmer Optional: 0 - 10 V, DALI, CASAMBI		X X X.	X X.	01.	00.	X X.	X X X.	X			
			X X X.	X X.	51.	00.	X X.	X X X.	X			
			X X X.	X X.	61.	00.	X X.	X X X.	X			
Finishes	Standard:  66 bronze anodised brushed Optional:  62 black anodised brushed,  65 champ. gold anodised brushed,  60 silver anodised brushed		X X X.	X X.	X X.	X X.	X X.	X X X.	X			
Power supply Cable	Standard:  000 without Mounting Version F/R Optional:  Z 80 Black PVC		X X X.	X X.	X X.	X X.	X X.	X X X.	X			




Technical data is subject to change. Errors and omissions excepted 1) Net lumen output: Losses due to diffusers and reflectors are considered. Lumen values refer to an ambient temperature of max. 35° C / 95° F. 2) Weight of lights without remote technical unit or canopy.

## GIOCO INDIRECT


Housing: Aluminium profile, integrated opal diffuser. Optional acoustic absorber.  
 Design: SATTLER, THEOPHIL EICHLER

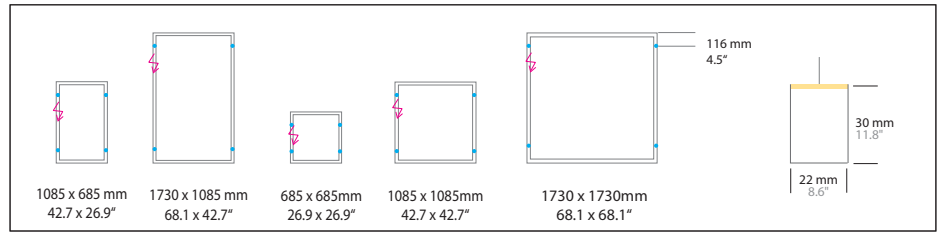


### Mounting Version




4-point suspension with external power supply unit in suspended ceiling




4-point suspension with external power supply unit in separate canopy




Suspension through canopy




4 current-carrying steel cables.



Direct ceiling mounting 50mm / 1.9" with external power supply unit in suspended ceiling



Direct ceiling mounting (white) 50mm / 1.9" with external power supply unit in separate canopy



Suspension with current-carrying steel cables and cavity wall box. B.

Item No.	LED	Dimming	LED	Finishes	Power supply cable	Mounting version
X X X.	X X.	X X.	X X.	X X.	X X X	<input type="checkbox"/>

A, B, G, H, R = Distance of external power supply unit to light fixture max. 10m / 394".  
 E, F = Minimum suspension height, half of the longest side  
 Including steel cable suspension 3000mm/118".

X X X.	X X.	X X.	X X.	X X.	X X X	X
--------	------	------	------	------	-------	---

Complete order number

Type / Size mm / inch L x W x H	For use with Mounting version	Protective rating
DE 1F 363 x 143 x 56 mm / 14.2 x 5.6 x 2.2"	A, G, R	IP 20

Input voltage for all external power supply units and canopy is 220-240 VAC 50-60 Hz

Type / Size mm / inch Ø cover plate / body / H	For use with Mounting version	Protective rating
DB 230 Ø 230 / 210 / 60 mm / 9.5 x 8.3 / 2.3"	B, E, F, H (685x685)	IP 20
DB 290 Ø 290 / 260 / 60 mm / 11.4 x 10.2 / 2.3"	B, E, F, H (1085x685 / 1085x1085)	IP 20
DB 350 Ø 350 / 320 / 60 mm / 13.7 x 12.5 / 2.3"	B, E, F, H (1730x1085 / 1730x1730)	IP 20

USA/Canada: Canopy mounts to 4" octagonal junction box.

### Optional




CASAMBI wall-switch

207. 00. 00. 00. 12. (white)

207. 00. 00. 00. 10. (black)

Casambi wall-switch is a wireless user interface that can be configured via the Casambi app. The four target buttons can control a scene or an animation of the user's choice or simply one luminaire, one luminaire group or all lights together if so desired. Up to 4 groups may be separately programmed. It comes with a wall mounting plate. The switch may be also used on its own as it is attached to the wall plate using magnets.



Power cable cover plate for mounting version A, G

200. 00. 00. 00. 12. (white)

Consisting of a cavity ceiling box with 80mm round metal cover. Applicable to mounting version A, G



Handcrafted in Germany, certified quality



IP 50 Protective rating of luminaire



Indirect light distribution



Protection class III: only suitable for very low voltage supply (<50V)



Luminaires are suitable for mounting on ordinary flammable materials, which have an inflammation point of at least 200° C / 392° F