



PURE MOTION SLIM DIRECT

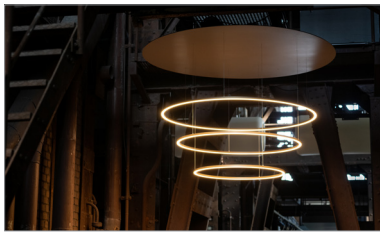

Housing: Circular aluminium profile with integrated opal diffuser. Light art object consisting of a canopy and 3 ring lights made of aluminum, which emit light homogeneously downwards. The rings are continuously moved by 9 winches according to predefined movement patterns.

Idea / Design: Tolga + Yener Gündug

Technical realization: SATTLER

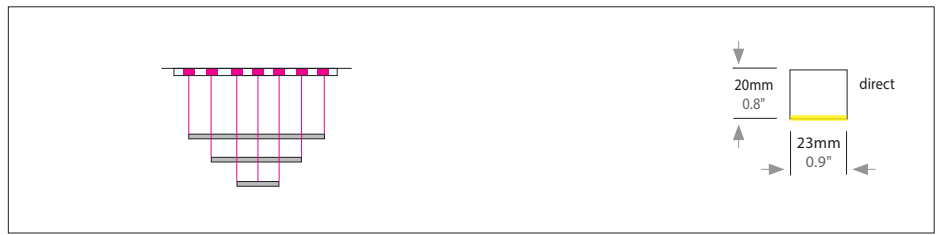



Canopy

Size: Ø mm		Item No.	LED	Dimming	LED	Finish	Power supply cable	Mounting version
		2800.	X X.	X X.	X X.	X X.	X X X.	X
Dimming	Standard:	DALI	X X X.	X X.	61.	X X.	X X X.	X
	Optional:	CASAMBI	X X X.	X X.	81.	X X.	X X X.	X
Finish	12	white, powder coated, similar RAL 9003	X X X.	X X.	X X.	X X.	X X X.	X
	10	black fine textured	X X X.	X X.	X X.	X X.	X X X.	X
Mounting version	Surface mounted	(P)	X X X.	X X.	X X.	X X.	001.	P.
	Recessed	(U)	X X X.	X X.	X X.	X X.	001.	U.
		2800.	00.	---	00.	---	001.	---

Complete order number canopy

Luminaire

		Inches	LED Watt	Lumen ¹⁾	Weight ²⁾ kg/lbs	Item No.	LED	Dimming	LED	Finish	Power supply cable	Mounting version	
Choose three different sizes, ensuring that each one is the next larger size.	Ø 600 mm	23.6"	22	2.192	3.0 / 6.6	710.	X X.	X X.	X X.	X X.	X X X.	X X	
	Ø 900 mm	35.4"	36	3.196	3.5 / 7.7	711.	X X.	X X.	X X.	X X.	X X X.	X X	
	Ø 1240 mm	48.8"	47	4.053	5.0 / 11.0	712.	X X.	X X.	X X.	X X.	X X X.	X X	
	Ø 1550 mm	61.0"	59	5.208	5.5 / 12.1	713.	X X.	X X.	X X.	X X.	X X X.	X X	
LED		Warm-white	3000 K	X X X.	30.	X X.	00.	X X.	X X X.	X X			
		Neutral-white	4000 K	X X X.	40.	X X.	00.	X X.	X X X.	X X			
		Extra warm-white	2700 K	X X X.	27.	X X.	00.	X X.	X X X.	X X			
		Tunable white	2700-6500 K	X X X.	80.	X X.	00.	X X.	X X X.	X X			
Dimming	* same dimming as canopy	Standard:	DALI	X X X.	X X.	61.	X X.	X X.	X X X.	X X			
		Optional:	CASAMBI	X X X.	X X.	81.	X X.	X X.	X X X.	X X			
Finish	Standard:	12	white, powder coated, similar RAL 9003	11	white, similar RAL 9010	10	black fine textured	30	anthracite fine textured	33	sand silver fine textured	34	bronze satined
		Optional (Powder coated):	35	gold	36	brass	37	bronze fine textured	38	copper			
Finish	Optional (Premium):	22	aluminium polished	27	brush-finished aluminium	X X X.	X X.	X X.	X X.	X X.	X X X.	X X	



PURE MOTION SLIM DIRECT

Housing: Circular aluminium profile with integrated opal diffuser. Light art object consisting of a canopy and 3 ring lights made of aluminum, which emit light homogeneously downwards. The rings are continuously moved by 9 winches according to predefined movement patterns.

Idea / Design: Tolga + Yener Gündug

Technical realization: SATTLER




Power supply cable

Without power cable
001
Current-carrying steel cable

Item No.	LED	Dimming	LED	Finish	Power supply cable	Mounting version
X X X.	X X.	X X.	X X.	X X.	001.	X X

Mounting version



9 current-carrying steel cables

---	--.	---	00.	---	001.	PM.
-----	-----	-----	-----	-----	------	-----

Complete order number luminaire

PURE MOTION SLIM DIRECT

The Pure Motion series is a light art object with which you can automatically move the light elements according to predefined motion patterns. The interaction of the different light elements in motion creates a special fascination. The control of the motion images is done via a web interface (local Wifi) using a smartphone, tablet or PC. For this purpose, a Wifi and LAN connection should be provided on site into which the Pure Motion can be integrated. No internet access is necessary, the control of the luminaire takes place exclusively in the local network. The scope of delivery includes 4 motion images, additional motion images can be requested separately from Sattler. Since this light art object is a machine with moving parts, we recommend a maintenance cycle of at least every two years. However, the maintenance intervals are highly dependent on the actual usage (operating hours). Maintenance is a separate service and can be ordered from us as required.


On-site ceiling construction must be designed for a minimum total load of 105 kg

Proper use

- The luminaire is approved for indoor use. People are allowed to stay under the luminaire during operation, provided that the minimum distance of 2.6m from the lowest point of the luminaire to the ground is maintained.
- The luminaire may only be installed in such a way that the function of fire protection equipment is not impaired (e.g. concealment of smoke detectors or line detectors)
- Avoid excessive wind or drafts at the installation site.

Requirements for the power connection

- 16A separately fused - 3 phases



PURE MOTION SLIM DIRECT

Housing: Circular aluminium profile with integrated opal diffuser. Light art object consisting of a canopy and 3 ring lights made of aluminum, which emit light homogeneously downwards. The rings are continuously moved by 9 winches according to predefined movement patterns.

Idea / Design: Tolga + Yener Gündug

Technical realization: SATTLER

