




## SOLUZIONE

Housing: Canopy with multiple suspension  
Design: SATTLER

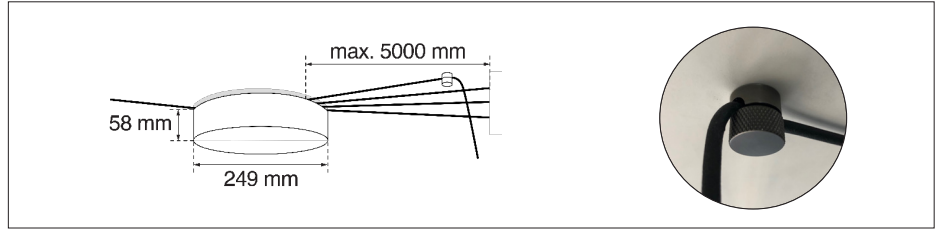

### Soluzione

Size: Ø mm/H mm	Inches	Weight <sup>2)</sup> kg/lbs	Item No.	LED	Dimming	LED	Finish	Power supply cable	Mounting version
Ø 249 mm/58 mm	9.8"/2.3"	4,0 / 8.8	421.	X X.	X X.	X X.	X X.	X X X.	X
<b>Dimming</b> <small>*same dimming as luminaires</small>	Standard: Optional:	DALI* CASAMBI*	X X X. X X X.	X X. X X.	61. 81.	X X. X X.	X X. X X.	X X X. X X X.	X X
<b>Finish</b>  Standard:	 10 black fine textured	Optional:	X X X.	X X.	X X.	X X.	<u>   </u>	X X X.	X
<b>Power supply cable</b> <small>**power supply cable is specified on the basis of luminaire selection</small>	Z 80 PVC black** Z 82 PVC black**	 12 white, powder coated, similar RAL 9003	X X X. X X X.	X X. X X.	X X. X X.	X X. X X.	X X.	000. 000.	X X
			421.	00.	<u>   </u>	00.	<u>   </u>	<u>   </u>	B

Complete order number canopy



Handcrafted in Germany, certified quality



Conforms to UL-STD 1598 Certified to CSA-STD C22.2 No.250.0-08

IP 20

Protective rating of luminaire



Light distribution direct




Protection class III: only suitable for very low voltage supply (<50V)



Luminaires are suitable for mounting on ordinary flammable materials, which have an inflammation point of at least 200° C. / 392° F.

## SOLUZIONE

Housing: Canopy with multiple suspension  
Design: SATTLER

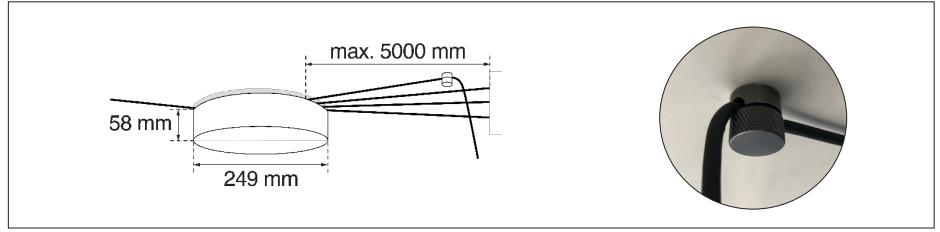

### Luminaires compatible with SOLUZIONE

LED		DIMMING		FINISH								
27	Extra warm-white 2700 K	61	Dali*									
30	Warm-white 3000 K	81	Casambi*	66	60	62	65	22**				
40	Neutral-white 4000 K	*same dimming as canopy		**22 aluminium polished only for Fino Pendant + Tia								
				Ø / L mm	Wattage	Item No.	LED	Dimming	LED	Finish	Power supply cable	Mounting version
TIA		Ø 42 / L 405 mm		6,3	975.	x x.	x x.	00.	x x.	Z80.	B.	
		max. 12 TIA luminaires per canopy										
AVVENI PENDANT 1		Ø 196 / L 101 mm		12,5	1211.	x x.	x x.	00.	62.	Z82.	B.	
		max. 6 AVVENI PENDANT 1 luminaires per canopy										
PALITO		Ø 22 / L 1240 mm		10	1541.	x x.	x x.	00.	x x.	Z80.	B.	
		Ø 22 / L 1550 mm		15	1542.	x x.	x x.	00.	x x.	Z80.	B.	
max. 8 PALITO 1240 mm/ 5 PALITO 1550 luminaires per canopy												
FINO PENDANT		Ø 22 / L 600 mm		4	1533.	x x.	x x.	00.	x x.	Z80.	B.	
		Ø 22 / L 800 mm		4	1534.	x x.	x x.	00.	x x.	Z80.	B.	
		Ø 22 / L 1240 mm		4	1535.	x x.	x x.	00.	x x.	Z80.	B.	
		Ø 22 / L 1550 mm		4	1536.	x x.	x x.	00.	x x.	Z80.	B.	
max. 12 FINO PENDANT luminaires per canopy												
FIO		Ø 40 / L 500 mm		6,3	965.	x x.	x x.	00.	x x.	Z80.	B.	
		Ø 40 / L 750 mm		6,3	968.	x x.	x x.	00.	x x.	Z80.	B.	
max. 12 FIO luminaires per canopy												

Quantity



___	___	___	00.	___	___	B.
-----	-----	-----	-----	-----	-----	----

Complete order number luminaires

Quantity



___	___	___	00.	___	___	B.
-----	-----	-----	-----	-----	-----	----

Complete order number luminaires



Handcrafted in Germany, certified quality



Conforms to UL-STD 1598 Certified to CSA-STD C22.2 No.250.0-08

IP 20

Protective rating of luminaire



Light distribution direct



Protection class III: only suitable for very low voltage supply (<50V)



Luminaires are suitable for mounting on ordinary flammable materials, which have an inflammation point of at least 200° C. / 392° F.