


DUETTO LENS

Housing: Aluminium profile with integrated mini lens reflectors
 Design: SATTLER

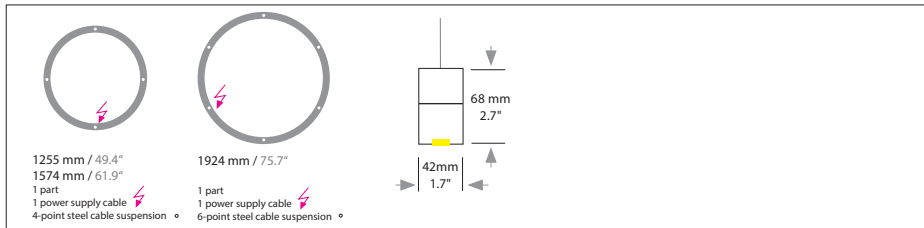

Size: Ø mm	Wattage direct/indirect	Lumen direct/indirect	Lumen / W direct/indirect	Weight kg	Item No.	Mounting version	Colour	LED direct		LED indirect		Dimming	Power supply cable
1255	31/22	3.530/1.135	114/52	10,3	2630.	XX.	XX.	XX.	XX.	XX.	XX.	XX.	XXX.
1574	47/28	5.295/1.430	114/52	13,0	2631.	XX.	XX.	XX.	XX.	XX.	XX.	XX.	XXX.
1924	62/35	7.060/1.768	114/52	14,5	2632.	XX.	XX.	XX.	XX.	XX.	XX.	XX.	XXX.

Mounting version

Mounting version	Diagram	Item No.	Mounting version	Colour	LED direct	LED indirect	Dimming	Power supply cable
Standard		XXXX.	---	XX.	XX.	XX.	XX.	XXX.
Optional								

more information on page 2

Finishes

Finish	Diagram	Item No.	Mounting version	Colour	LED direct	LED indirect	Dimming	Power supply cable
Standard		XXXX.	XX.	---	XX.	XX.	XX.	XXX.
Optional								

LED direct

CRI > 90 | UGR<17
MacAdam 3 | L 80 | B10 | 100.000 h



LED	Standard:	Colour	Temp. (K)	Item No.	Mounting version	Colour	LED direct	LED indirect	Dimming	Power supply cable	
Standard:	Neutral-white	4000 K	4000 K	XXXX.	XX.	XX.	40.	XX.	XX.	XX.	XXX.
Optional:	Extra Warm-white	2700 K	2700 K	XXXX.	XX.	XX.	27.	XX.	XX.	XX.	XXX.
Optional:	Warm-white	3000 K	3000 K	XXXX.	XX.	XX.	30.	XX.	XX.	XX.	XXX.
DIFFUSER	Standard:	mini lens reflector - 50° beam angle UGR<17		XXXX.	XX.	XX.	34.	XX.	XX.	XX.	XXX.

LED indirect

CRI > 90
MacAdam 3 | L 80 | B10 | 100.000 h




LED	Standard:	Colour	Temp. (K)	Item No.	Mounting version	Colour	LED direct	LED indirect	Dimming	Power supply cable		
Standard:	No indirect light output			XXXX.	XX.	XX.	XX.	XX.	00.	00.	XX.	XXX.
Optional:	Extra Warm-white	2700 K	2700 K	XXXX.	XX.	XX.	XX.	XX.	27.	XX.	XX.	XXX.
Optional:	Warm-white	3000 K	3000 K	XXXX.	XX.	XX.	XX.	XX.	30.	XX.	XX.	XXX.
Optional:	Neutral-white	4000 K	4000 K	XXXX.	XX.	XX.	XX.	XX.	40.	XX.	XX.	XXX.
DIFFUSER	Standard:	Opal diffuser		XXXX.	XX.	XX.	XX.	XX.	99.	XX.	XX.	XXX.

Dimming

Dimming	Standard:	Protocol	Item No.	Mounting version	Colour	LED direct	LED indirect	Dimming	Power supply cable	
Standard:	Dali		XXXX.	XX.	XX.	XX.	XX.	XX.	06.	XXX.
Optional:	Casambi		XXXX.	XX.	XX.	XX.	XX.	XX.	08.	XXX.
Optional:	0-10 V		XXXX.	XX.	XX.	XX.	XX.	XX.	05.	XXX.

Power supply cable




Z 70
Silver

Power supply cable	Item No.	Mounting version	Colour	LED direct	LED indirect	Dimming	Power supply cable
Standard:	XXXX.	XX.	XX.	XX.	XX.	XX.	Z70.


Pieces: Complete order number:

----	--.	--.	--.	34.	--.	--.	--.	Z70.
------	-----	-----	-----	-----	-----	-----	-----	------



DUETTO LENS

Housing: Aluminium profile with integrated mini lens reflectors
 Design: SATTLER

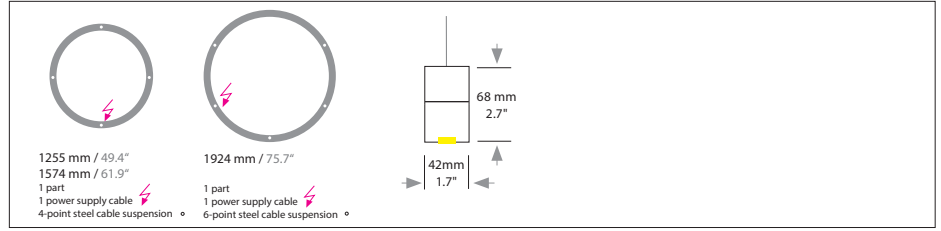

Mounting version

Power supply units:			
Type / Size mm / inch L x W x H	For use with Mounting version	Protective rating	
DE 1F 363 x 143 x 56 mm / 14.2 x 5.6 x 2.2"	A (up to Ø 1924 mm)	IP 20	
Further sizes on request			

Canopy:			
Type/ Size mm / inch Ø cover plate / body / H	For use with Mounting version	Protective rating	
DB 230 Ø 230 / 210 / 60 mm / 9.5 / 8.3 / 2.3"	B, E (Ø 921 mm)	IP 20	
DB 290 Ø 290 / 260 / 60 mm / 11.4 x 10.2 / 2.3"	B, E (up to Ø 1924 mm)	IP 20	
PB 375 Ø 90 H 375 mm / 3.5 x 14.8"	S (up to Ø 1924 mm)	IP 20	
Colour: 12 white, similar RAL 9003, contact factory for other finishes USA/Canada: Canopy mounts to 4" octagonal junction box.			

Input voltage for all external power supply units and canopy is 100-240 VAC 50-60 Hz

A, B = Distance of external power supply unit to light fixture max. 10m / 394"

E, S = Minimum suspension height is half the diameter of light fixture, maximum suspension height two times diameter of light fixture

Including steel cable suspension 3000mm/118" and/or power supply cable 3000mm/118" version S 5000 + 3000mm / 197"+118"


Optional



CASAMBI wall-switch

207. 00. 00. 00. 12. (white)
 207. 00. 00. 00. 10. (black)

Casambi wall-switch is a wireless user interface that can be configured via the Casambi app. The four target buttons can control a scene or an animation of the user's choice or simply one luminaire, one luminaire group or all lights together if so desired. Up to 4 groups may be separately programmed. It comes with a wall mounting plate. The switch may be also used on its own as it is attached to the wall plate using magnets.



Power cable cover plate for mounting version A

200. 00. 00. 00. 12. (white)

Consisting of a cavity ceiling box with 80mm round metal cover. Applicable to mounting version A..

Draft

