


ANELLO



Housing: Circular aluminium-profile with translucent foil. Direct light distribution. Additional indirect lighting possible for background lighting.
Design: SATTLER

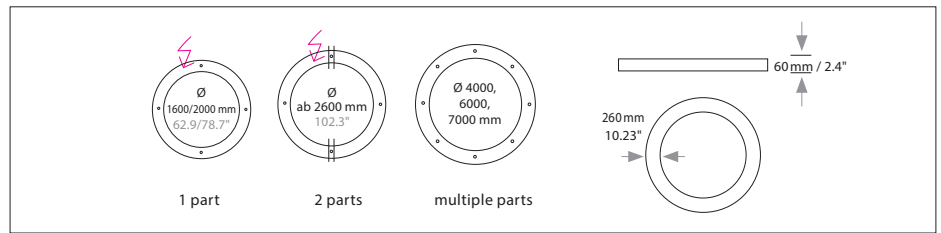

Size: L x W x H mm	Inches	LED Watt	Lumen ¹⁾	Weight ²⁾ kg / lbs	Item No.	LED	Dimming	LED	Finishes	Power supply cable	Mounting version	
Sizes												
Ø 1600 x 260 x 60	62.9 x 10.2 x 2.4"	240	20.383	22 / 49	288.	X X.	X X.	X X.	X X.	X X X.	X	
Ø 2000 x 260 x 60	78.7 x 10.2 x 2.4"	300	25.150	28 / 62	290.	X X.	X X.	X X.	X X.	X X X.	X	
Ø 2600 x 260 x 60	102.3 x 10.2 x 2.4"	380	32.306	39 / 86	292.	X X.	X X.	X X.	X X.	X X X.	X	
Ø 4000 x 260 x 60	157.4 x 10.2 x 2.4"	620	49.000		294.	X X.	X X.	X X.	X X.	X X X.	X	
Ø 6000 x 260 x 60	236.2 x 10.2 x 2.4"	1020	88.000		293.	X X.	X X.	X X.	X X.	X X X.	X	
Ø 7000 x 260 x 60	275.6 x 10.2 x 2.4"	1020	89.000		295.	X X.	X X.	X X.	X X.	X X X.	X	
DIRECT LED CRI > 90 SELV MacAdam 3 L80 B10 100.000 h		Standard: Neutral-white	4000 K		X X X.	40.	X X.	X X.	X X.	X X X.	X	
		Optional: Warm-white	3000 K		X X X.	30.	X X.	X X.	X X.	X X X.	X	
		Optional: Extra warm-white	2700 K		X X X.	27.	X X.	X X.	X X.	X X X.	X	
INDIRECT LED CRI > 90 SELV MacAdam 3 L80 B10 100.000 h		Standard: No indirect LED'S			X X X.	X X.	X X.	00.	X X.	X X X.	X	
		Optional: Neutral-white	4000 K		X X X.	X X.	X X.	40.	X X.	X X X.	X	
		Optional: Warm-white	3000 K		X X X.	X X.	X X.	30.	X X.	X X X.	X	
		Optional: Extra warm-white	2700 K		X X X.	X X.	X X.	27.	X X.	X X X.	X	
Indirect light is significantly weaker than direct light output		Optional: RGB colour control*			X X X.	X X.	X X.	60.	X X.	X X X.	X	
		*(only in combination with dimming DALI, CASAMBI) Combinations up to two stripes of LED possible										
Dimming		Standard: Without Dimmer			X X X.	X X.	02.	X X.	X X.	X X X.	X	
		Optional: 0-10 DALI CASAMBI			X X X.	X X.	52.	X X.	X X.	X X X.	X	
		Optional: DALI CASAMBI			X X X.	X X.	62.	X X.	X X.	X X X.	X	
Finish		Standard: 12 white, powder coated, similar RAL 9003										
		Optional (Powder coated):	11 white, similar RAL 9010									
			10 black fine textured									
			30 anthracite fine textured									
			32 crocodile black									
			33 sand silver fine textured									
			34 bronze satined									
		Optional (Premium): up to Ø 2600 mm bigger on request	35 gold									
			36 brass									
			37 bronze fine textured									
38 copper												
	22 aluminium polished				X X X.	X X.	X X.	X X.	X X X.	X		
	27 brush-finished aluminium											
	XX Custom finish											



Handcrafted in Germany, certified quality



Conforms to UL-STD 1598 Certified to CSA-STD C22.2 No.250.0-08



IP 20 Protective rating of luminaire



Direct/indirect light



Protection class III: only suitable for very low voltage supply (<50V)




Luminaires are suitable for mounting on ordinary flammable materials, which have an inflammation point of at least 200° C / 392° F

ANELLO



Housing: Circular aluminium-profile with translucent foil. Direct light distribution. Additional indirect lighting possible for background lighting.
Design: SATTLER

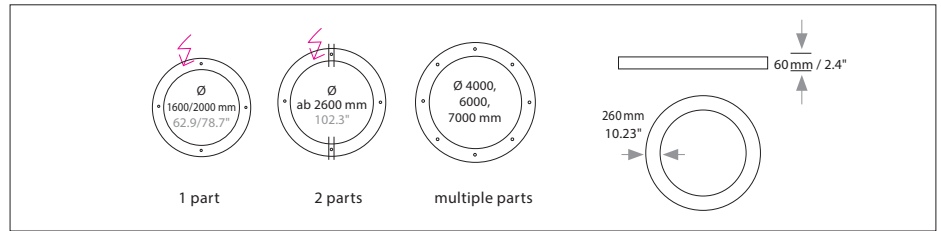

Power supply cable



Z 70
Silver

Optional:



Z 71
white



Z 72
grey



Z 73
black



Z 74
orange




Z 75
red




Z 76
green

Item No.	LED	Dimming	LED	Finishes	Power supply cable	Mounting version
X X X.	X X.	X X.	X X.	X X.	---	X
X X X.	X X.	X X.	X X.	X X.	X X X	---


Mounting Version



4-point suspension with external power supply unit in suspended ceiling



Up to Ø 2000 mm
4-point suspension with external power supply unit in separate canopy



Up to Ø 2000 mm
suspension through canopy

A, B, = Distance of external power supply unit to light fixture max. 10m / 394".

E = Minimum suspension height half the diameter of light fixture, maximum suspension height two times diameter of light fixture

Including steel cable suspension 5000mm / 197" and power supply cable 5000mm / 197"

---	---	---	---	---	---	---
-----	-----	-----	-----	-----	-----	-----

Complete order number

Power supply unit: (1 LED Stripe)

Type / Size mm / inch
L x W x H

For use with Mounting version

Protective rating

DE 3F 363 x 403 x 85 mm / 14.2 x 15.7 x 3.3" A IP 20

Quantity of power supply units depends on configuration

Canopy: (1 LED Stripe)

Type / Size mm / inch
Ø cover plate / body / H

For use with Mounting version

Protective rating

DB 500 Ø 510 / 470 mm / 20,0 x 18.5" B, E (up to size Ø 2000) IP 20

Colour: 12 white, similar RAL 9003, contact factory for other finishes
USA/Canada: Canopy mounts to 4" octagonal junction box.

Input voltage for all external power supply units and canopy is 220-240 VAC 50-60 Hz


Optional



CASAMBI wall-switch

207. 00. 00. 00. 12. (white)
207. 00. 00. 00. 10. (black)

Casambi wall-switch is a wireless user interface that can be configured via the Casambi app. The four target buttons can control a scene or an animation of the user's choice or simply one luminaire, one luminaire group or all lights together if so desired. Up to 4 groups may be separately programmed. It comes with a wall mounting plate. The switch may be also used on its own as it is attached to the wall plate using magnets.



Power cable cover plate for mounting version A

200. 00. 00. 00. 12. (white)

Consisting of a cavity ceiling box with 80mm round metal cover. Applicable to mounting version A.



Handcrafted in Germany, certified quality



Conforms to UL-STD 1598 Certified to CSA-STD C22.2 No.250.0-08



IP 20 Protective rating of luminaire



Direct/indirect light



Protection class III: only suitable for very low voltage supply (<50V)



Luminaires are suitable for mounting on ordinary flammable materials, which have an inflammation point of at least 200° C / 392° F

Technical data is subject to change. Errors and omissions excepted 1) Net lumen output: Losses due to diffusers and reflectors are considered. Lumen values refer to an ambient temperature of max. 35° C / 95° F. 2) Weight of lights without remote technical unit or canopy.