




## DOPPIO LINEA Direct


Housing: Aluminium profile with integrated opal diffuser  
Design: SATTLER

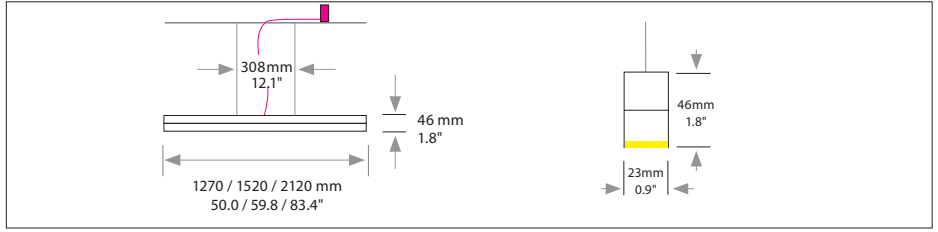



Sizes	Size: Length mm	Inches	LED Watt	Lumen <sup>1)</sup>	Weight <sup>2)</sup> kg/lbs	Item No.	LED	Dimming	LED	Finish	Power supply cable	Mounting version
 Direct	1270 mm	50.0"	23	1.219	2.0 / 4.4 794.	X X.	X X.	X X.	X X.	X X X.	X	
	1520 mm	59.8"	28	1.489	2.5 / 5.5 795.	X X.	X X.	X X.	X X.	X X X.	X	
	2120 mm	83.4"	39	2.051	3.0 / 6.6 796.	X X.	X X.	X X.	X X.	X X X.	X	





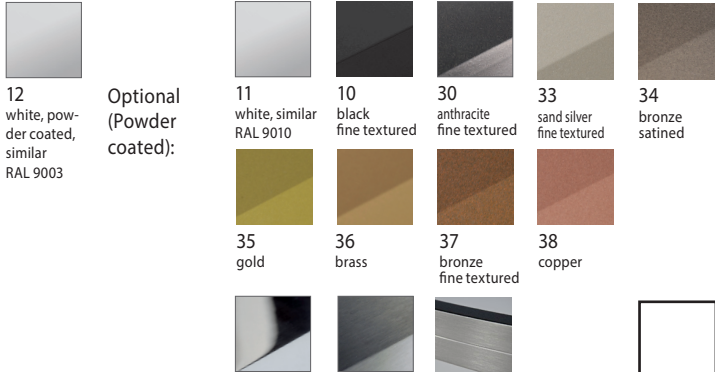

Single lamp, not mountable in row

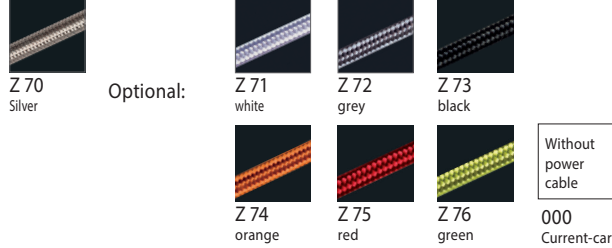LED	Standard:	Warm-white	3000 K	X X X.	30.	X X.	X X.	X X.	X X X.	X
 CRI > 90 Mac Adam 3 SELV L80 B10 100.000 h	Optional:	Neutral-white	4000 K	X X X.	40.	X X.	X X.	X X.	X X X.	X
		Extra warm-white	2700 K	X X X.	27.	X X.	X X.	X X.	X X X.	X
		Tunable white	2700 - 6500 K only in combination with dimming DALI, CASAMBI	X X X.	80.	X X.	X X.	X X.	X X X.	X

Dimming	Standard:	Without Dimmer	X X X.	X X.	01.	00.	X X.	X X X.	X
	Optional:	0 - 10 V	X X X.	X X.	51.	00.	X X.	X X X.	X
		DALI	X X X.	X X.	61.	00.	X X.	X X X.	X
		CASAMBI	X X X.	X X.	81.	00.	X X.	X X X.	X

Finish	Standard:	Optional (Powder coated):	Optional (Premium):	X X X.	X X.	X X.	X X.	X X X.	X
	12 white, powder coated, similar RAL 9003	11 white, similar RAL 9010	10 black fine textured	30 anthracite fine textured	33 sand silver fine textured	34 bronze satined			
		35 gold	36 brass	37 bronze fine textured	38 copper				
		22 aluminium polished	27 brush-finished aluminium	22, 27 Ring aluminium polished or brush-finished Top cover black	XX Custom finish				


Power supply cable	Standard:	Optional:	Without power cable	X X X.	X X.	X X.	X X.	X X X.	X
	Z 70 Silver	Z 71 white	Z 72 grey	Z 73 black					
		Z 74 orange	Z 75 red	Z 76 green	000 Current-carrying F, R, T, K				

 Handcrafted in Germany, certified quality  
 Conforms to UL-STD 1598 Certified to CSA-STD C22.2 No.250.0-08  
 IP 50 Protective rating of luminaire  
 Direct light distribution  
 Protection class III: only suitable for very low voltage supply (<50V)  
 Luminaires are suitable for mounting on ordinary flammable materials, which have an inflammation point of at least 200° C. / 392° F.


## DOPPIO LINEA Direct




Housing: Aluminium profile with integrated opal diffuser  
Design: SATTLER

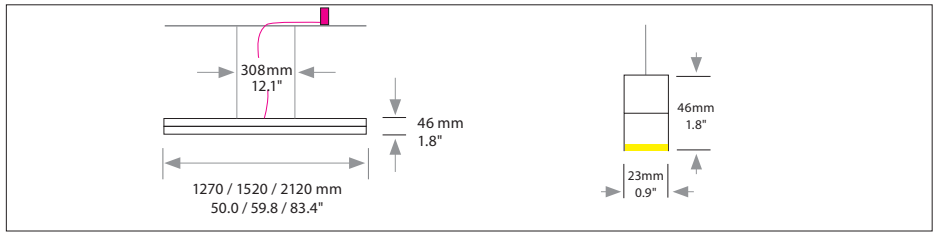


### Mounting version




2-point suspension with external power supply unit in suspended ceiling



suspension through canopy.



current-carrying steel cables. Not in combination with RGB.



Suspension with current-carrying steel cables and cavity wall box. Not in combination with RGB.

Item No.	LED	Dimming	LED	Finish	Power supply cable	Mounting version
X X X.	X X.	X X.	X X.	X X.	X X X	...

A, R = Distance of external power supply unit to light fixture max. 10m / 394".

Including steel cable suspension 3000mm / 118.1"  
or/and power supply cable 3000mm / 118.1"



---	---	---	---	---	---	---
-----	-----	-----	-----	-----	-----	-----

Complete order number

Power supply units:		Type / Size mm / inch L x W x H	For use with Mounting version	Protective rating
	DE 1F	363 x 143 x 56 mm / 14.2 x 5.6 x 2.2"	A,R	IP 20

Canopy:		Type / Size mm / inch	For use with Mounting version	Protective rating
	DBL 390	L 390 x W 70 x H 70 mm	F, E	IP 10
Colour: 12 white, similar RAL 9003, contact factory for other finishes				
USA/Canada: Canopy mounts to 4" octagonal junction box.				

Input voltage for all external power supply units and canopy is 220-240 VAC 50-60 Hz


### Optional



CASAMBI wall-switch

207. 00. 00. 00. 12. (white)  
207. 00. 00. 00. 10. (black)

Casambi wall-switch is a wireless user interface that can be configured via the Casambi app. The four target buttons can control a scene or an animation of the user's choice or simply one luminaire, one luminaire group or all lights together if so desired. Up to 4 groups may be separately programmed. It comes with a wall mounting plate. The switch may be also used on its own as it is attached to the wall plate using magnets.



Power cable cover plate for mounting version A

200. 00. 00. 00. 12. (white)

Consisting of a cavity ceiling box with 80mm round metal cover. Applicable to mounting version A.



Handcrafted in Germany, certified quality



Conforms to UL-STD 1598 Certified to CSA-STD C22.2 No.250.0-08



Protective rating of luminaire



Direct light distribution



Protection class III: only suitable for very low voltage supply (<50V)



Luminaires are suitable for mounting on ordinary flammable materials, which have an inflammation point of at least 200° C. / 392° F.