


FINO PENDANT

Housing: Pendant light, solid aluminium housing
 Design: Ulrich Sattler | Michael Schmidt, Code2design

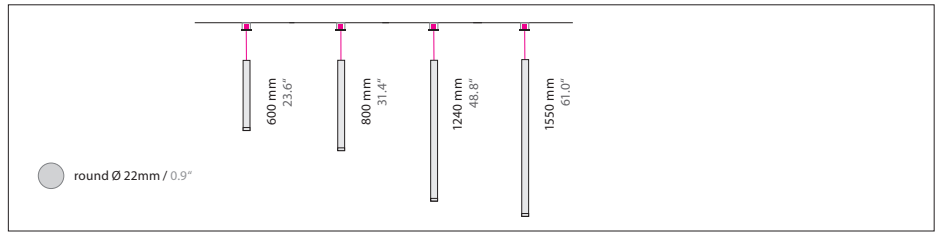

	Size: Ø / L mm	Inches	LED Watt	Lumen ¹⁾	Weight ²⁾ kg/lbs	Item No.	LED	Dimming	LED	Finish	Power supply cable	Mounting version	
Sizes	Ø 22 / L 600 mm	Ø 0.9 / L 23.6"	4	365	0,4 / 0.8	1533.	xx.	xx.	xx.	xx.	xxx.	xx	
	Ø 22 / L 800 mm	Ø 0.9 / L 31.4"	4	365	0,5 / 1.1	1534.	xx.	xx.	xx.	xx.	xxx.	xx	
	Ø 22 / L 1240 mm	Ø 0.9 / L 48.8"	4	365	0,7 / 1.5	1535.	xx.	xx.	xx.	xx.	xxx.	xx	
	Ø 22 / L 1550 mm	Ø 0.9 / L 61.0"	4	365	0,8 / 1.7	1536.	xx.	xx.	xx.	xx.	xxx.	xx	
LED CRI > 90		Standard:	Warm-white	3000 K		xxxx.	30.	xx.	xx.	xx.	xxx.	xx	
		Optional:	Neutral-white Extra warm-white	4000 K 2700 K		xxxx. xxxx.	40. 27.	xx. xx.	xx. xx.	xx. xx.	xxx. xxx.	xx xx	
SELV													
Dimming		Standard:	TRIAC DALI			xxxx. xxxx.	xx. xx.	11. 61.	00. 00.	xx. xx.	xxx. xxx.	xx xx	
		Optional:	DALI Casambi			xxxx. xxxx.	xx. xx.	61. 81.	00. 00.	xx. xx.	xxx. xxx.	xx xx	
Finish		Standard:	66 bronze anodised brushed	Optional:	60 silver anodised brushed	62 black anodised brushed	65 champ. gold anodised brushed	22 aluminium polished					
									xxxx.	xx.	xx.	xx.	xx.
Power supply cable		Z 80 Black matt				xxxx.	xx.	xx.	xx.	xx.	Z80.	xx	
Mounting version		Standard:	F Suspension with canopy DB 78/32 and 1 power supply cable 2000 mm / 78.7"	Optional:	R Cover Ø 80 mm / 3.1" ceiling cutout 68 mm / 2.7" Power supply unit in cavity box U3 Cover Ø 50 mm / 2.0" ceiling cutout 35 mm / 1.4" Power supply unit in suspended ceiling * mounting version U3 available from the 1st quarter of 2021	Z Suspension with PALADIO TRACK System							
							xxxx.	xx.	xx.	xx.	xx.	xxx.	xx

Canopy:		
Type	For use with Mounting version	Protective rating
 DA 50	Cover Ø 50 mm / 2.0" Ceiling cutout 35 mm / 2.0" Power supply unit in suspended ceiling 3) an inspection flap is required for the power supply unit white (22 polished) Same colour as luminaire (60,62,65,66)	U3 IP 40
 DA 80	Cover Ø 80 mm / 3.1" ceiling cutout 68 mm / 2.7" Power supply unit in cavity box white similar RAL 9003	R IP 40
 DB 78/32	Cover Ø 78 mm / 3.0" H 32 mm / 1.2" white (22 polished) Same colour as luminaire (60,62,65,66)	F IP 40

Input voltage for all external power supply units and canopy is 220-240 VAC 50-60 Hz.

---	---	---	00.	---	Z80.	---
-----	-----	-----	-----	-----	------	-----

Complete order number

Compatible TRIAC Dimmers

Manufacturer	Model	Quantity of parallel connection
JUNG	1224 LED UDE	14
JUNG	1731 DD	10
Merten	SBD200LED	13
ABB Busch-Jaeger	6519 U	15
ABB Busch-Jaeger	6526 U	13
Berker	296110	10
Berker	2973	12
Schneider	SBD200LED ELG174231	13

