

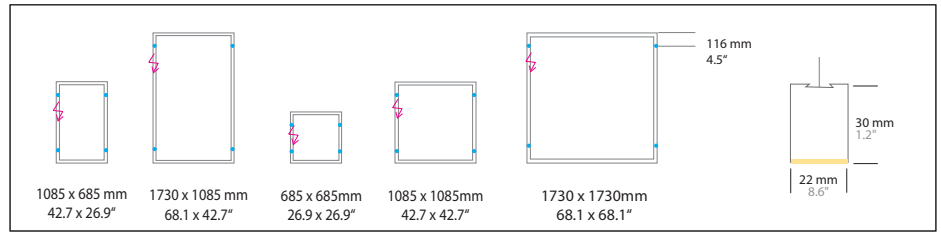


## GIOCO DIRECT

Housing: Aluminium profile, integrated opal diffuser. Optional acoustic absorber.  
 Design: SATTLER, THEOPHIL EICHLER




	Size: L x W x H mm	Inches	LED Watt	Lumen <sup>1)</sup>	Weight <sup>2)</sup> kg / lbs	Item No.	LED	Dimming	LED	Finishes	Power supply cable	Mounting version
Sizes	1085 x 685 x 30	42.7 x 26.9 x 1.2"	50	3.433	2,4 / 5.3	1550.	X X.	X X.	X X.	X X.	X X X.	X
	1730 x 1085 x 30	68.1 x 42.7 x 1.2"	79	5.460	7,0 / 15.4	1551.	X X.	X X.	X X.	X X.	X X X.	X
	685 x 685 x 30	26.9 x 26.9 x 1.2"	38	2.657	2,2 / 4.85	1552.	X X.	X X.	X X.	X X.	X X X.	X
	1085 x 1085 x 30	42.7 x 42.7 x 1.2"	61	4.209	4,0 / 8.8	1553.	X X.	X X.	X X.	X X.	X X X.	X
	1730 x 1730 x 30	68.1 x 68.1 x 1.2"	97	6.711	8,0 / 17.6	1554.	X X.	X X.	X X.	X X.	X X X.	X
LED	 Standard: Warm-white Optional: Neutral-white, Extra warm-white, Tunable white* * (only in combination with dimming DALI, CASAMBI)	3000 K	X X X X.	30.	X X.	X X.	X X.	X X.	X X X.	X		
		4000 K	X X X X.	40.	X X.	X X.	X X.	X X X.	X			
		2700 K	X X X X.	27.	X X.	X X.	X X.	X X X.	X			
		2700 - 6500 K	X X X X.	80.	X X.	X X.	X X.	X X X.	X			
Dimming	 Standard: Without Dimmer Optional: 0 - 10 V, DALI, CASAMBI		X X X X.	X X.	01.	00.	X X.	X X X.	X			
			X X X X.	X X.	51.	00.	X X.	X X X.	X			
			X X X X.	X X.	61.	00.	X X.	X X X.	X			
		X X X X.	X X.	81.	00.	X X.	X X X.	X				
Finishes	Standard:  66 bronze anodised brushed Optional:  62 black anodised brushed,  65 champ. gold anodised brushed,  60 silver anodised brushed		X X X X.	X X.	X X.	X X.	X X.	X X X.	X			
			X X X X.	X X.	X X.	X X.	X X.	X X X.	X			
Power supply Cable	Standard:  000 without Mounting Version F/R Optional:  Z 80 Black PVC		X X X X.	X X.	X X.	X X.	X X.	X X X.	X			
			X X X X.	X X.	X X.	X X.	X X.	X X X.	X			




Technical data is subject to change. Errors and omissions excepted 1) Net lumen output: Losses due to diffusers and reflectors are considered. Lumen values refer to an ambient temperature of max. 35° C / 95° F. 2) Weight of lights without remote technical unit or canopy.

## GIOCO DIRECT


Housing: Aluminium profile, integrated opal diffuser. Optional acoustic absorber.  
 Design: SATTLER, THEOPHIL EICHLER

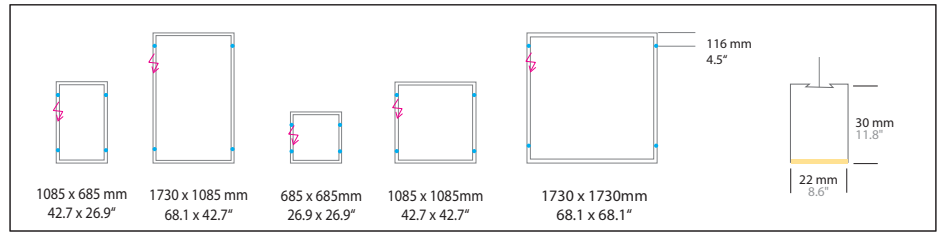


### Mounting Version




4-point suspension with external power supply unit in suspended ceiling




4-point suspension with external power supply unit in separate canopy




Suspension through canopy




4 current-carrying steel cables.



Direct ceiling mounting 50mm / 1.9" with external power supply unit in suspended ceiling



Direct ceiling mounting (white) 50mm / 1.9" with external power supply unit in separate canopy



Suspension with current-carrying steel cables and cavity wall box. B.

Item No.	LED	Dimming	LED	Finishes	Power supply cable	Mounting version
X X X X.	X X.	X X.	X X.	X X.	X X X	.

A, B, G, H, R = Distance of external power supply unit to light fixture max. 10m / 394".  
 E, F = Minimum suspension height, half of the longest side  
 Including steel cable suspension 3000mm/118".

X X X X.	X X.	X X.	X X.	X X.	X X X	X
----------	------	------	------	------	-------	---

Complete order number

Type / Size mm / inch L x W x H	For use with Mounting version	Protective rating
DE 1F 363 x 143 x 56 mm / 14.2 x 5.6 x 2.2"	A, G, R	IP 20

Input voltage for all external power supply units and canopy is 220-240 VAC 50-60 Hz

Type / Size mm / inch Ø cover plate / body / H	For use with Mounting version	Protective rating
DB 230 Ø 230 / 210 / 60 mm / 9.5 x 8.3 / 2.3"	B, E, F, H (685x685)	IP 20
DB 290 Ø 290 / 260 / 60 mm / 11.4 x 10.2 / 2.3"	B, E, F, H (1085x685 / 1085x1085)	IP 20
DB 350 Ø 350 / 320 / 60 mm / 13.7 x 12.5 / 2.3"	B, E, F, H (1730x1085 / 1730x1730)	IP 20

USA/Canada: Canopy mounts to 4" octagonal junction box.

### Optional




CASAMBI wall-switch

207. 00. 00. 00. 12. (white)

207. 00. 00. 00. 10. (black)

Casambi wall-switch is a wireless user interface that can be configured via the Casambi app. The four target buttons can control a scene or an animation of the user's choice or simply one luminaire, one luminaire group or all lights together if so desired. Up to 4 groups may be separately programmed. It comes with a wall mounting plate. The switch may be also used on its own as it is attached to the wall plate using magnets.



Power cable cover plate for mounting version A, G

200. 00. 00. 00. 12. (white)

Consisting of a cavity ceiling box with 80mm round metal cover. Applicable to mounting version A, G



ACOUSTIC-SET

Acoustic absorber with highly effective sound absorption  $\alpha = 0,9$ , light or dark grey, incl. mounting brackets, can also be retrofitted to existing luminaire.

1085 x 685 mm  
 1730 x 1085 mm  
 685 x 685 mm  
 1085 x 1085 mm





1 part

301. 00. 00. 00. 90 (light grey) 91 (dark grey)  
 302. 00. 00. 00. 90 (light grey) 91 (dark grey)  
 303. 00. 00. 00. 90 (light grey) 91 (dark grey)  
 304. 00. 00. 00. 90 (light grey) 91 (dark grey)

1730 x 1730 mm

technically not possible



Technical data is subject to change. Errors and omissions excepted 1) Net lumen output: Losses due to diffusers and reflectors are considered. Lumen values refer to an ambient temperature of max. 35° C / 95° F. 2) Weight of lights without remote technical unit or canopy.