


Housing: Recessed downlight with aluminium frame
 Design: SATTLER

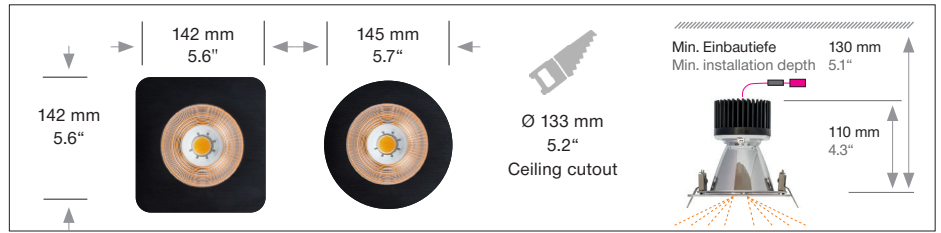

Sizes	Size: L x W / Ø mm	Inches	LED Watt	Lumen ¹⁾	Weight ²⁾ kg/lbs	Item No.	LED	Dimming	LED	Finish	Power supply cable	Mounting version
	142 x 142	5.6 x 5.6	11° 18	2000	0,6 / 1.32	1019.	xx.	xx.	xx.	xx.	xxx.	x
	142 x 142	5.6 x 5.6	20° 18	2000	0,6 / 1.32	1020.	xx.	xx.	xx.	xx.	xxx.	x
	142 x 142	5.6 x 5.6	47° 18	2000	0,6 / 1.32	1021.	xx.	xx.	xx.	xx.	xxx.	x
	142 x 142	5.6 x 5.6	asym. 18	2000	0,6 / 1.32	1022.	xx.	xx.	xx.	xx.	xxx.	x
	Ø 145	Ø 5.7	11° 18	2000	0,6 / 1.32	1513.	xx.	xx.	xx.	xx.	xxx.	x
	Ø 145	Ø 5.7	20° 18	2000	0,6 / 1.32	1514.	xx.	xx.	xx.	xx.	xxx.	x
	Ø 145	Ø 5.7	47° 18	2000	0,6 / 1.32	1515.	xx.	xx.	xx.	xx.	xxx.	x
	Ø 145	Ø 5.7	asym. 18	2000	0,6 / 1.32	1516.	xx.	xx.	xx.	xx.	xxx.	x

ideal for a ceiling thickness of 1-25 mm

LED CRI > 95 *CRI > 90 *only DALI, always with cover		Standard: Neutral-white	4000 K	xxxx.	40.	xx.	xx.	xx.	xx.	x
		Optional: Warm-white	3000 K	xxxx.	30.	xx.	xx.	xx.	xx.	x
		Extra warm-white	2700 K	xxxx.	27.	xx.	xx.	xx.	xx.	x
		*Tunable white	2700-6500 K	xxxx.	80.	xx.	xx.	xx.	xx.	x

Dimming 	Standard: DALI, Switch Dim, 1-10 V	xxxx.	xx.	61.	00.	xx.	xxx.	x
	Optional: CASAMBI	xxxx.	xx.	81.	00.	xx.	xxx.	x

Finishes Standard:	12 white, similar RAL 9003	Optional:	10 black fine textured	Premium:	22 aluminium polished	60 silver anodised	62 black anodised	65 champ. gold anodised	66 bronze anodised	xxxx.	xx.	xx.	xx.	---	xx.	x
----------------------------------	----------------------------	-----------	------------------------	----------	-----------------------	--------------------	-------------------	-------------------------	--------------------	-------	-----	-----	-----	-----	-----	---

Power supply	included, downlight and power supply connected with plug for easy installation
Option	IP 44 upgrade 211.00.00.00.00 Suitable for concrete mounting kit: (recommended) e.g. KAISER 1292-14 + KAISER 1292-27 with transformer tunnel

For order quantities of more than 30 pieces, measures of the aluminium frame can be individually adjusted.

Complete order number: _____ . 00. _____ . _____ . V

Input voltage for all external power supply units and canopy is 220-240 VAC 50/60 Hz

Handcrafted in Germany, certified quality
 Protective rating luminaire
 Direct light distribution
 Protection class II
 Luminaires are suitable for mounting on ordinary flammable materials, which have an inflammation point of at least 200° C. / 392° F.