


SLIM OUT

Housing: Aluminium profile with integrated opal diffuser
 Design: SATTLER



Luminaire similar to photo

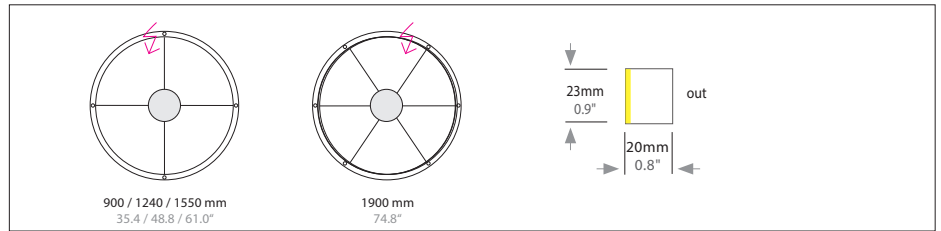

Size: Ø mm	Inches	LED Watt	Lumen ¹⁾	Weight ²⁾ kg/lbs	Item No.	LED	Dimming	LED	Finish	Power supply cable	Mounting version	
Ø 900 mm	35.4"	51	2.935	3.5 / 7.7	723.	X X.	X X.	X X.	X X.	X X X.	X	
Ø 1240 mm	48.8"	71	4.186	5.0 / 11.0	724.	X X.	X X.	X X.	X X.	X X X.	X	
Ø 1550 mm	61.0"	88	5.243	5.5 / 12.1	725.	X X.	X X.	X X.	X X.	X X X.	X	
Ø 1900 mm	74.8"	108	6.414	6.0 / 13.2	726.	X X.	X X.	X X.	X X.	X X X.	X	
LED CRI > 90 Mac Adam 3 SELV L80 B10 100.000 h		Standard: Warm-white 3000 K			X X X.	30.	X X.	X X.	X X.	X X X.	X	
		Optional: Neutral-white 4000 K Extra warm-white 2700 K			X X X. X X X.	40. 27.	X X. X X.	X X. X X.	X X. X X.	X X X. X X X.	X X	
		Tunable white* 2700 - 6500 K RGB colour control* *only in combination with dimming DALI, CASAMBI			X X X. X X X.	80. 60.	X X. X X.	X X. X X.	X X. X X.	X X X. X X X.	X X	
Dimming		Standard: Without Dimmer			X X X.	X X.	01.	00.	X X.	X X X.	X	
		Optional: 0 - 10 V DALI CASAMBI			X X X. X X X. X X X.	X X. X X. X X.	51. 61. 81.	00. 00. 00.	X X. X X. X X.	X X X. X X X. X X X.	X X X	
Finish	Standard:											
		12 white, powder coated, similar RAL 9003	11 white, similar RAL 9010	10 black fine textured	30 anthracite fine textured	33 sand silver fine textured	34 bronze satined					
		Optional (Powder coated):										
		35 gold	36 brass	37 bronze fine textured	38 copper							
	Optional (Premium):											
		22 aluminium polished	27 brush-finished aluminium			XX Custom finish	X X X.	X X.	X X.	X X.	X X X.	X
Power supply cable	Standard:											
		000 Without power cable Current-carrying F, R, T, K	Optional:	Z 70 Silver	Z 71 white	Z 72 grey	Z 73 black					
									X X X.	X X.	X X.	X X.
		Z 74 orange	Z 75 red	Z 76 green								



Handcrafted in Germany, certified quality



Conforms to UL-STD 1598 Certified to CSA-STD C22.2 No.250.0-08



IP 50 Protective rating of luminaire



Light distribution outwards



Protection class III: only suitable for very low voltage supply (<50V)




Luminaires are suitable for mounting on ordinary flammable materials, which have an inflammation point of at least 200° C. / 392° F.

SLIM OUT


Housing: Aluminium profile with integrated opal diffuser
 Design: SATTLER




Luminaire similar to photo

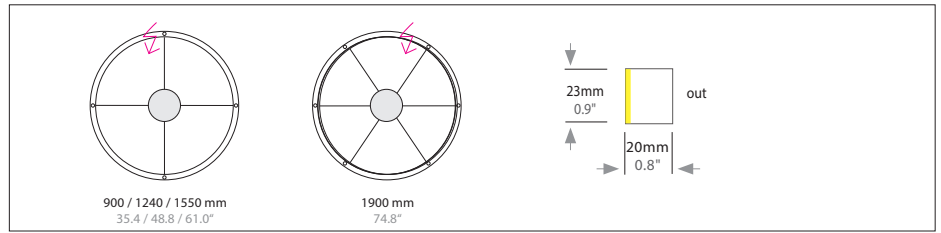


Mounting version




up to Ø 1550 mm / 61.0"
 4-point suspension
 1900 mm / 74.8"
 6-point suspension with external power supply unit in suspended ceiling




up to Ø 1550 mm / 61.0"
 4-point suspension
 1900 mm / 74.8"
 6-point suspension with external power supply unit in separate canopy




suspension through canopy




4/6 current-carrying steel cables. Not in combination with RGB




Suspension with current-carrying steel cables and cavity wall box. Not in combination with RGB.




Suspension with pendant canopy PB 375 and steel cables
 (a) 5000 mm / 196.8" +
 (b) 3000 mm / 118.1"



Suspension with pendant canopy PB 375 and current-carrying steel cables.
 (a) 5000 mm / 196.8" +
 (b) 3000 mm / 118.1"
 Not in combination with RGB.



Direct ceiling mounting
 50mm / 1.9" with external power supply unit in suspended ceiling



Suspension point as clamping unit with 4 cables and remote technical unit in suspended ceiling.

Item No.	LED	Dimming	LED	Finish	Power supply cable	Mounting version
X X X.	X X.	X X.	X X.	X X.	X X X	-

---	---	---	---	---	---	---
-----	-----	-----	-----	-----	-----	-----

Complete order number

A, B, G, R, K = Distance of external power supply unit to light fixture max. 10m / 394".

S, T, K, E, F = Minimum suspension height half the diameter of light fixture, maximum suspension height two times diameter of light fixture

Including steel cable suspension Version F,R 3000mm/118" version S,T 5000 + 3000mm / 197"+118" and/or power supply cable 5000mm/197"

Power supply unit:		For use with Mounting version	Protective rating
	Type / Size mm / inch L x W x H		
DE 1F	363 x 143 x 56 mm / 14.2 x 5.6 x 2.2"	A,G,R,K	IP 20

Input voltage for all external power supply units and canopy is 220-240 VAC 50-60 Hz

Canopy:		For use with Mounting version	Protective rating
	Type/ Size mm / inch Ø cover plate / body / H		
DB 230	Ø 230 / 210 / 60 mm / 9.5 / 8.3 / 2.3"	B, E, F (up to Ø 900 mm)	IP 20
DB 290	Ø 290 / 260 / 60 mm / 11.4 x 10.2 / 2.3"	B, E, F (up to Ø 1550 mm)	IP 20
DB 350	Ø 350 / 320 / 60 mm / 13.7 x 12.5 / 2.3"	B, E, F (up to Ø 1900 mm)	IP 20
PB 375	Ø 90 H 375 mm / 3.5 x 14.8"	S, T	IP 20
Colour: 12 white, similar RAL 9003, contact factory for other finishes			
USA/Canada: Canopy mounts to 4" octagonal junction box.			


Optional



CASAMBI wall-switch

207. 00. 00. 00. 12. (white)
 207. 00. 00. 00. 10. (black)

Casambi wall-switch is a wireless user interface that can be configured via the Casambi app. The four target buttons can control a scene or an animation of the user's choice or simply one luminaire, one luminaire group or all lights together if so desired. Up to 4 groups may be separately programmed. It comes with a wall mounting plate. The switch may be also used on its own as it is attached to the wall plate using magnets.



Power cable cover plate for mounting version A, G

200. 00. 00. 00. 12. (white)

Consisting of a cavity ceiling box with 80mm round metal cover. Applicable to mounting version A., G.



Handcrafted in Germany, certified quality



Conforms to UL-STD 1598 Certified to CSA-STD C22.2 No.250.0-08



Protective rating of luminaire



Light distribution outwards



Protection class III: only suitable for very low voltage supply (<50V)



Luminaires are suitable for mounting on ordinary flammable materials, which have an inflammation point of at least 200° C. / 392° F.