



## SLIM TABLE

Housing: Aluminium profile with integrated opal diffuser  
 Design: MARKUS BISCHOF

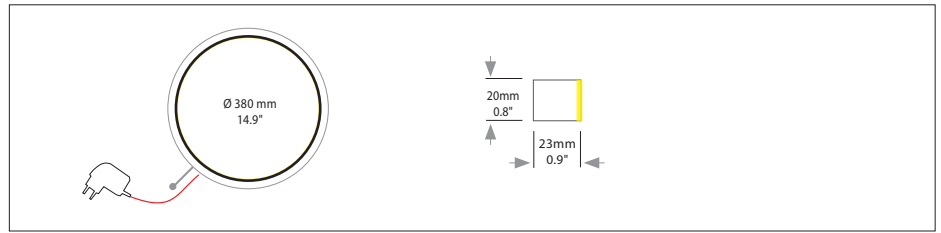

Size: Ø mm	Inches	LED Watt	Lumen <sup>1)</sup>	Weight <sup>2)</sup> kg/lbs	Item No.	LED	Dimming	LED	Finish	Power supply cable	Mounting version
Size	Ø 380 mm	14	897	1.0 / 2.2	737.	X X.	X X.	X X.	X X.	X X X.	
LED	Standard: Warm-white Optional: Neutral-white Extra warm-white	3000 K	X X X.	30.	X X.	X X.	X X.	X X X.	X.		
		4000 K	X X X.	40.	X X.	X X.	X X.	X X X.	X.		
		2700 K	X X X.	27.	X X.	X X.	X X.	X X X.	X.		
Dimming	Standard: Touchdimmer		X X X.	X X.	21.	00.	X X.	X X X.	X.		
Finish	Standard: 12 white, powder coated, similar RAL 9003 Optional (Powder coated): 11 white, similar RAL 9010, 10 black fine textured, 30 anthracite fine textured, 33 sand silver fine textured, 34 bronze satined, 35 gold, 36 brass, 37 bronze fine textured, 38 copper Optional (Premium): 22 aluminium polished, 27* brush-finished aluminium, *27 Ring brush-finished Foot of the light 22 aluminium polished, XX Custom finish										
			X X X.	X X.	X X.	X X.	X X.	X X X.	X.		
Power supply cable	Standard: Z 91 PVC cable white 1900mm/74" for finish 12 white Optional: Z 90 PVC cable black 1900mm/74" for all optional finishes										
			X X X.	X X.	X X.	X X.	X X.	X X X.	X.		

### Mounting version



includes country-specific plug



Table lamp including 1900mm/74" connection cable (black) with power adapter  
 Input voltage for all external power supply units and canopy is 220-240 VAC 50-60 Hz



737.	---	21.	00.	---	---	L
------	-----	-----	-----	-----	-----	---

Complete order number



Handcrafted in Germany, certified quality



Conforms to UL-STD 1598 Certified to CSA-STD C22.2 No.250.0-08



Protective rating of luminaire



Light distribution inwards



Protection class III: only suitable for very low voltage supply (<50V)



Luminaires are suitable for mounting on ordinary flammable materials, which have an inflammation point of at least 200° C. / 392° F.