



AVVENI

DOWNLIGHT frameless





SATTLER

Product-information: Downlight, light head can be taken off and is fully adjustable through a magnetic hinge system. Light heads are available as flood or spot versions (lenses with 26 and 34 degrees).

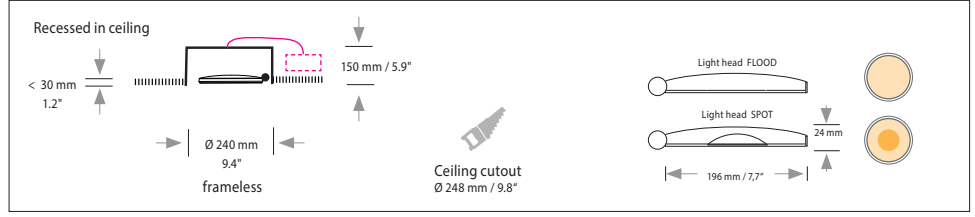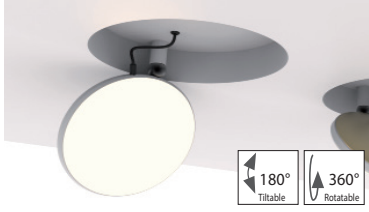

STRUCTURE

STRUCTURE					STRUCTURE				
Type	Installation Ø / depth mm	Installation Ø / depth inches	LED Watt	weight kg ² / lbs ²	Type No.	Finish 1	DIM	Power Supply Cable	Mounting Version
	Ø 248 / 150	Ø 9.8 / 5.9"	12,5 W	2.5 / 5.5	1115.	xx.	xx.	xx.	xx.
Finish 1	Installation housing in white				xxxx.	12	xx.	xx.	xx.
Dimmer	DALI-2 TRIAC	Standard			xxxx.	xx.	06	xx.	xx.
Power Supply Cable	without visible power supply cable				xxxx.	xx.	xx.	00	xx.
Mounting Version	V up to ceiling thickness ≤ 30 mm	Standard			xxxx.	xx.	xx.	xx.	0V



OrderNo.STRUCTURE

LIGHT HEAD

				LIGHT HEAD							
Type	Finish 2	Finish 3	LED	Type No.	Finish 2	Finish 3	LED	Kelvin	Beam angle		
				01	xx.	xx.	xx.	xx.	xx.	xx.	xx.
Finish 2 Light head outside ring	12 white matt RAL 9003	62 (14) black matt	22 aluminum polished	Standard	xx.	12	xx.	xx.	xx.	xx.	xx.
Finish 3 Light head top cover	60 silver anodised	61 gold anodised	62 black anodised	Standard	xx.	xx.	60	xx.	xx.	xx.	xx.
LED	LED	Extra warm-white 2700 K		xx.	xx.	xx.	27	xx.	xx.	xx.	xx.
CRI >92	SELV	Warm-white 3000 K		xx.	xx.	xx.	30	xx.	xx.	xx.	xx.
		Neutral-white 4000 K		xx.	xx.	xx.	40	xx.	xx.	xx.	xx.
Beam Angle	FLOOD	12,5 W 1282 ¹ Lumen		Standard	xx.	xx.	xx.	xx.	99	00	00
	SPOT 26°	12,5 W 1550 ¹ Lumen UGR<19			xx.	xx.	xx.	xx.	26	00	00
	SPOT 34°	12,5 W 1550 ¹ Lumen			xx.	xx.	xx.	xx.	34	00	00

Order No. LIGHT HEAD FLOOD

Order No. LIGHT HEAD SPOT

Input voltage for all external power supply units and canopies is 220-240 VAC 50-60 Hz

Handcrafted in Germany, certified quality
 ETL Intertek
 Conforms to UL-STD 1598 Certified to CSA-STD C22.2 No.250.0-08
 IP 20
 Protective rating
 180° Tilttable
 360° Rotatable
 Light distribution direct
 Schutzklasse II Protection class II
 Luminaires are suitable for mounting on ordinary flammable materials, which have an inflammation point of at least 200° C / 392° F.

Technical data is subject to change. Errors and omissions excepted 1) Net lumen output: Losses due to diffusors and reflectors are considered. Lumen values refer to an ambient temperature of max. 35° C / 95° F. 2) Weight of lights without remote technical unit or canopy.