




SATTLER

AVVENI FLOOR 3



Product-information: Aluminium structure with three light heads. The light heads can be taken off and is fully adjustable through a magnetic hinge system. Light head is available as flood or spot versions (lenses with 26 and 34 degrees).

Design: Ulrich Sattler | Michael Schmidt, Code2design

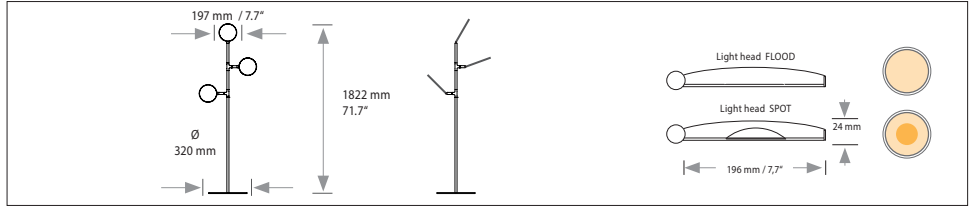

STRUCTURE

Type	H/Ø mm	H/Ø inches	LED Watt	weight kg ²⁾ / lbs ²⁾	STRUCTURE				
					Type No.	Finish 1	DIM	Power Supply Cable	Mounting Version
	H 1822 / Ø 320	H 71.7" / Ø 12.5	37,5 W	7,2 / 19.9	1110.	XX.	XX.	XX.	XX.
Finish 1 Structure	12 white matt RAL 9003 14 black matt 22 aluminium polished	Standard	XXXX. 12 XXXX. 14 XXXX. 22	XX. XX. XX.	XX. XX. XX.	XX. XX. XX.	XX. XX. XX.	XX. XX. XX.	
Dimmer	Push button for dimming CASAMBI	Standard	XXXX. XX. XXXX. XX.	07 08	XX. XX.	XX. XX.	XX. XX.	XX. XX.	
Power Supply Cable	power supply cable, 2800 mm / 110"	90 PVC black	Standard	XXXX. XX. XXXX. XX.	XX. XX.	XX. XX.	90 0N	XX. XX.	
Mounting Version	2500 mm / 98.4" power supply cable including country specific plug	please tick your plug version, further versions on request. <input type="checkbox"/> EURO <input type="checkbox"/> UK	Order No. STRUCTURE 90 0N						

LIGHT HEAD

Type	Finish 2	Finish 3	LED Kelvin	Beam angle			
				XX	XX	XX	
	XX.	XX.	XX.	XX.	XX.	XX.	
Finish 2 Light head outside ring	12 white matt RAL 9003 62 (14) black matt 22 aluminium polished Finish 2 must be the same as finish 1	Standard	XX. XX. XX.	12 62 22	XX. XX. XX.	XX. XX. XX.	XX. XX. XX.
Finish 3 Light head top cover	60 silver anodised 61 gold anodised 62 black anodised	Standard	XX. XX. XX.	XX. XX. XX.	60 61 62	XX. XX. XX.	XX. XX. XX.
LED	Extra warm-white 2700 K Warm-white 3000 K Neutral-white 4000 K		XX. XX. XX.	XX. XX. XX.	27 30 40	XX. XX. XX.	XX. XX. XX.
Beam Angle	FLOOD 3 x 12,5 W 1282 ¹ Lumen SPOT 26° 12,5 W 1550 ¹ Lumen UGR<19 SPOT 34° 12,5 W 1550 ¹ Lumen	Standard	XX. XX. XX.	XX. XX. XX.	99 26 34	00 00 00	00 00 00

Metal stand Ø 320 mm / 12.5"
 Colour:
 Finish 1, structure white (12) – Stand white (12)
 Finish 1, structure black (14) – Stand black (14)
 Finish 1, structure polished (22) – Stand black (14)

Quantity Order No. LIGHT HEAD

Quantity Order No. LIGHT HEAD

Flood and spot heads may be mixed within one structure

Quantity Order No. Accessories (page 2)

Input voltage for all external power supply units and canopies is 100-240 VAC 50-60 Hz

Handcrafted in Germany, certified quality
 IP 20 Protective rating
 180° Tilttable
 360° Rotatable
 Light distribution direct
 Protection class III: only suitable for very low voltage supply (<50V)
 Luminaires are suitable for mounting on ordinary flammable materials, which have an inflammation point of at least 200° C / 392° F.

Technical data is subject to change. Errors and omissions excepted 1) Net lumen output: Losses due to diffusors and reflectors are considered. Lumen values refer to an ambient temperature of max. 35° C / 95° F. 2) Weight of lights without remote technical unit or canopy.

AVVENI

ACCESSORIES

CASAMBI WALL SWITCH




CASAMBI wall-switch
CASAMBI wall-switch

white
black

207. 00. 00. 00. 11
207. 00. 00. 00. 10

Casambi wall-switch is a wireless user interface that can be configured via the Casambi app. The four target buttons can control a scene or an animation of the user's choice or simply one luminaire, one luminaire group or all lights together if so desired. Up to 4 groups may be separately programmed. It comes with a wall mounting plate. The switch can be attached to the plate as it is equipped with magnets.

Power cable cover plate



Consisting of a cavity ceiling box with 80mm round metal cover.
Applicable to mounting version A/B.

white

200. 00. 00. 00. 12