

AVVENI


PENDANT 6 | 8



SATTLER

Product-information: Aluminium structure with six / eight light heads. Each light head can be taken off and is fully adjustable through a magnetic hinge system. Light heads are available as flood or spot versions (lenses with 26 and 34 degrees). Cable suspensions are adjustable.

Design: Ulrich Sattler | Michael Schmidt, Code2design

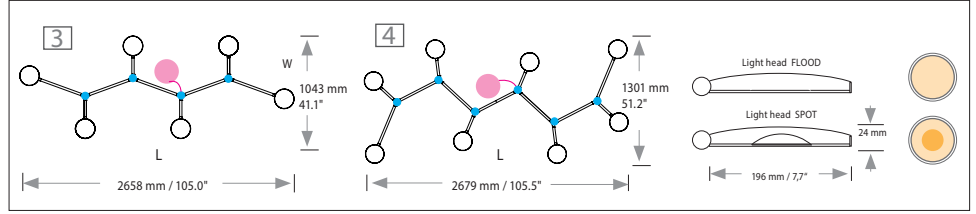

STRUCTURE



Type	L / W mm	L / W inches	LED Watt	weight kg ²⁾ / lbs ²⁾
3	L 2658 / W 1043	L 105.0 / W 41.1"	75 W	5,3 / 11.7
4	L 2679 / W 1301	L 105.5 / W 51.2"	100 W	7,1 / 15.7

STRUCTURE

Type No.	Finish 1	DIM	Power Supply Cable	Mounting Version
1135.	XX.	XX.	XX.	XX.
1140.	XX.	XX.	XX.	XX.
XXXX.	12	XX.	XX.	XX.
XXXX.	14	XX.	XX.	XX.
XXXX.	22	XX.	XX.	XX.
XXXX.	XX.	05	XX.	XX.
XXXX.	XX.	06	XX.	XX.
XXXX.	XX.	08	XX.	XX.
XXXX.	XX.	XX.	70	XX.
XXXX.	XX.	XX.	00	XX.
XXXX.	XX.	XX.	XX.	0x.

Finish 1 Structure	12 white matt RAL 9003	14 black matt	22 aluminium polished	Standard
	Dimmer			
	0 - 10 V DALI CASAMBI			

Cable	power supply cable, silver 5000 mm (A/B)	Standard
	without power supply cable, current-carrying suspension (R) 3000mm (optional, type 3 only)	

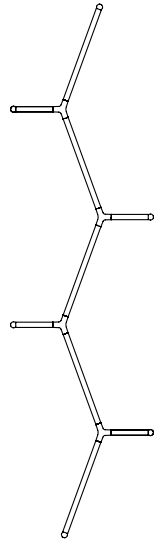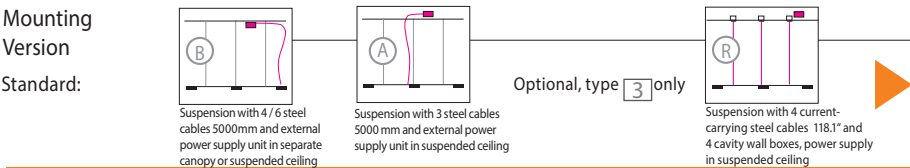

LIGHT HEAD

Type	Finish 2	Finish 3	LED	Beam angle
Finish 2 Light head outside ring	12 white matt RAL 9003	62 (14) black matt	22 aluminium polished	Standard
	Finish 2 must be the same as finish 1			
	60 silver anodised	61 gold anodised	62 black anodised	Standard
Finish 3 Light head top cover				Standard
	LED			
	CRI >92			
Beam Angle	Extra warm-white 2700 K			Standard
	Warm-white 3000 K			
	Neutral-white 4000 K			

LIGHT HEAD

Type No.	Finish 2	Finish 3	LED	Beam angle
01	XX.	XX.	XX.	XX. XX. XX.
Standard	XX.	12	XX.	XX. XX. XX.
	XX.	62	XX.	XX. XX. XX.
	XX.	22	XX.	XX. XX. XX.
Standard	XX.	XX.	60	XX. XX. XX. XX.
	XX.	XX.	61	XX. XX. XX. XX.
	XX.	XX.	62	XX. XX. XX. XX.
Standard	XX.	XX.	27	XX. XX. XX.
	XX.	XX.	30	XX. XX. XX.
	XX.	XX.	40	XX. XX. XX.
Standard	XX.	XX.	XX.	99 00 00
	XX.	XX.	XX.	26 00 00
	XX.	XX.	XX.	34 00 00

Quantity Order No. LIGHT HEAD

Quantity Order No. LIGHT HEAD

Flood and spot heads may be mixed within one structure

Quantity Order No. Accessories (page 2)



Technical data is subject to change. Errors and omissions excepted 1) Net lumen output: Losses due to diffusors and reflectors are considered. Lumen values refer to an ambient temperature of max. 35° C / 95° F. 2) Weight of lights without remote technical unit or canopy.


AVVENI

PENDANT 6|8


www.sattler-lighting.com



Product- Aluminium structure with six / eight light heads.
information: Each light head can be taken off and is fully adjustable through a magnetic hinge system. Light heads are available as flood or spot versions (lenses with 26 and 34 degrees). Cable suspensions are adjustable.
Design: Ulrich Sattler | Michael Schmidt, Code2design

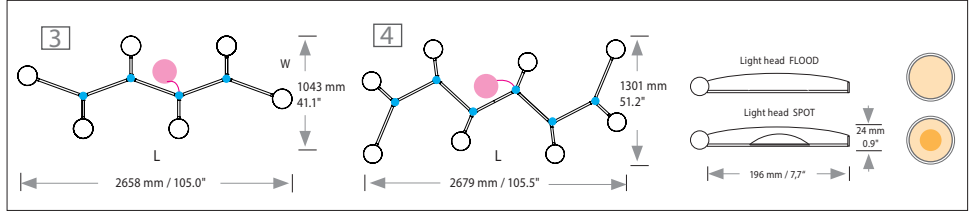

MOUNTING VERSION

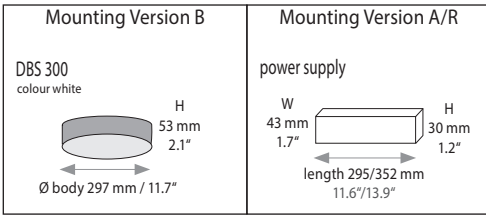

Input voltage for all external power supply units and canopies is 220-240 VAC 50/60 Hz

ACCESSORIES


CASAMBI WALL SWITCH



CASAMBI wall-switch	white	207. 00.00.00.11
CASAMBI wall-switch	black	207. 00.00.00.10

Casambi wall-switch is a wireless user interface that can be configured via the Casambi app. The four target buttons can control a scene or an animation of the user's choice or simply one luminaire, one luminaire group or all lights together if so desired. Up to 4 groups may be separately programmed. It comes with a wall mounting plate. The switch can be attached to the plate as it is equipped with magnets.

Power cable cover plate



Consisting of a cavity ceiling box with 80mm round metal cover.
 Applicable to mounting version A/B.

white	200. 00.00.00.12
-------	------------------