



# SATTLER

## AVVENI




PURE CEILING / WALL




**Product-information:** Aluminium structure with 1 light head. Light head can be taken off and is fully adjustable through a magnetic hinge system. Light heads are available as flood or spot versions (lenses with 26 and 34 degrees). Cable suspensions are adjustable.

**Design:** Ulrich Sattler | Michael Schmidt, Code2design

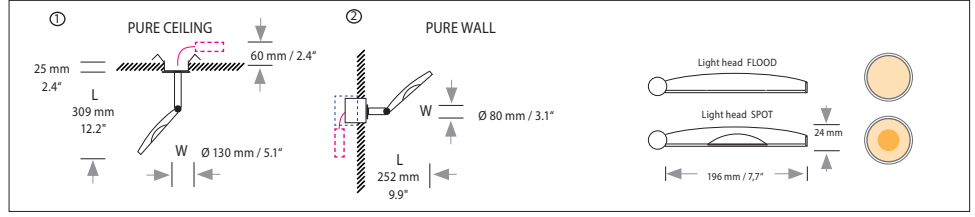


### STRUCTURE

Type	W Ø / L mm	W Ø / L inches	LED Watt	weight kg <sup>2)</sup> / lbs <sup>2)</sup>	STRUCTURE				
PURE CEILING	① Ø 130 / 309	Ø 5.1 / 12.2	12,5 W	1.0 / 2.2	Type No.	Finish 1	DIM	Power Supply Cable	Mounting Version
PURE WALL	② Ø 80 / 252	Ø 3.1 / 9.9	12,5 W	1.0 / 2.2	1114.	XX.	XX.	XX.	XX.
Finish 1 Structure	12 white matt RAL 9003	14 black matt	22 aluminium polished		XXXX.	12	XX.	XX.	XX.
Dimmer	DALI-2 TRIAC		Standard		XXXX.	14	XX.	XX.	XX.
Power Supply Cable	without power supply cable				XXXX.	XX.	06	XX.	XX.
Mounting Version	U with ceiling thickness ≤ 25 mm				XXXX.	XX.	11	XX.	XX.

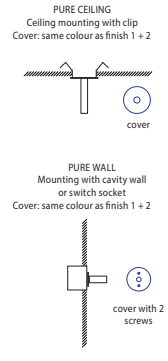

**Pure ceiling / wall**  
Space for external power supply must be considered



- ① PURE CEILING cutout ceiling: Ø 100 mm / 3.9"
- ② PURE WALL cutout wall: Cavity wall socket Ø 68 mm / 2.7" suitable for cavity wall or switch socket, mounting cover with 2 screws

Order No. STRUCTURE

### LIGHT HEAD

Type	Finish 2	Finish 3	LED Kelvin	Beam angle	Type No.	Finish 2	Finish 3	LED	Beam angle
Finish 2 Light head outside ring	12 white matt RAL 9003	62 (14) black matt	22 aluminium polished		Standard	XX.	12	XX.	XX.
Finish 3 Light head top cover	60 silver anodised	61 gold anodised	62 black anodised		Standard	XX.	XX.	60	XX.
LED	Extra warm-white 2700 K				XX.	XX.	XX.	27	XX.
CRI >92	Warm-white 3000 K				XX.	XX.	XX.	30	XX.
SELV	Neutral-white 4000 K				XX.	XX.	XX.	40	XX.
Beam Angle	FLOOD	12,5 W   1282 <sup>1)</sup> Lumen			Standard	XX.	XX.	XX.	99 00 00
	SPOT 26°	12,5 W   1550 <sup>1)</sup> Lumen   UGR<19				XX.	XX.	XX.	26 00 00
	SPOT 34°	12,5 W   1550 <sup>1)</sup> Lumen				XX.	XX.	XX.	34 00 00

Order No. LIGHT HEAD FLOOD

Order No. LIGHT HEAD SPOT

Input voltage for all external power supply units and canopies is 220-240 VAC 50-60 Hz

Technical data is subject to change. Errors and omissions excepted 1) Net lumen output: Losses due to diffusors and reflectors are considered. Lumen values refer to an ambient temperature of max. 35° C / 95° F. 2) Weight of lights without remote technical unit or canopy.