




AVVENI SINGLE




Product-information: Aluminium structure with 1 light head. Light head can be taken off and is fully adjustable through a magnetic hinge system. Light heads are available as flood or spot versions (lenses with 26 and 34 degrees). Cable suspensions are adjustable.

Design: Ulrich Sattler | Michael Schmidt, Code2design

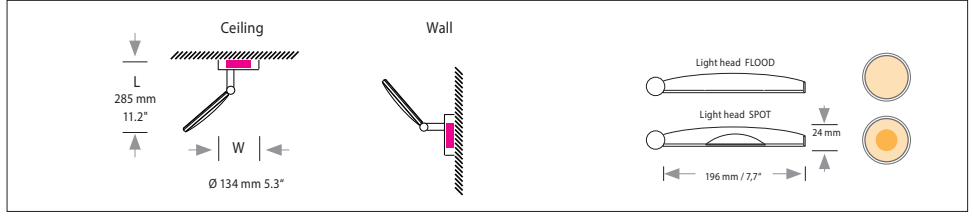

STRUCTURE


Type	W Ø / L mm	W Ø / L inches	LED Watt	weight kg ²⁾ / lbs ²⁾	STRUCTURE				
					Type No.	Finish 1	DIM	Power Supply	Mounting Cable
	Ø 134 / 285	Ø 5.3 / 11.2"	12,5 W	1.6 / 3.5	1112.	XX.	XX.	XX.	XX.
Finish 1 Structure	12 white matt RAL 9003 14 black matt 22 aluminium polished				XXXX.	12	XX.	XX.	XX.
Dimmer	DALI-2 CASAMBI TRIAC		Standard		XXXX.	XX.	06	XX.	XX.
Power Supply Cable	without power supply cable				XXXX.	XX.	XX.	00	XX.
Mounting Version	P Direct ceiling mounting with power supply unit in canopy		Standard		XXXX.	XX.	XX.	00	0P



Order No. STRUCTURE

LIGHT HEAD

Type	Finish 2	Finish 3	LED Kelvin	Beam angle						
				XX	XX	XX				
				01	XX.	XX.	XX.	XX.	XX.	XX.
Finish 2 Light head outside ring	12 white matt RAL 9003 62 (14) black matt 22 aluminium polished Finish 2 must be the same as finish 1			Standard	XX.	12	XX.	XX.	XX.	XX.
Finish 3 Light head top cover		60 silver anodised 61 gold anodised 62 black anodised		Standard	XX.	XX.	60	XX.	XX.	XX.
LED	LED SELV		Extra warm-white 2700 K Warm-white 3000 K Neutral-white 4000 K		XX.	XX.	27	XX.	XX.	XX.
Beam Angle			FLOOD 12,5 W 1282 ¹⁾ Lumen SPOT 26° 12,5 W 1550 ¹⁾ Lumen UGR<19 SPOT 34° 12,5 W 1550 ¹⁾ Lumen		XX.	XX.	XX.	XX.	99	00

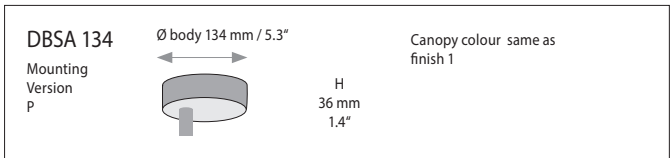

Order No. LIGHT HEAD FLOOD

Order No. LIGHT HEAD SPOT

Order No. Accessories (page 2)

Input voltage for power supply units is 220-240 VAC 50/60 Hz

Luminaires are suitable for mounting on ordinary flammable materials, which have an inflammation point of at least 200° C / 392° F.

Technical data is subject to change. Errors and omissions excepted 1) Net lumen output: Losses due to diffusors and reflectors are considered. Lumen values refer to an ambient temperature of max. 35° C / 95° F. 2) Weight of lights without remote technical unit or canopy.

AVVENI

ACCESSORIES

CASAMBI WALL SWITCH




CASAMBI wall-switch
CASAMBI wall-switch

white
black

207. 00. 00. 00. 11
207. 00. 00. 00. 10

Casambi wall-switch is a wireless user interface that can be configured via the Casambi app. The four target buttons can control a scene or an animation of the user's choice or simply one luminaire, one luminaire group or all lights together if so desired. Up to 4 groups may be separately programmed. It comes with a wall mounting plate. The switch can be attached to the plate as it is equipped with magnets.

Power cable cover plate



Consisting of a cavity ceiling box with 80mm round metal cover.
Applicable to mounting version A/B.

white

200. 00. 00. 00. 12