# SATTLER


### DOPPIO LINEA DIRECT / INDIRECT

Aluminium profile with integrated opal diffusers



Housing:

SATTLER

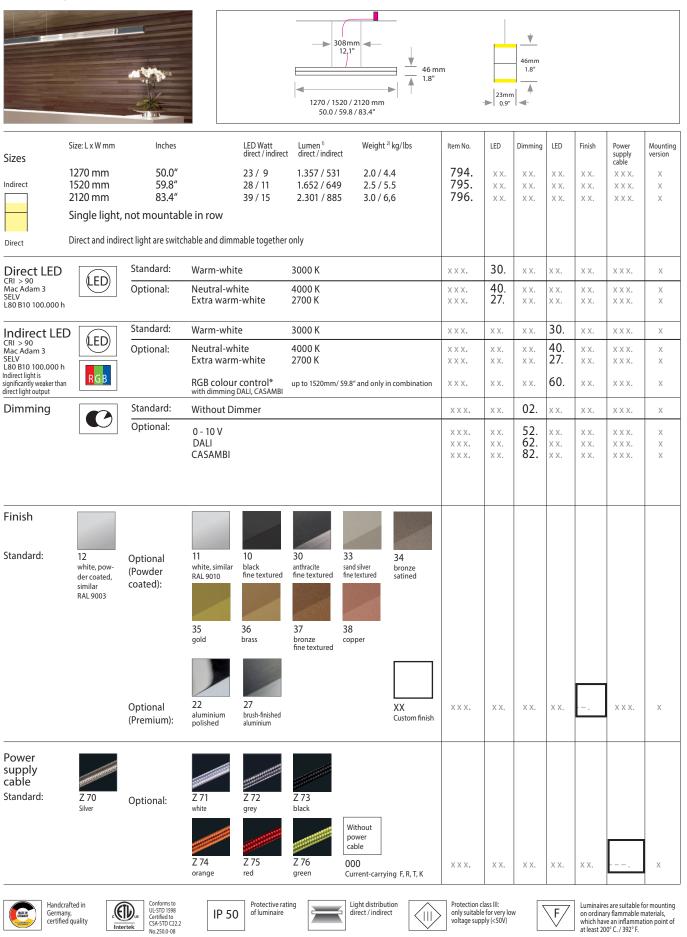

8.11.23 DOPPIO LINEA DIRECT / INDIRECT

www.sattler-lighting.com

Technical data is subject to change. Errors and omissions excepted 1) Net lumen output: Losses due to diffusers and reflectors are considered. Lumen values refer to an ambient temperature of max. 35° C. / 95° F. 2) Weight of lights without remote technical unit or canopy.

# \ I I I F I

Housing:

## **DOPPIO LINEA DIRECT / INDIRECT**



### SATTLER Design: 308mm 12,1" 46 mm 1.8 A 1270 / 1520 / 2120 mm

Aluminium profile with integrated opal diffusers

#### ¥ 46mm 1.8 23mm 0.9 **b**

#### 50.0 / 59.8 / 83.4 Mounting version Item No. LED Dimming LED Finish Mounting Standard supply cable version F хx. ххх ХХ XХ. ΧХ R ХХХ, Suspension with current-carrying steel cables and cavity wall box. Not in combination with RGB. 2-point suspension Current-carrying steel cables. Not in combination Suspension through canopy with external power supply unit in suspended ceiling with RGB A, R = Distance of external power supply unit to light fixture max. 10m / 394". Including steel cable suspension 3000mm / 118.1" or/and power supply cable 3000mm / 118.1" Complete order number Power supply units: Canopy: Type / Size mm / inch L x W x H For use with Mounting version Protective Type/ Size mm / inch For use with Protective rating Mounting version rating IP 10 DBL 390 L 390 x W 70 x H 70 mm E, F DE 1F 363 x 143 x 56 mm / 14.2 x 5.6 x 2.2" A,R IP 20 L 15.4 x W 2.8 x H 2.8 mm In combination with RGB W In combination with RGB: IP 20 DE 2F 363 x 283 x 56 mm / 14.2 x 11.1 x 2.2 А DBL 490 L 492 x W 70 x H 70 mm E, F IP 10 L 119.4 x W 2.8 x H 2.8 mm Colour: 12 white, similar RAL 9003, contact factory for other finishes Input voltage for all external power supply units and canopy is 220-240 VAC 50-60 Hz USA/Canada: Canopy mounts to 4" octagonal junction box. Optional CASAMBI wall-switch 207. 00. 00. 00. 12. (white) 207. 00. 00. 00. 10. (black) Casambi wall-switch is a wireless user interface that can be configured via the Casambi app. The four target buttons can control a scene or an animation of the user's choice or simply one luminaire, one luminaire group or all lights together if so desired. Up to 4 groups may be separately programmed. It comes with a wall mounting plate. The switch may be also used on its own as it is attached to the wall plate using magnets. Power cable cover plate for mounting version A 200. 00. 00. 00. 12. (white) Consisting of a cavity ceiling box with 80mm round metal cover. Applicable to mounting version A.. Protection class III: only suitable for very low voltage supply (<50V) Protective rating of luminaire Luminaires are suitable for mounting on ordinary flammable materials, Handcrafted in Direct / indirect (II) UL-STD 1598 Certified to CSA-STD C22.2 No.250.0-08 IP 50 F Germany, certified quality light distribution

www.sattler-lighting.com

which have an inflammation point of at least 200° C. / 392° F.